

AD-A093 921


NAVAL WEAPONS SUPPORT CENTER CRANE IN
FLEET RELIABILITY ASSESSMENT PROGRAM. VOLUME 2A. EQUIPMENT REPO--ETC(U)
SEP 79

F/G 17/7

UNCLASSIFIED

NL

1 OF 1
2-1-80

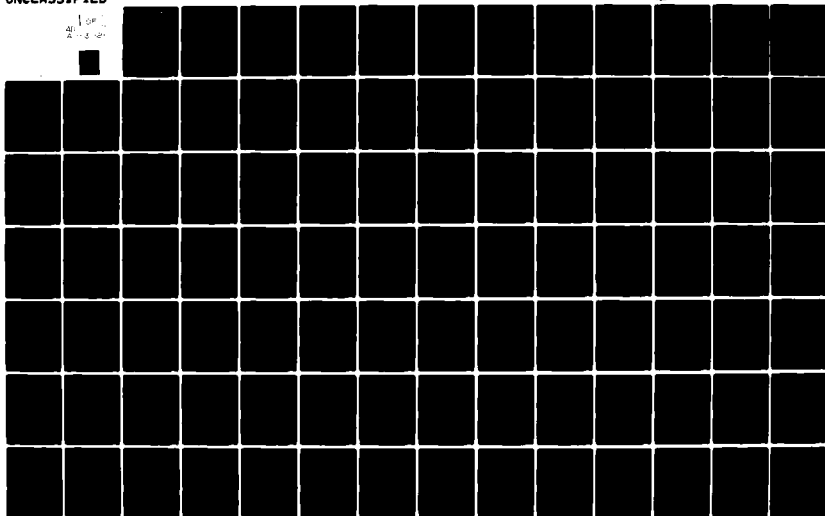

9 FINAL REPORT.

VOLUME 2A

Approved for public
release; distribution
unlimited

11 Sep 77

12 2041

1

AD A093921



(1) Fleet Reliability Assessment
Program. Volume 2A.

EQUIPMENT REPORT

CATCC-DAIR.

NAVAL WEAPONS SUPPORT CENTER
CRANE, INDIANA

Published by the direction of Commander Naval Electronics Systems Command

SEPTEMBER 1979

401322

80 7 16 011

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Final Report Volume 2A Fleet Reliability Assessment Program - Equipment Report CATCC DAIR A068856		5. TYPE OF REPORT & PERIOD COVERED Reliability
7. AUTHOR(s) NAVAL WEAPONS SUPPORT CENTER		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS NAVAL WEAPONS SUPPORT CENTER C.O. NAVAL WEAPONS SUPPORT CENTER CRANE INDIANA 47522		8. CONTRACT OR GRANT NUMBER(s) Work to August 1, 1979 N0139-1 WKE 7002
11. CONTROLLING OFFICE NAME AND ADDRESS NAVAL ELECTRONIC SYSTEMS COMMAND WASHINGTON D.C. Code 4702		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE Sept 1979
		13. NUMBER OF PAGES 98
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Reliability, Maintenance, Fleet operations, Carrier Air Traffic Controls		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) + The report contains a reliability assessment of data reported from three carriers. Data was collected over approximately a nine month period on the carrier. The data was collected from direct observation and interviews. The estimated reliability of the data is 100%.		

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)



SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

RESPONSIBILITY. The controlling DoD office will be responsible for completion of the Report Documentation Page, DD Form 1473, in all technical reports prepared by or for DoD organizations.

CLASSIFICATION. Since this Report Documentation Page, DD Form 1473, is used in preparing announcements, bibliographies, and data banks, it should be unclassified if possible. If a classification is required, identify the classified items on the page by the appropriate symbol.

COMPLETION GUIDE

General. Make Blocks 1, 4, 5, 6, 7, 11, 13, 15, and 16 agree with the corresponding information on the report cover. Leave Blocks 2 and 3 blank.

Block 1. Report Number. Enter the unique alphanumeric report number shown on the cover.

Block 2. Government Accession No. Leave Blank. This space is for use by the Defense Documentation Center.

Block 3. Recipient's Catalog Number. Leave blank. This space is for the use of the report recipient to assist in future retrieval of the document.

Block 4. Title and Subtitle. Enter the title in all capital letters exactly as it appears on the publication. Titles should be unclassified whenever possible. Write out the English equivalent for Greek letters and mathematical symbols in the title (see "Abstracting Scientific and Technical Reports of Defense-sponsored RDT/E," AD-667 000). If the report has a subtitle, this subtitle should follow the main title, be separated by a comma or semicolon if appropriate, and be initially capitalized. If a publication has a title in a foreign language, translate the title into English and follow the English translation with the title in the original language. Make every effort to simplify the title before publication.

Block 5. Type of Report and Period Covered. Indicate here whether report is interim, final, etc., and, if applicable, inclusive dates of period covered, such as the life of a contract covered in a final contractor report.

Block 6. Performing Organization Report Number. Only numbers other than the official report number shown in Block 1, such as series numbers for in-house reports or a contractor/grantee number assigned by him, will be placed in this space. If no such numbers are used, leave this space blank.

Block 7. Author(s). Include corresponding information from the report cover. Give the name(s) of the author(s) in conventional order (for example, John R. Doe or, if author prefers, J. Robert Doe). In addition, list the affiliation of an author if it differs from that of the performing organization.

Block 8. Contract or Grant Number(s). For a contractor or grantee report, enter the complete contract or grant number(s) under which the work reported was accomplished. Leave blank in in-house reports.

Block 9. Performing Organization Name and Address. For in-house reports enter the name and address, including office symbol, of the performing activity. For contractor or grantee reports enter the name and address of the contractor or grantee who prepared the report and identify the appropriate corporate division, school, laboratory, etc., of the author. List city, state, and ZIP Code.

Block 10. Program Element, Project, Task Area, and Work Unit Numbers. Enter here the number code from the applicable Department of Defense form, such as the DD Form 1498, "Research and Technology Work Unit Summary" or the DD Form 1634, "Research and Development Planning Summary," which identifies the program element, project, task area, and work unit or equivalent under which the work was authorized.

Block 11. Controlling Office Name and Address. Enter the full, official name and address, including office symbol, of the controlling office. (Equates to funding/sponsoring agency. For definition see DoD Directive 5200.20, "Distribution Statements on Technical Documents.")

Block 12. Report Date. Enter here the day, month, and year or month and year as shown on the cover.

Block 13. Number of Pages. Enter the total number of pages.

Block 14. Monitoring Agency Name and Address (if different from Controlling Office). For use when the controlling or funding office does not directly administer a project, contract, or grant, but delegates the administrative responsibility to another organization.

Blocks 15 & 15a. Security Classification of the Report: Declassification/Downgrading Schedule of the Report. Enter in 15 the highest classification of the report. If appropriate, enter in 15a the declassification/downgrading schedule of the report, using the abbreviations for declassification/downgrading schedules listed in paragraph 4-207 of DoD 5200.1-R.

Block 16. Distribution Statement of the Report. Insert here the applicable distribution statement of the report from DoD Directive 5200.20, "Distribution Statements on Technical Documents."

Block 17. Distribution Statement (of the abstract entered in Block 20, if different from the distribution statement of the report). Insert here the applicable distribution statement of the abstract from DoD Directive 5200.20, "Distribution Statements on Technical Documents."

Block 18. Supplementary Notes. Enter information not included elsewhere but useful, such as: Prepared in cooperation with . . . Translation of (or by) . . . Presented at conference of . . . To be published in . . .

Block 19. Key Words. Select terms or short phrases that identify the principal subjects covered in the report, and are sufficiently specific and precise to be used as index entries for cataloging, conforming to standard terminology. The DoD "Thesaurus of Engineering and Scientific Terms" (TEST), AD-672 000, can be helpful.

Block 20. Abstract. The abstract should be a brief (not to exceed 200 words) factual summary of the most significant information contained in the report. If possible, the abstract of a classified report should be unclassified and the abstract to an unclassified report should consist of publicly-releasable information. If the report contains a significant bibliography or literature survey, mention it here. For information on preparing abstracts see "Abstracting Scientific and Technical Reports of Defense-Sponsored RDT&E," AD-667 000.

LIST OF EFFECTIVE PAGES

Insert latest changed pages; dispose of superceded pages in accordance with applicable regulations.

NOTE: On a changed page, the portion of the text affected by the latest change is indicated by a vertical line (or other change symbol) in the outer margin of the page. Changes to illustrations are indicated by miniature pointing hands. Changes to wiring diagrams are indicated by shaded areas.

Total number of pages in this Volume is 104 consisting of the following:

<u>PAGE NO.</u>	<u>*CHANGE NO.</u>
Title	0
A	0
i to iv	0
1 to 98	0


* Zero in this column indicates an original page.

DEPARTMENT OF THE NAVY
NAVAL ELECTRONICS SYSTEMS COMMAND


PREPARED UNDER THE DIRECTION OF


W. WALLACE
RELIABILITY ENGINEERING BRANCH

REVIEWED BY

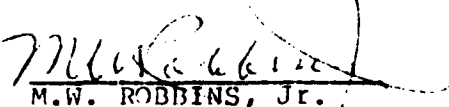
M.W. ROBBINS, JR.
SYSTEMS EFFECTIVENESS DIVISION

APPROVED BY


L.R. VON PERBANDT
CAPTAIN, USN
DEP CDR LOGISTICS DIRECTORATE

RECORD OF CHANGES

CHANGE NO.	DATE	TITLE OR BRIEF DESCRIPTION	ENTERED BY

VOLUME 2A CATCC-DAIR

EQUIPMENT REPORT

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
I RESULTS	1
1-1 RESULTS SUMMARY	1
1-1.1 SUMMARY OF HARDWARE PROBLEMS	
1-1.2 SOFTWARE PROBLEMS	
1-1.3 RECOMMENDATIONS	
II SYSTEM DESCRIPTION	4
2-1 GENERAL	4
2-2 MISSION	4
2-3 EQUIPMENT DESCRIPTION	4
III SPECIFICATIONS	6
3-1 RELIABILITY	6
3-2 MAINTAINABILITY	6
IV PROBLEMS	7
4-1 ADDITIONAL HARDWARE PROBLEMS	7
4-2 SOFTWARE PROBLEMS	7
V CORRECTIVE ACTIONS	8
5-1 HARDWARE CORRECTIVE ACTIONS	8
5-2 SOFTWARE CORRECTIVE ACTIONS	8
VI EQUIPMENT RELIABILITY MODEL	9
VII ANALYSES	13
7-1 SOFTWARE ANALYSIS	13
7-2 HARDWARE ANALYSIS	13

Subsection(1) CATCC-DAIR All Data	14
Subsection(2) CATCC-DAIR All Data Except INDEPENDENCE	27
Subsection(3) CATCC-DAIR EQUIPMENT RELIABILITY DATA	50
Subsection(4) CATCC-DAIR PARTS REPLACEMENT	75

LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6-1a	SYSTEM/WRA-Level Reliability Block Diagram for CATCC-DAIR AN/TPX-42A(V)8	10
6-1b	CATCC-DAIR SYSTEM Block Diagram (Continued)	11
6-1c	CATCC-DAIR SYSTEM Block Diagram (Continued)	12

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
1-1	DATA SUMMARY FOR CATCC-DAIR	2
1-2	SUMMARY OF WRA AND O-LEVEL ASSEMBLIES FAILING	3

VOLUME 2 CATCC-DAIR EQUIPMENT REPORT

SECTION I - RESULTS

1-1 RESULTS SUMMARY

Between August 1978 and May 1979 FRAP collected data on the AN/TPX-42A(V)8 CATCC-DAIR systems installed aboard the USS INDEPENDENCE, USS KITTY HAWK, and the USS RANGER. The results of the analysis of the data are summarized in Table 1-1. ✓

1-1.1 SUMMARY OF HARDWARE PROBLEMS

Most of the failures (7 out of 11) occurred in WRA 19, the Control Group PPI Console, OD-146, of which 5 are used in the CATCC-DAIR system. Most of these failures (3 out of 7) were O-level 19002, the Deflection Amplifier. Table 1-2 summarizes the WRA and O-levels reported as failed. Identification WRA and O-levels are as follows:

WRA 11	Signal Processor CN-1506
WRA 13	A-D Converter CV-3477
WRA 16	Cartridge Mag Tape Unit AN/USH-26(v)
WRA 18	Alphanumeric Digital Display AN/USQ-69
WRA 19	Indicator Control Group OD-146
19002	Deflection Amplifier
19008	Interface and Logic
19009	Video Amplifier
19016	Panel (Right Side)

[O-level 099 indicates the O-level failed could not be identified from the available information]

1-1.2 SOFTWARE PROBLEMS

CATCC-DAIR is currently recovering from very severe problems with the software used in the Tracking and Display computer. The software in use during the FRAP study period is an interim release which will be replaced by a "fourth generation" software package currently under development.

1-1.3 RECOMMENDATIONS

a. It is recommended that FCPs and retrofits be developed to improve the reliability performance of the Control Group Console, OD-146, with emphasis on the Deflection Amplifier and Power Supply.

b. It is recommended that the "Human Engineered" keyboards be replaced with standard typewriter or teletype style keyboards.

c. It is also recommended that consideration be given to converting the AN/UYK-20(V) to use Concurrent Pascal, a new high-level programming language.

d. It is recommended that the feasibility of converting CATCC-DAIR software to Pascal be investigated.

LEGEND

1. All Data = All Collected Data (Failures/Maintenance Actions)**
2. EQUIP = EQUIPMENT **
3. PARTS = PARTS REPLACEMENT **
4. EXP = EXPONENTIAL
5. LN = LOGNORMAL

TABLE 1-1. DATA SUMMARY FOR CATCC-DAIR.			
PARAMETER	All Data	EQUIP	PARTS
OPERATIONAL			
Calendar Hours	11,616	11,616	11,616
Operating Hours	5073	5073	5073
Duty Cycle	0.437	0.437	0.437
Sample Size	2*	2*	2*
RELIABILITY			
Number of Failures	12	10	9
Time Between Failures-Mean	661	971	1304
Time Between Failures-Median	111	126	111
Distribution	WEIBULL	WEIBULL	WEIBULL
MAINTAINABILITY			
Total Repair Time	126	110	110
Number of Repairs	7	6	8
Time to Repair-Mean	18	18.3	17.5
Time to Repair-Median	5.3	4.4	4.6
Distribution	LN	LN	LN
Total Down Time	1132	772	783
Repairs (or Maint. Act.)	7	6	8
Down Time-Mean	162	129	102
Down Time-Median	112	89	46
Distribution	EXP	EXP	WEIBULL
AVAILABILITY			
Inherent	0.9734	0.9815	0.9868
Observed-Mean	---	0.525	---
Observed-Median	---	0.577	---
Effective	0.9996	---	---

* CATCC-DAIR SUMMARY Does Not Include USS INDEPENDENCE Data.

** Reference Volume 1, Paragraph 3-4, and Volume 2A, Paragraph 7-2

NOTE: All Time Units Are in Hours

TABLE 1-2. SUMMARY OF WRA AND O-LEVEL
ASSEMBLIES FAILING

		DESCRIPTION (NAME)	NUMBER OF FAILURES REPORTED			
WRA	O-LEVEL		by 4790/2K	by CASREPT	in WRA	in O-LEVEL
11		SIG. PROC. CN-1506/TPX				
	099	---	1		1	1
13		R/D CONVTR CV-4377/TPX				
	007	POWER SUPPLY		/1	1	1
16		MAG TAPE DRV AN/USM-26				
	099	---	1		1	1
18		DISPLAY AN/USQ-69				
	003	CRT DRIVER ELECTRONICS	1		1	1
19		CONTROL GROUP OD-146	6	1/	7	
	002	DEFLECTION AMPLIFIER	/3			3
	008	INTERFACE AND LOGIC	/1			1
	009	VIDEO AMPLIFIER	/1			1
	016	PANEL (RIGHT SIDE)	/1			1
	099	---		/1		1
TOTAL			9	/2	11	11

SECTION II - SYSTEM DESCRIPTION

2-1 GENERAL

The Carrier Air Traffic Control Center Direct Altitude and Identity Readout (CATCC-DAIR) System consists of a programmable Interrogator Set AN/TPX-42A(V)8 in which the hardwired Indicator Data Processor of the AN/TPX-42A(V)5 has been replaced by an electronic digital mini-computer, the AN/UYK-20(V). To enhance reliability, a second AN/UYK-20(V) may be installed in a parallel redundant scheme. All systems in the FRAP study were so configured.

CATCC-DAIR provides five consoles consisting of OD-58/T Plan Position Indicators (PPI) modified to display alphanumeric information. To each of these has been added a keyboard to allow control of the AN/UYK-20(V) Tracking and Display Processor (TDP) Computer, and an Indicator Control box. One console, designated the supervisory position, has an additional System Control box attached. The TDP Computer(s) are normally located remotely from the consoles and are rack mounted with the radar video processor and other such ancillary and interface equipment as required to interface to the NTDS and ACLS systems and the shipboard radars.

The older AN/TPX-42A(V)5 is installed at Navy and Marine Corps air stations. The (V)8 version, CATCC-DAIR, is essentially the (V)5 system hardware with minor changes (primarily to the power supplies) to allow operation from ship's power and to provide interface into existing ship's radar and data system. The TDP computer with its software provides the operational features that distinguish the (V)8 version from the less capable (V)5 system.

2-2 MISSION

CATCC-DAIR is used to identify and coordinate aircraft operating within a fifty mile radius of the aircraft carrier on which it is installed. In addition to a conventional radar display, CATCC-DAIR provides altitude and identity readouts on all transponder equipped aircraft, both civilian and military, in that 50 mile radius. In addition a number of software features are provided to support flight operations. CATCC-DAIR is normally operational at all times while the ship is underway. This system is essential to the safety and combat readiness of the ship on which it is installed.

2-3 EQUIPMENT DESCRIPTION

The CATCC-DAIR system is a shipboard configuration of the AN/TPX-42A(V)5 currently used at all Naval and Marine Air Station RATCCs (Radar Air Traffic Control Centers). Though similar in appearance, CATCC-DAIR uses a programmable TDP (Tracking and Display Processor), which replaces the hardwired indicator data processor in the AN/TPX-42A(V)5. The TDP consists of (a) two AN/UYK-20 data processing sets, (b) a keyboard for communications with the computers, (c) an OD-58/T indicator modified for display of alphanumeric data, (d) a radar video processor, (e)

various ancillary computer equipment, and (f) the required interface hardware that will permit the system to function and be compatible with shipboard radars, and interface with NTDS (Naval Tactical Data System) and ACLS (Automatic Carrier Landing System).

The system is designed for dual-channel processing (one channel active and the other in hot standby), and has the capability to switch channels, if a failure occurs, without loss of data or interruption to operations. The CATCC-DAIR system consists of the following major units:

a. Data Processing Group OL-201

(1) [WRA 10] Interference Blanker MX-8757/UPX. Eliminates non-synchronous signals, sometimes referred to as "fruit", and sends "defruited" video to the signal processor.

(2) [WRA 13] Analog-to-Digital Converter CV-3477. Accepts single speed synchro (antenna shaft) inputs and outputs two signals, the ARP (Azimuth Reference Pulse) and the ACP (Azimuth Change Pulse). Three units provide ACP/ARPs for two radars, with the extra unit on standby.

(3) [WRA 11] Signal Processor CN-1506. Re-formats the video and mode tags received from either the AN/UPX-233 or the AN/UPX-27 into video and mode sensitive triggers.

(4) Video Signal Processor CP-1310. Generates a signal report message, one per antenna scan, for each transponder equipped aircraft within a selected range. After it is properly formatted, the output message is transmitted to the data processor shortly after the beam of the antenna has passed the position of the aircraft. An extra CP-1310 is provided for dual-channel capability.

(5) Radar Target Data Processor CP-1319. Detects the primary radar normal video, triggers, and azimuth data and develops a signal digital report for each aircraft on each antenna scan. The radar target data processor transfers the messages to the tracking display processor.

b. Conversion-Switching Group OU-131

(1) [WRA 15] Signal Data Converter CV-3476. Has dual channels "A" and "B", one active and one in hot standby, which transfer data between the AN/UYK-20(V) data processing set, keyset control, ACLS, NTDS, CP-1319 and ADD (Alphanumeric Digital Display) utilizing the relay switching assembly. Acts as the AN/UYK-20(V) device controller for video signal processors data, the analog-to-digital converter ACP data and PEM (Position Encoding Module) lines.

(2) [WRA 14] Data Processing Set AN/UYK-20(V). A programmable mini-computer used as the display processor. Two AN/UYK-20(V)s are installed for dual channel capability.

(3) [WRA 17] Data Signal Switching Unit SA-2164. Interconnects the Keyset Central, ACLS, NTDS, Operator Consoles, CP-1319, and AN/UYK-20(V) data processing sets when switching to the standby channel.

(4) [WRA 16] CMTU (Cartridge Magnetic Tape Unit) AN/USH-26(V). Provides for data storage and program loading. Interfaces with the AN/UYK-20(V) data processing sets. It is a self-contained tape storage system consisting of tape drives, power supplies, and a built-in maintenance test panel.

c. [WRA 19] Indicator Control Group OD-146 (5 used in CATCC-DAIR). A modified AN/TPX-42A(V) 5 OD-58/T Indicator Group with the following additions:

(1) Keyboard Controller KY-844. Accepts user inputs from a "Human Engineered" keyboard or a joystick style analog positioner and formats them for the AN/UYK-20(V) data processing sets.

(2) Indicator Control C-10330. Provides for selection of interrogation modes, visual system status indication, and display of symbology and alphanumerics. Audio and visual alarms are provided for detected emergency, lost communication, and hijack beacon returns.

(4) Indicator Set Control C-10329 (One only, placed on the console designated as the Supervisor's Console). Provides for range selection of radar and gives visual indication of the type of radar in use, alarm conditions, and channel in use.

(5) Interrogator Set AN/UPX-23 or AN/UPX-27. Challenges Mark XII IFF/SIF (Identification Friend or Foe/Selective Identification Feature) transponder sets and re-structures the replies into video signals for decoders and indicators.

d. Ancillary Equipment

(1) [WRA 18] Alphanumeric Digital Display (ADD) AN/USQ-69. A computer terminal located in the equipment spaces (near the TDP) to assist technicians in maintenance actions.

SECTION III - SPECIFICATIONS

The specification for the AN/TPX-42A(V) 8 is ELEX-I-198 dated 21 October 1974. The following specification requirements were taken from this document.

3-1 RELIABILITY

CATCC-DAIR is specified to have a greater than 700 hour equipment MTBF (Theta₀ as defined by MIL-STD-781) per paragraph 3.5.11.1 of ELEX-I-198.

3-2 MAINTAINABILITY

CATCC-DAIR is specified to have an average repair time of not more than 0.75 hours and shall have a maximum repair time not greater than 1.5 hours at the 90% confidence limit per paragraph 3.5.12.1 of ELEX-I-198. The AN/UYK-20(V) is maintained by replacement of printed circuit cards,

most of which are throw-aways (the memory arrays being an exception). The TDP computer has its own diagnostic routines to aid fault isolation. The remainder of the system is maintained by piece-part replacement on-site. Since the users have access to a sophisticated electronics repair shop on board, no intermediate level or depot level maintenance is defined.

SECTION IV - PROBLEMS

4-1 ADDITIONAL HARDWARE PROBLEMS

An operational problem has been identified concerning the modified OD-58 console. Strong negative comment has been received from the Fleet about the "Human Engineered" keyboard used. This keyboard starts with "A" in the upper left corner and proceeds across in "ABC" order. The keys are so placed that touch typing is impossible. Whereas any teletype machine or typewriter can serve as a training aid for a typewriter style keyboard (in fact, many people can already touch type), the CATCC DAIR operators can practice only on a system keyboard.

There is also the safety aspect to be considered. The Federal Aviation Administration has standardized on the "ABC" style keyboards for use in civilian air traffic control centers. The situation there bears little resemblance to the operational profile of a Fleet carrier air traffic control center (CATCC). For one thing, civilians do not have to deal with hostile intruders into their air space. For another, civilian air traffic is required to have both an alternate destination and sufficient fuel on board to get there. CATCC traffic has no alternative to carrier landing except ditching at sea. Plus, CATCC aircraft may arrive back from a mission with battle damage and be very low on fuel. These factors make it mandatory that the human-machine interface on CATCC DAIR be as natural, rapid and error free as possible. Fleet users feel the "ABC" style keyboard obstructs this rapid interchange because operators must "hunt and peck" to use it.

A related problem outside the FRAP study scope is reported here without comment or recommendation: Several reports have been received from Fleet users concerning the intercom system used with CATCC DAIR. The additional coordination necessary to compensate for the interim software's problems reportedly has overloaded the intercom system. One report also observed that the system did not withstand shipboard wear and tear well.

4-2 SOFTWARE PROBLEMS

CATCC DAIR has been roundly criticized for its software problems. Practically everything new in the AN/TPX-42A(V)8 is software or software related (like the AN/UYK-20(V)) so software problems should have been expected. To be sure, the Fleet did not like the marginally acceptable interim software. It is an unpleasant fact of life that, at this stage in the software art, a hardware design is more likely to shakedown and work correctly quicker than a software design of similar complexity. After comparison with similar software efforts, one must conclude that CATCC DAIR's software development is notable neither for its success

nor its lack of success. In short, it reflects the common industrial experience with software.

This is not to indicate that such experiences are not frustrating, costly and thoroughly unpleasant. Both Industry and the Department of Defense (DOD) are painfully aware of the cost of software problems in terms of dollars lost and schedules slipped. Even with the contractual muscle of DOD and a three billion dollar yearly volume, DOD has not succeeded in lowering the average error rate for delivered and tested software below one error in every 300 statements. In other words, a computer running unlooped code would run less than one second without encountering a mistake.

The situation is so serious that both DOD and Industrial software developers are actively seeking solutions. DOD has announced a "Software Quality Initiative" to be launched this summer from the Under Secretary of Defense level. Both Industry and DOD are preparing to alter the way the software art is practiced in America.

SECTION V - CORRECTIVE ACTIONS

5-1 HARDWARE CORRECTIVE ACTIONS

It is recommended that the "Human Engineered" keyboard used on CATCC DAIR be replaced by a standard typewriter or teletype style keyboard. The joystick function has been successfully replaced in many microcomputer applications by the arrowed keys on a standard ASCII keyboard. However, Fleet comments on the joystick have been mixed and retaining it may have some merit.

5-2 SOFTWARE CORRECTIVE ACTIONS

Followup discussions with the USS KITTY HAWK indicate that effective solutions to CATCC DAIR's software problems are being found. It is reported that these are being integrated into the Release IV software package, which should solve most Release III problems.

It is recommended that consideration be given to converting the AN/UYK-20(V) to run Pascal, either by obtaining a Pascal compiler or altering the microprogramming or both. It is further recommended that the feasibility of converting CATCC DAIR software to Pascal be investigated. Published industrial cost comparisons indicate that the cost savings in maintainability will be significant. Further, a DOD wide shift to Pascal appears to be certain. Being among the first to shift to Pascal could well counter some of the criticism leveled at this developmental effort.

It is noted that AIL has enlisted the aid of Boeing Computer Services in the CATCC DAIR effort. Boeing is a licensee of UCSD Pascal. It is likely that Pascal is being used in developing Release IV and source code in that language may be obtainable via a contractual modification at modest cost. In any case, Sperry Univac has also shifted its minicomputer operations to Pascal as a cost control measure. It is likely that their inhouse support tools for the AN/UYK-20(V) will be

likewise converted to Pascal and that a Pascal compiler for the AN/UYK-20(V) already exists at Sperry.


It is recommended that NAVELEX assume the initiative in the creation of a software problem reporting system comparable to that already in existence for hardware. It is probable that the most effective way to do this would be as an extension of the existing 3-M system. Since NAVELEX has a vital need for software problem information, an active role in creating the mechanism to obtain that information does not seem inappropriate.

SECTION VI - EQUIPMENT RELIABILITY MODEL

System reliability is defined as the probability of performing a specified function or mission under specified conditions for a specified time. Reliability models are word statements or block diagrams which represent the requirements for mission success. The FRAP equipment models are used to determine the achieved operational reliability and to assess the effect of ECPs and other corrective action upon system reliability. Maintenance Action Reports are compared against the model to determine if a reported failure results in a system failure, or if not a failure, then the degree of system degradation. In addition, the model is used in determining logistic support requirements.

Maintenance of Naval shipboard equipment is accomplished by replacement or repair of components at Organizational (O), Intermediate (I), or Depot (D) repair levels. Ships Maintenance and Material Management (3-M) normally collects organizational level repair data but not intermediate or depot level repair data. Using 3-M field data requires that the lowest components of the model be the lowest level reported by 3-M, i.e., the O-level replaceable component. This O-level component can be a piece-part, printed circuit board, major assembly, or whatever is planned for the O-level maintenance concept.

The CATCC-DAIR system reliability model is represented in Figure 6-1a through Figure 6-1c. The model illustrates the redundant features of the system and the alternate modes of operation.



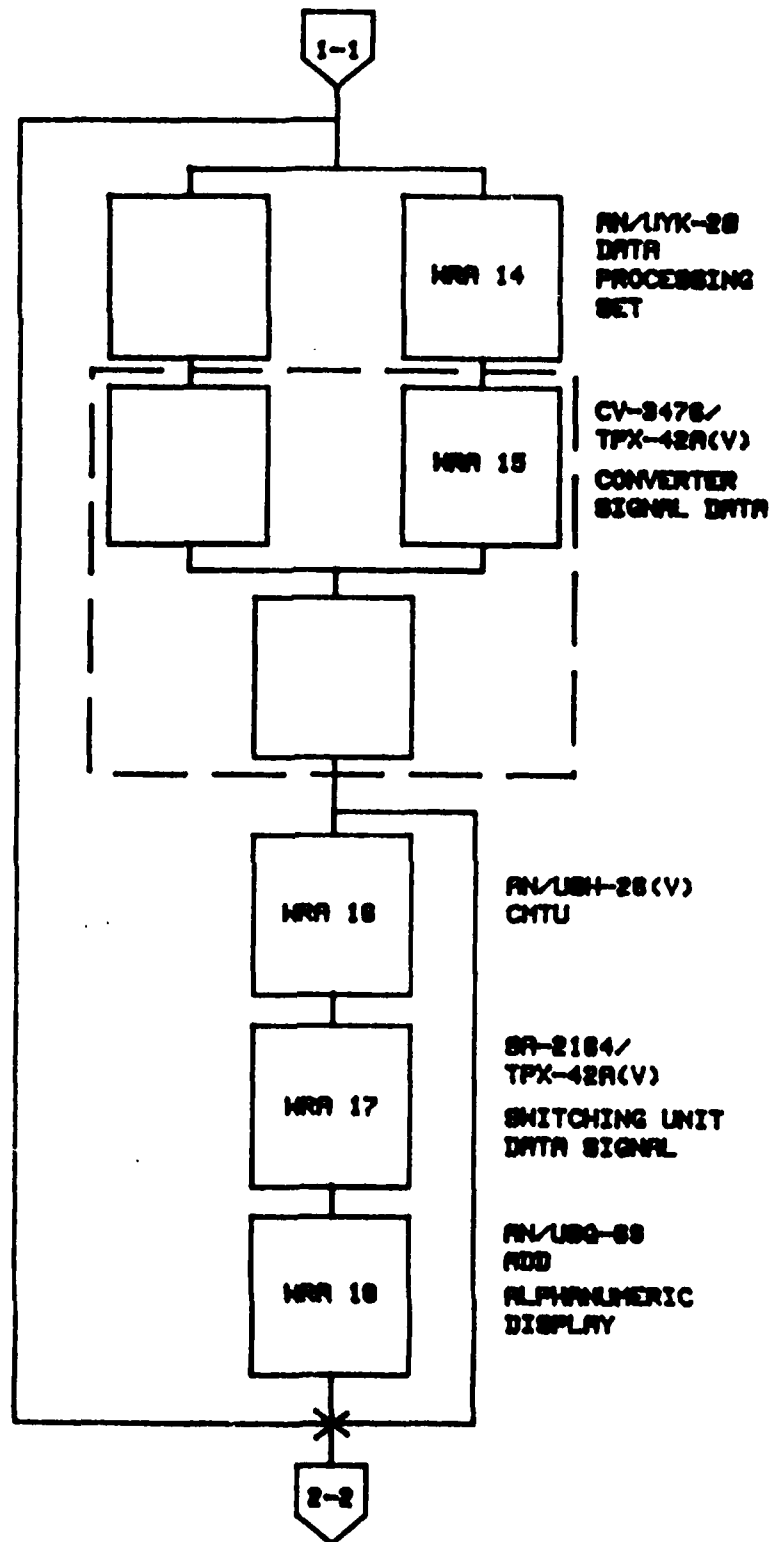


FIGURE 6-1b
CATCC-DAIR SYSTEM Block Diagram (Continued)

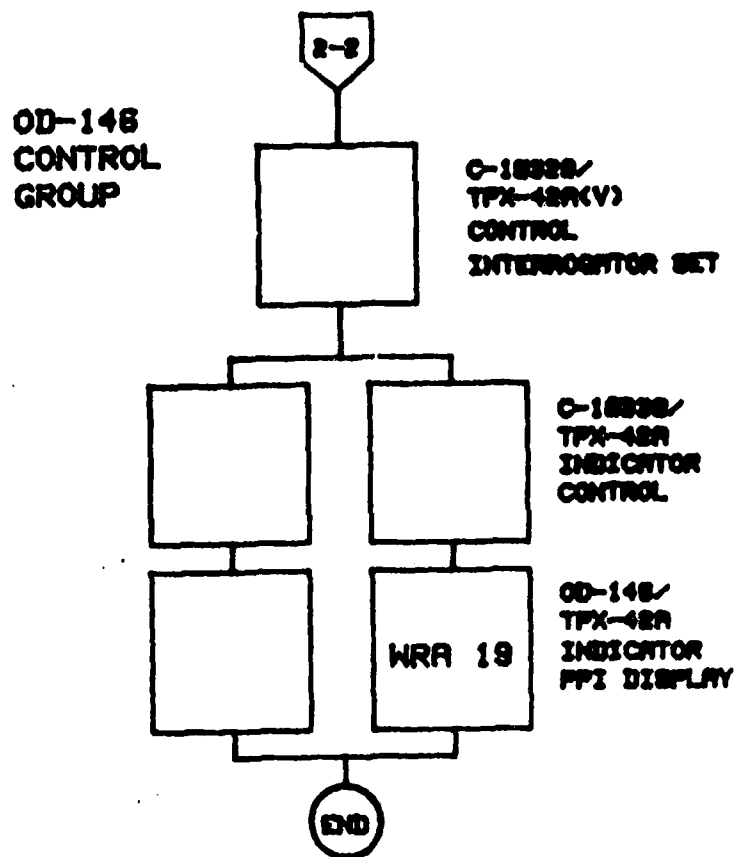


FIGURE 8-1c
CATCC-DAIR SYSTEM Block Diagram (Continued)

SECTION VII - ANALYSIS

7-1 SOFTWARE ANALYSIS

No mechanism exists for the collection of software reliability information. The existing 2 Kilo mechanism does not cover software and despite specifically asking for software problem data, no 2K forms on software were received. This necessitated visits by FRAP personnel to Fleet platforms during the study period, something FRAP would like to avoid since it compromises FRAP's commitment to minimal intrusion into Fleet operations. Even so, the information obtained is subjective in nature and does not lend itself to numerical analysis.

Only a few general observations are possible. At the beginning of the FRAP study, software problems were very severe. As the study progressed, the situation improved. The last contact with the USS KITTYHAWK was in marked contrast to earlier discussions. It was clear that they were pleased with the capabilities CATCC DAIR gave them and that they were eagerly awaiting the delivery of the "Vector Map" upgrade to the TDP software package.

7-2 HARDWARE ANALYSIS

The data analysis for CATCC-DAIR is presented in 4 sub-sections, follows:

- (1) All Data. All of the collected data from the participating platform is selected for analysis. The reliability analysis is conducted on all failures or maintenance actions without consideration of system capability loss. No maintainability or availability analysis is performed.
- (2) All Data, except USS INDEPENDENCE. All of the collected data from the USS RANGER and the USS KITTYHAWK is selected for analysis. Maintainability analysis is performed using active repair time as reported on the 2K form.
- (3) Equipment Analysis. Data from the USS RANGER and the USS KITTYHAWK is selected to meet the condition of a hardware or a software failure. The reliability analysis is conducted on this data set. The maintainability analysis uses repair time as reported on the 2K form. The availability analysis uses equipment reliability and repair time in hours.
- (4) Parts Replacement. Data from the USS RANGER and the USS KITTYHAWK is selected to meet the condition of requiring a parts replacement. The reliability analysis is performed on this data set. A maintainability analysis is performed using ships force repair man-hours from the 2K form.

SUB-SECTION (1)

CATCC-DAIR

ALL DATA

FLEET RELIABILITY ASSESSMENT DATA											
SYSTEM	SHIPNAME	DATE	ETM	FAILURE TYPE	OPERATE	FAILURE TIME	DUTY	WRA	OL1	OL2	OL3
CATCC DAIR	INDEPENDENCE	8206	1458.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	INDEPENDENCE	8303	3840.	CENSORED	2382.	2382.	1.023	0	0	0	0
CATCC DAIR	INDEPENDENCE	8334	3858.	CENSORED	2400.	2400.	.781	0	0	0	0
CATCC DAIR	INDEPENDENCE	9001	3902.	CENSORED	2444.	2444.	.636	0	0	0	0
CATCC DAIR	INDEPENDENCE	9031	3902.	CENSORED	2444.	2444.	.536	0	0	0	0
CATCC DAIR	INDEPENDENCE	9062	4366.	CENSORED	2908.	2908.	.548	0	0	0	0
CATCC DAIR	INDEPENDENCE	9091	4778.	FAILURE	3320.	3320.	.553	0	0	0	0
NO INITIAL RECORD-FIRST RECORD USED											
CATCC DAIR	KITTY HAWK	8288	2650.	FAILURE	0.	0.	0.000	14	39	0	0
CATCC DAIR	KITTY HAWK	8321	2658.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	KITTY HAWK	8321	2686.	FAILURE	28.	28.	0.000	19	0	0	0
CATCC DAIR	KITTY HAWK	8321	2688.	FAILURE	30.	2.	0.000	11	99	0	0
CATCC DAIR	KITTY HAWK	8348	2794.	FAILURE	136.	106.	.210	18	3	0	0
CATCC DAIR	KITTY HAWK	9010	3104.	FAILURE	446.	310.	.344	0	0	0	0
CATCC DAIR	KITTY HAWK	9011	3125.	FAILURE	467.	21.	.354	0	0	0	0
CATCC DAIR	KITTY HAWK	9029	3293.	FAILURE	635.	168.	.362	16	99	0	0
CATCC DAIR	KITTY HAWK	9135	4085.	FINAL	1427.	792.	.332	0	0	0	0
CATCC DAIR	RANGER	8164	1904.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	RANGER	8256	2455.	CENSORED	551.	551.	.250	0	0	0	0
CATCC DAIR	RANGER	8278	2702.	CENSORED	798.	798.	.292	0	0	0	0
CATCC DAIR	RANGER	8307	3386.	FAILURE	1482.	1482.	.432	19	2	0	0
CATCC DAIR	RANGER	8334	4163.	CENSORED	2259.	777.	.554	0	0	0	0
CATCC DAIR	RANGER	8363	4519.	CENSORED	2615.	1133.	.548	0	0	0	0
CATCC DAIR	RANGER	9049	5035.	FAILURE	3131.	1649.	.522	19	9	0	0
CATCC DAIR	RANGER	9058	5230.	FAILURE	3326.	195.	.535	19	16	0	0
CATCC DAIR	RANGER	9074	5514.	FAILURE	3610.	284.	.547	19	2	0	0
CATCC DAIR	RANGER	9080	5514.	FAILURE	3610.	0.	.535	19	8	0	0
CATCC DAIR	RANGER	9104	5550.	FAILURE	3646.	36.	.498	19	2	0	0

RELIABILITY

CATCC DAIRSYSTEM LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPB	EXPONENTIAL	WEIBULL
100.	.0	1.		14.	.067	.000	.004
100.	2.0	1.		13.	.133	.003	.106
100.	21.0	1.		12.	.200	.012	.263
100.	28.0	1.		11.	.267	.042	.291
98.	36.0	1.		10.	.333	.054	.318
100.	106.0	1.		9.	.400	.151	.455
100.	148.0	1.		8.	.467	.229	.522
100.	195.0	1.		7.	.533	.261	.544
100.	284.0	1.		6.	.600	.356	.602
100.	310.0	1.		5.	.667	.381	.616
	792.0		1.				
100.	1482.0	1.		3.	.750	.899	.844
100.	1649.0	1.		2.	.833	.922	.857
100.	3320.0	1.		1.	.917	.994	.927

EQUIPMENT OPERATING HOURS (O.M.) = 8393.0 CALENDAR HOURS (C.H.) = 17616.0 DUTY CYCLE (O.H./C.H.) = .476

NUMBER OF FAILURES = 13. OBSERVED FAILURE RATE/O.M. = .15489E-02

ORATIO OF 4.461 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .837230E-01 BETA = .424563E+00

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 979.243. EST. MEDIAN = 150.000. 90 PER CENT LCL FOR MEAN = 0.000. 90 PER CENT UCL FOR MEAN = 2034.941

90 PER CENT LCL FOR BETA = .345781E+00 90 PER CENT UCL FOR BETA = .503345E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

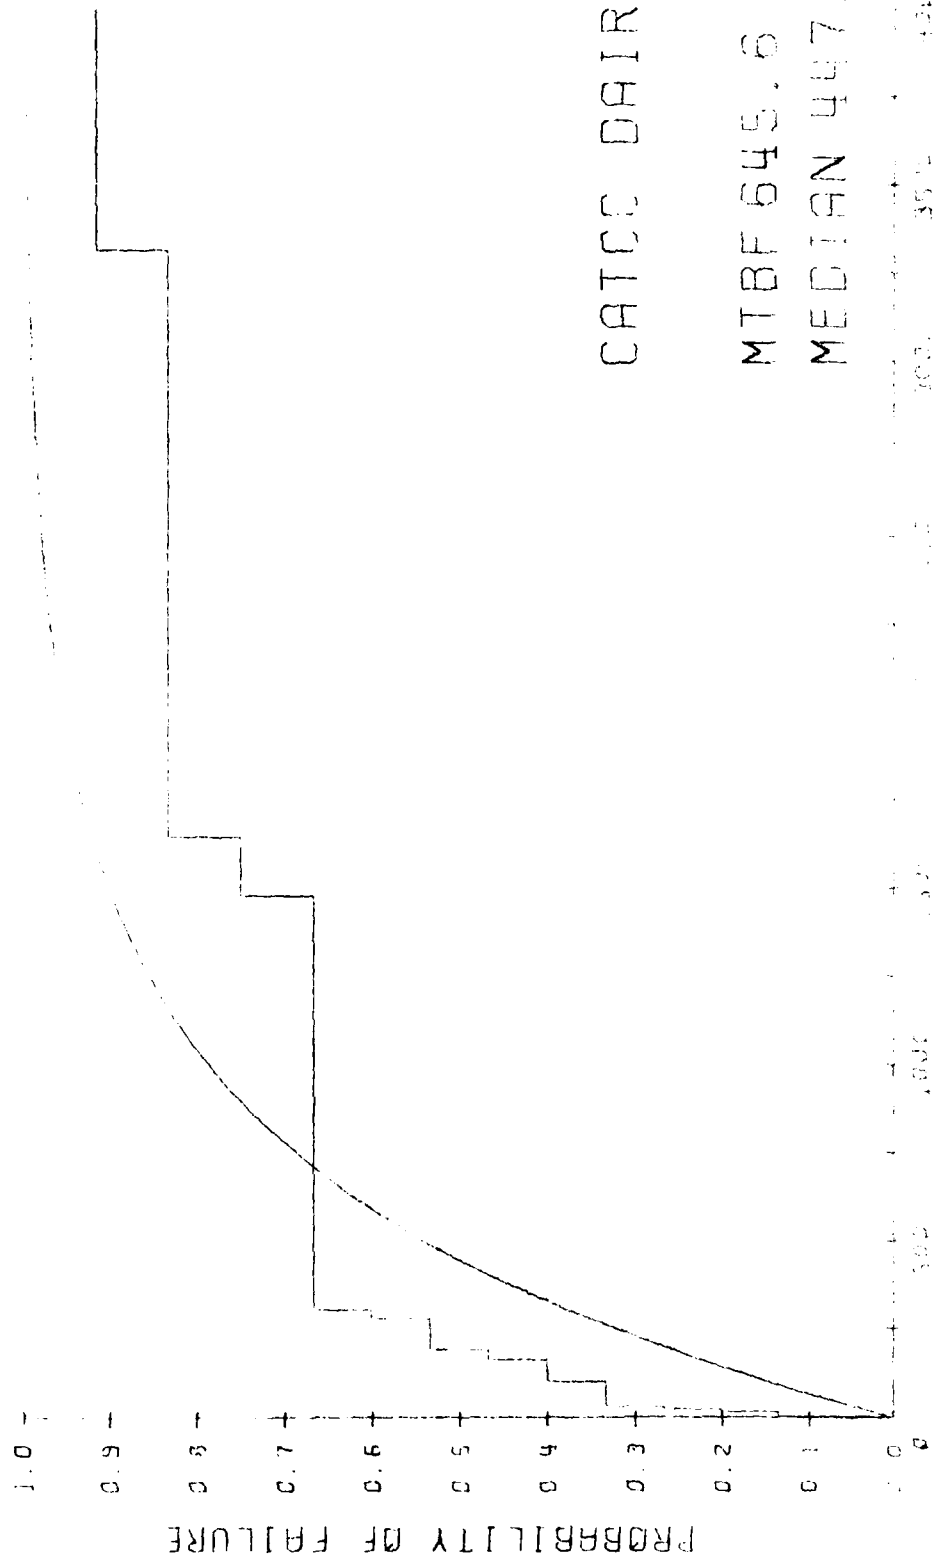


CATCC DAIR

MTBF 645.6

MEDIAN 447.5

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

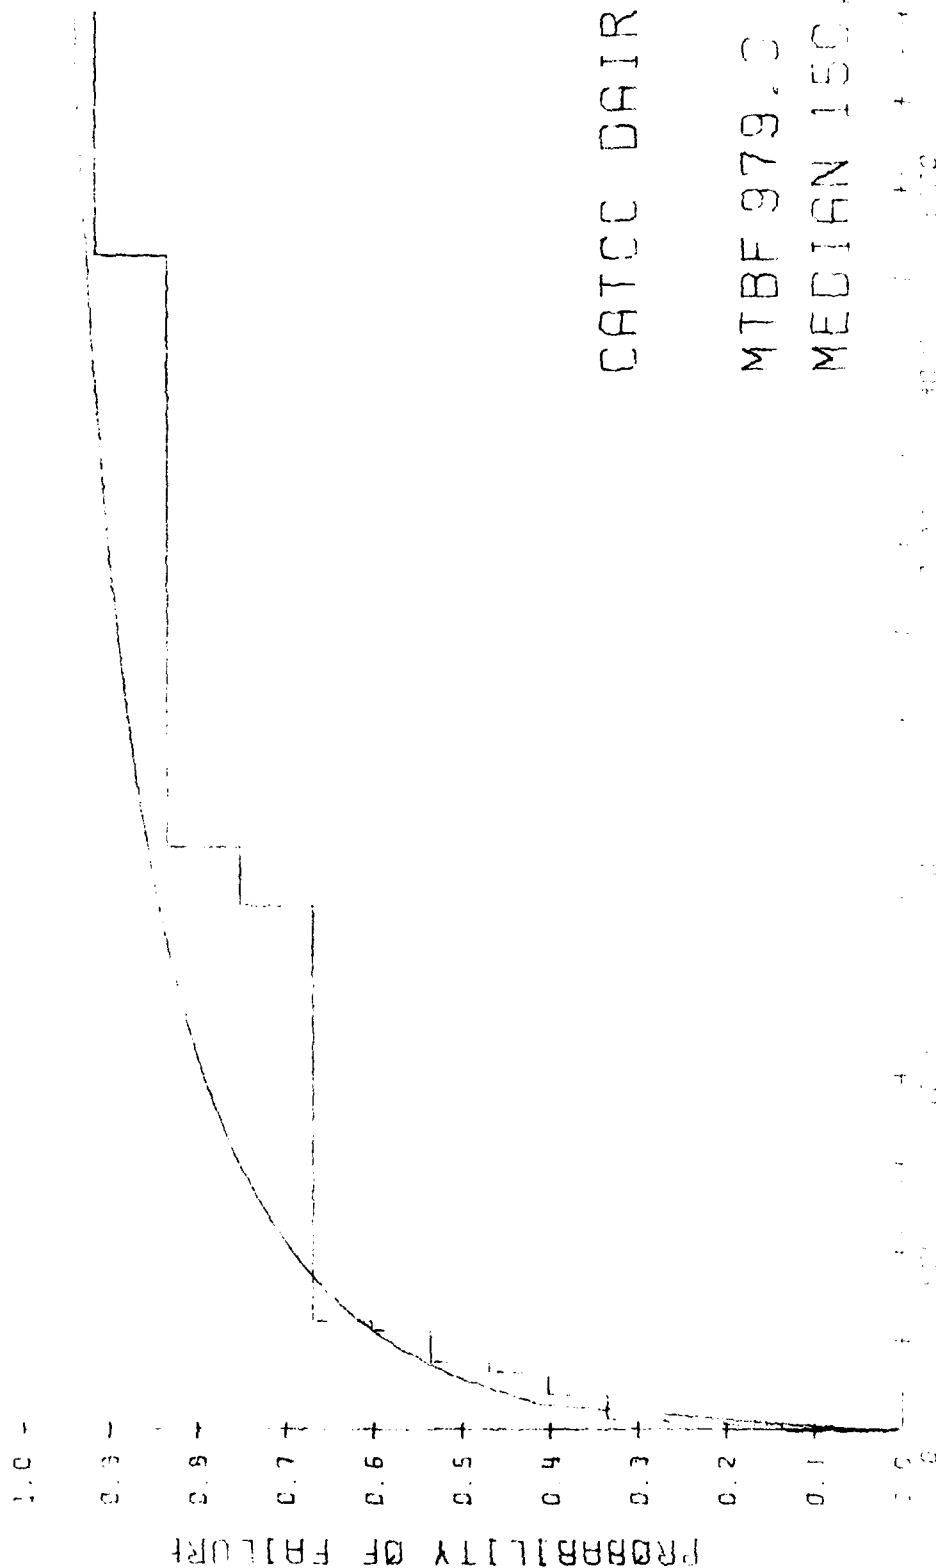

RELIABILITY

CATCC DAIR WRA II LEVEL

REMAINING
SYS. CAP.
100.

TIME TO FAIL
30.0
1397.0
3320.0
3646.0

NO.
FAILURES
1.

NO.
CENSORED

1.
1.
1.

EQUIPMENT OPERATING HOURS (O.H.) = 8393.0 CALENDAR HOURS(C.H.) = 17616.0 DUTY CYCLE (O.H./C.H.) = .476

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .11915E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED
FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 8393.000. EST. MEDIAN = 5817.584. 90 PER CENT LCL FOR MEAN = 2157.7. 90 PER CENT UCL FOR MEAN = 79660.213
90 PERCENT UCL 79660.21 IS GREATER THAN 11655.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 16 LEVEL

REMAINING
SYS. CAP.
100.

TIME TO FAIL
635.0
792.0
3320.0
3646.0

NO.
FAILURES
1.
NO.
CENSORED
1.
1.
1.

EQUIPMENT OPERATING HOURS (O.H.) = 8393.0 CALENDAR HOURS (C.H.) = 17616.0 DUTY CYCLE (O.H./C.H.) = .476

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .11915E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED
FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 8393.000. EST. MEDIAN = 5817.584, 90 PER CENT LCL FOR MEAN = 2157.7. 90 PER CENT UCL FOR MEAN = 79660.213
90 PERCENT UCL 79660.21 IS GREATER THAN 2880.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 18 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED
100.	136.0	1.	
	1291.0		1.
	3320.0		1.
	3646.0		1.

EQUIPMENT OPERATING HOURS (O.H.) = 8393.0 CALENDAR HOURS(C.H.) = 17616.0 DUTY CYCLE (O.H./C.H.) = .476

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .11915E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 8393.000, EST. MEDIAN = 5817.584, 90 PER CENT LCL FOR MEAN = 2157.7, 90 PER CENT UCL FOR MEAN = 79660.213
 90 PERCENT UCL 79660.21 IS GREATER THAN 5000.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 19 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPB	EXPONENTIAL	WEIBULL
100.	.0	1.		9.	.100	.000	.012
100.	28.0	1.		8.	.200	.023	.276
98.	36.0	1.		7.	.300	.030	.295
100.	195.0	1.		6.	.400	.150	.454
100.	284.0	1.		5.	.500	.211	.495
	1399.0		1.				
100.	1482.0	1.		3.	.625	.709	.688
100.	1649.0	1.		2.	.750	.747	.701
	3320.0		1.				

EQUIPMENT OPERATING HOURS (O.H.) = 8393.0 CALENDAR HOURS(C.H.) =, 17616.0 DUTY CYCLE (O.H./C.H.) = .476

NUMBER OF FAILURES = 7. OBSERVED FAILURE RATE/O.H. = .83403E-03


ORATIO OF 4.641 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL

THE WEIBULL PARAMETERS ARE ALPHA = .109899E+00 BETA = .323382E+00

FOR THE ASSUMED DISTRIBUTION


EST. MEAN = 6231.390, EST. MEDIAN = 326.471. 90 PER CENT LCL FOR MEAN = 0.000, 90 PER CENT UCL FOR MEAN = 22319.055
 90 PER CENT LCL FOR BETA = .211893E+00 90 PER CENT UCL FOR BETA = .434872E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

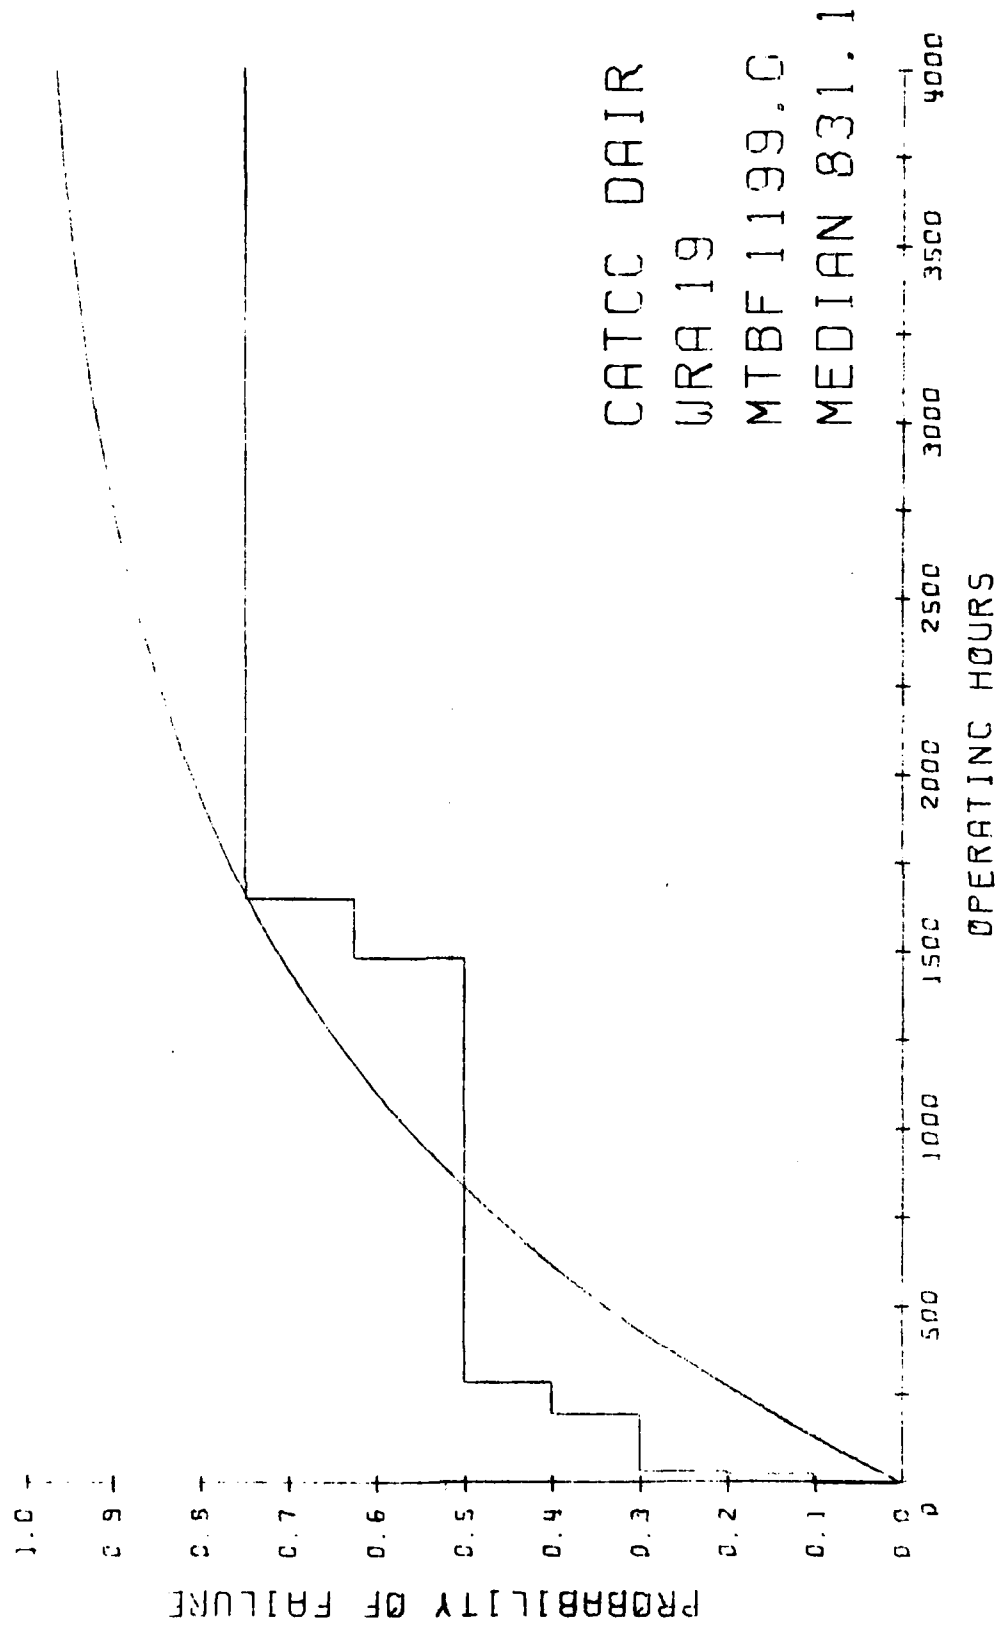

CATCC DAIR
 WRA 19
 MTBF 1199.0
 MEDIAN 831.1

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

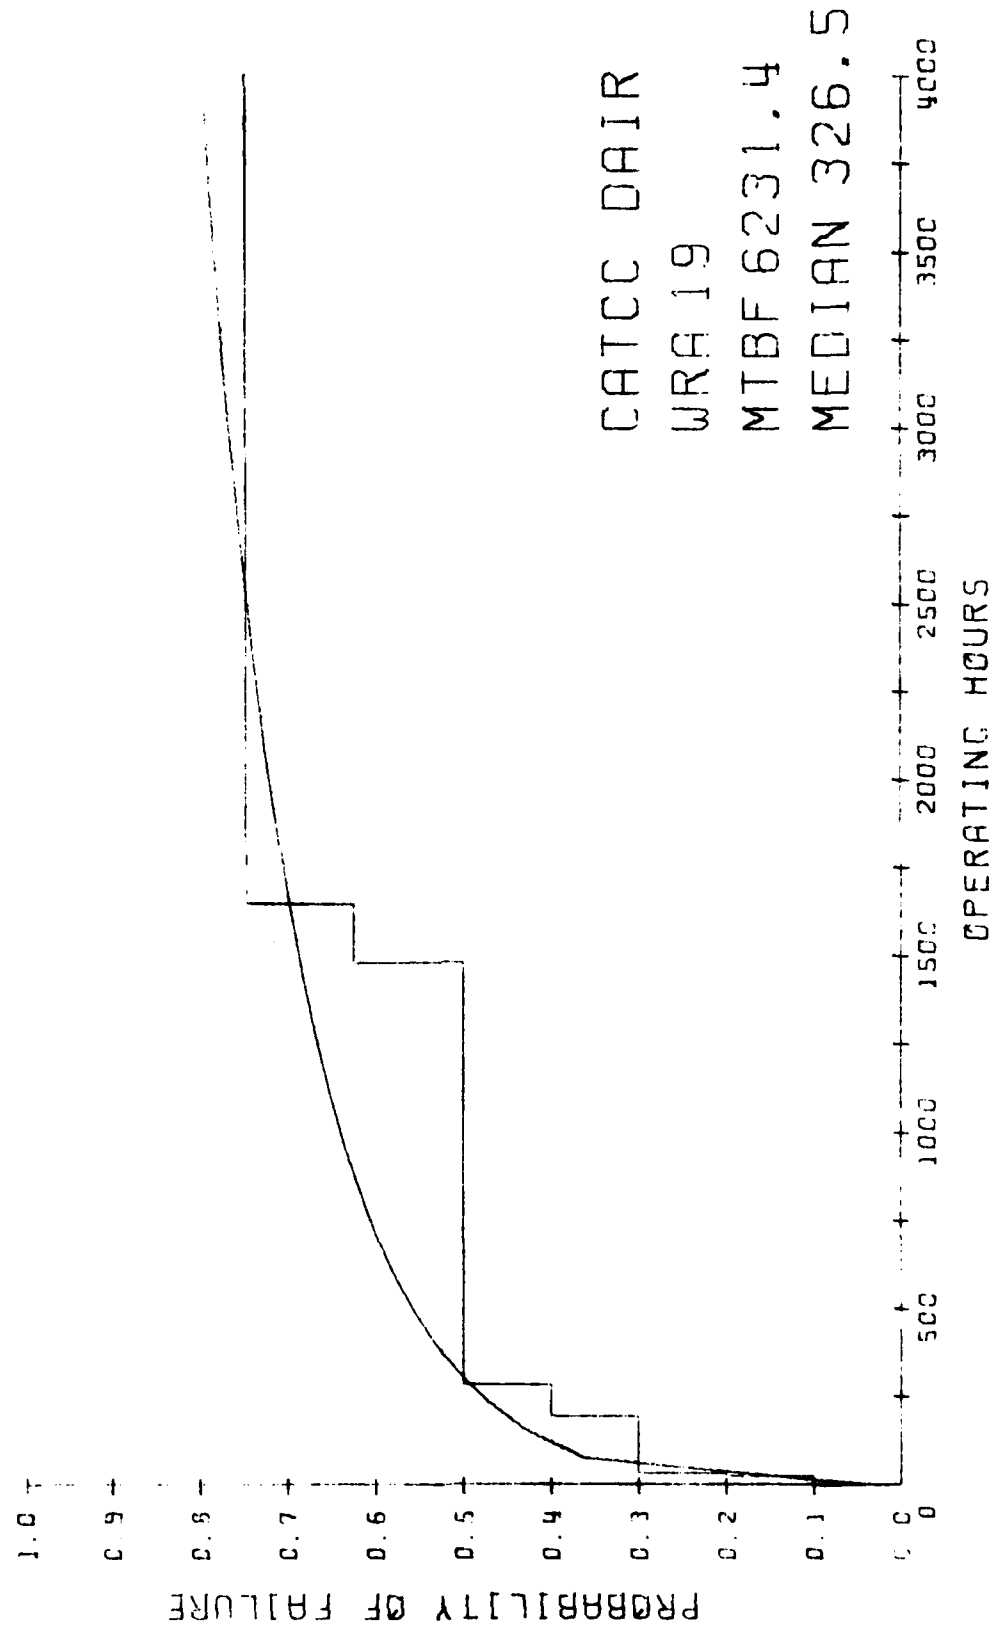

CATCC DAIR
 WRA 19
 MTBF 6231.4
 MEDIAN 326.5

R E L I A B I L I T Y

CATCC DAIR O-LEVEL SUMMARY

WRA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER FAILURES	LOWER 90 CONF LIM	MEAN	UPPER 90 CONF LIM	SPEC MTBF	OBSERVED FAILURE TIMES LOW	HIGH	RELIAB PROBLEM
11	99		1.	2157.74	8393.00	79660.21	1000000.00	30.00	30.00	YES
16	99		1.	2157.74	8393.00	79660.21	1000000.00	635.00	635.00	YES
18	3	CRT DRIVER ELECTRONICS	1.	2157.74	8393.00	79660.21	27769.00	136.00	136.00	NO
19	2	DEFLECTION AMPLIFIER	3.	1256.29	2797.67	7615.70	92808.00	1482.00	3646.00	YES
19	8	INTERFACE AND LOGIC	1.	2157.74	8393.00	79660.21	23702.00	3610.00	3610.00	NO
19	9	VIDEO AMPLIFIER	1.	2157.74	8393.00	79660.21	54885.00	3131.00	3131.00	NO
19	16	PANEL (RIGHT SIDE)	1.	2157.74	8393.00	79660.21	24499.00	3326.00	3326.00	NO

RELIABILITY

2K SUMMARY FOR CATCC DATA PROBLEM AREAS

WRA	O-L	O-L	O-L	WHAT HAPPENED
19	2	0	0	
19	2	0	0	
19	2	0	0	
				ANOTHER AMP FAILURE/SEE 1131/EK
				ENT REPORTED AS 55054/EK

JCN
33610E010740
33610E100780
33610E100789

SUB-SECTION (2)

CATCC-DAIR

ALL DATA

EXCEPT INDEPENDENCE

SYSTEM	SHTNAME	DATE	ETM	FLYET RELIABILITY ASSESSMENT DATA	FAILURE TYPE	OPERATE	FAILURE TIME	DUTY	MRA	OL1	OL2	OL3
CATCC DAIR	KITTY HAWK	8329	2650.	FAILURE	0.	0.	0.	0.000	14	39	0	0
CATCC DAIR	KITTY HAWK	8321	2658.	INITIAL	0.	0.	0.	0.000	0	0	0	0
CATCC DAIR	KITTY HAWK	8321	2646.	FAILURE	28.	24.	0.	0.000	19	0	0	0
CATCC DAIR	KITTY HAWK	8321	2648.	FAILURE	30.	2.	0.	0.000	11	99	0	0
CATCC DAIR	KITTY HAWK	8348	2794.	FAILURE	136.	106.	0.	0.210	18	3	0	0
CATCC DAIR	KITTY HAWK	9010	3104.	FAILURE	446.	310.	0.	0.344	0	0	0	0
CATCC DAIR	KITTY HAWK	9011	3125.	FAILURE	467.	21.	0.	0.354	0	0	0	0
CATCC DAIR	KITTY HAWK	9029	3293.	FAILURE	635.	168.	0.	0.362	16	99	0	0
CATCC DAIR	KITTY HAWK	9135	4045.	FINAL	1427.	792.	0.	0.332	0	0	0	0
CATCC DAIR	RANGER	8164	1904.	INITIAL	0.	0.	0.	0.000	0	0	0	0
CATCC DAIR	RANGER	8256	2455.	CENSORED	551.	551.	0.	0.250	0	0	0	0
CATCC DAIR	RANGER	8274	2702.	CENSORED	798.	798.	0.	0.292	0	0	0	0
CATCC DAIR	RANGER	8307	3386.	FAILURE	1482.	1482.	0.	0.432	19	2	0	0
CATCC DAIR	RANGER	8334	4163.	CENSORED	2259.	777.	0.	0.554	0	0	0	0
CATCC DAIR	RANGER	8303	4519.	CENSORED	2615.	1133.	0.	0.548	0	0	0	0
CATCC DAIR	RANGER	9049	5035.	FAILURE	3131.	1649.	0.	0.522	19	9	0	0
CATCC DAIR	RANGER	9058	5230.	FAILURE	3326.	195.	0.	0.535	19	16	0	0
CATCC DAIR	RANGER	9074	5514.	FAILURE	3610.	284.	0.	0.567	19	2	0	0
CATCC DAIR	RANGER	9040	5514.	FAILURE	3610.	0.	0.	0.535	19	8	0	0
CATCC DAIR	RANGER	9104	5550.	FAILURE	3646.	36.	0.	0.498	19	2	0	0

R E L I A B I L I T Y

CATCC DAIRSYSTEM LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPD	EXPONENTIAL	WEIBULL
100.	0	1.		13.	.071	.000	.004
100.	2.0	1.		12.	.143	.005	.115
100.	21.0	1.		11.	.214	.048	.289
100.	24.0	1.		10.	.286	.064	.320
98.	34.0	1.		9.	.357	.082	.350
100.	106.0	1.		8.	.429	.222	.498
100.	148.0	1.		7.	.500	.328	.570
100.	195.0	1.		6.	.571	.370	.593
100.	244.0	1.		5.	.643	.489	.654
100.	310.0	1.		4.	.714	.520	.668
	742.0		1.				
100.	1432.0	1.		2.	.810	.970	.887
100.	1649.0	1.		1.	.905	.980	.898

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 12. OBSERVED FAILURE RATE/O.H. = .23655E-02

ORATIO OF 3.793 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .902120E-01 BETA = .436198E+00

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 461.361. EST. MEDIAN = 110.870. 90 PER CENT LCL FOR MEAN = 0.000. 90 PER CENT UCL FOR MEAN = 1377.394

90 PER CENT LCL FOR MFTA = .348075E+00 90 PER CENT UCL FOR BETA = .524321E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

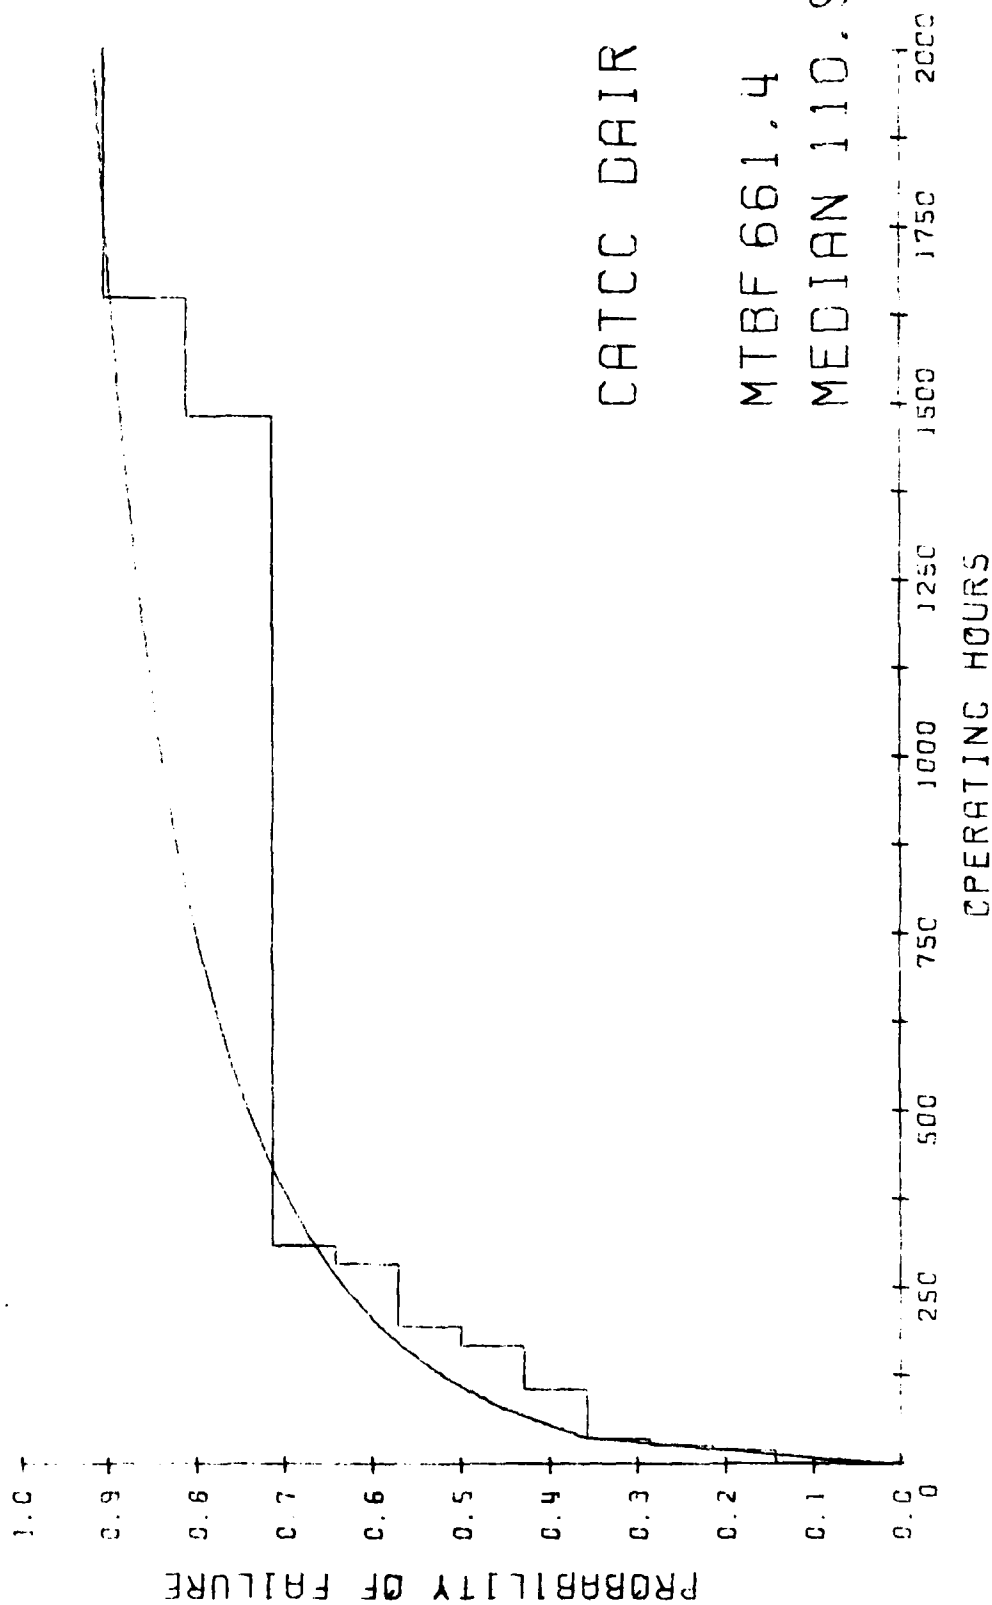


CATCC DAIR

MTBF 661.4

MEDIAN 110.9

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

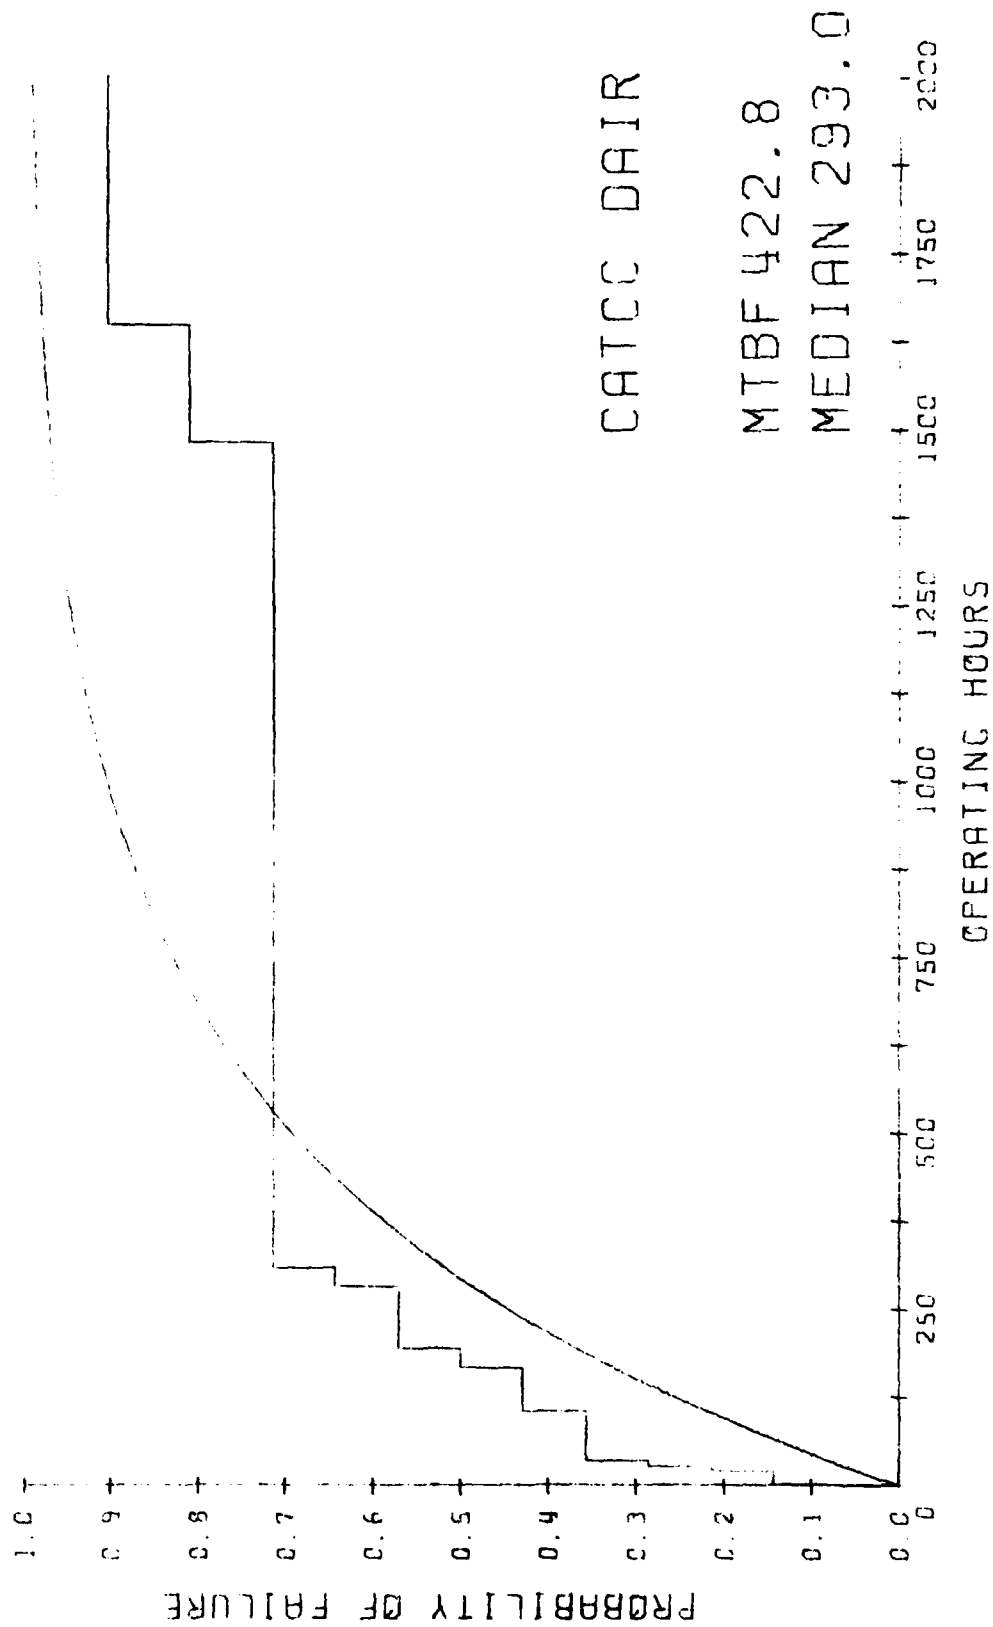

RELIABILITY

CATCC JAIR WPA 11 LEVEL

REMAINING
SYS. CAP. 100.

TIME TO FAIL
30.0
1397.0
4225.0

NO.
FAILURES 1.
NO.
CENSORED 1.
1.

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED
FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000. EST. MEDIAN = 3516.336. 90 PER CENT LCL FOR MEAN = 1304.2. 90 PER CENT UCL FOR MEAN = 48149.203
90 PERCENT UCL 48149.20 IS GREATER THAN 11655.00 HOURS. THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

R E L I A B I L I T Y

CATCC JATW WRA 14 LEVEL

REMAINING	TIME TO FTH	NO.	NO.
SYS. CAP.	FAILURES	FAILURES	CENSORED
100.	435.0	1.	1.
	702.0		1.
	352.0		1.

EQUIPMENT OPERATING HOURS (O.M.H.) = 5073.0 CALENDAR HOURS(C.M.H.) = 11614.0 DUTY CYCLE (O.M./C.M.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.M.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000. EST. MEDIAN = 3515.336. 90 PER CENT LCL FOR MEAN = 1304.2. 90 PER CENT UCL FOR MEAN = 48149.203

90 PERCENT UCL 48149.20 IS GREATER THAN 2480.00 HOURS. THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAILY WRA 1A LEVEL

REMAINING	TIME TO FURTHER	NO.	NO.
SYS. CAP.	FAILURES	REASONED	
100.	1.	1.	
	1291.0	1.	
	3-000		

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION:

EST. MEAN = 5073.000. EST. MEDIAN = 3416.330. 90 PER CENT LCL FOR MEAN = 1304.2. 90 PER CENT UCL FOR MEAN = 48149.203
 90 PERCENT UCL 48149.20 IS GREATER THAN 5000.00 HOURS. THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

W E I B U L L I T Y

CATCC JAWP WRA 14 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPD	EXPONENTIAL	WEIBULL
100.	0	1.		9.	.111	.000	.009
100.	24.0	1.		7.	.222	.038	.309
94.	36.0	1.		6.	.333	.048	.333
100.	135.0	1.		5.	.444	.236	.523
100.	244.0	1.		4.	.556	.324	.572
	1335.0		1.				
100.	1442.0	1.		2.	.704	.871	.784
100.	1644.0	1.		1.	.852	.897	.797

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) = 11416.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 7. OBSERVED FAILURE RATE/O.H. = .13794E-02


RATIO OF 3.843 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL

THE WEIBULL PARAMETERS ARE ALPHA = .112102E+00 BETA = .358215E+00

FOR THE ASSUMED DISTRIBUTION


EST. MEAN = 2090.423. EST. MEDIAN = 171.429. 90 PER CENT LCL FOR MEAN = 0.000. 90 PER CENT UCL FOR MEAN = 6529.923
 90 PER CENT LCL FOR BETA = .241342E+00 90 PER CENT UCL FOR BETA = .475088E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

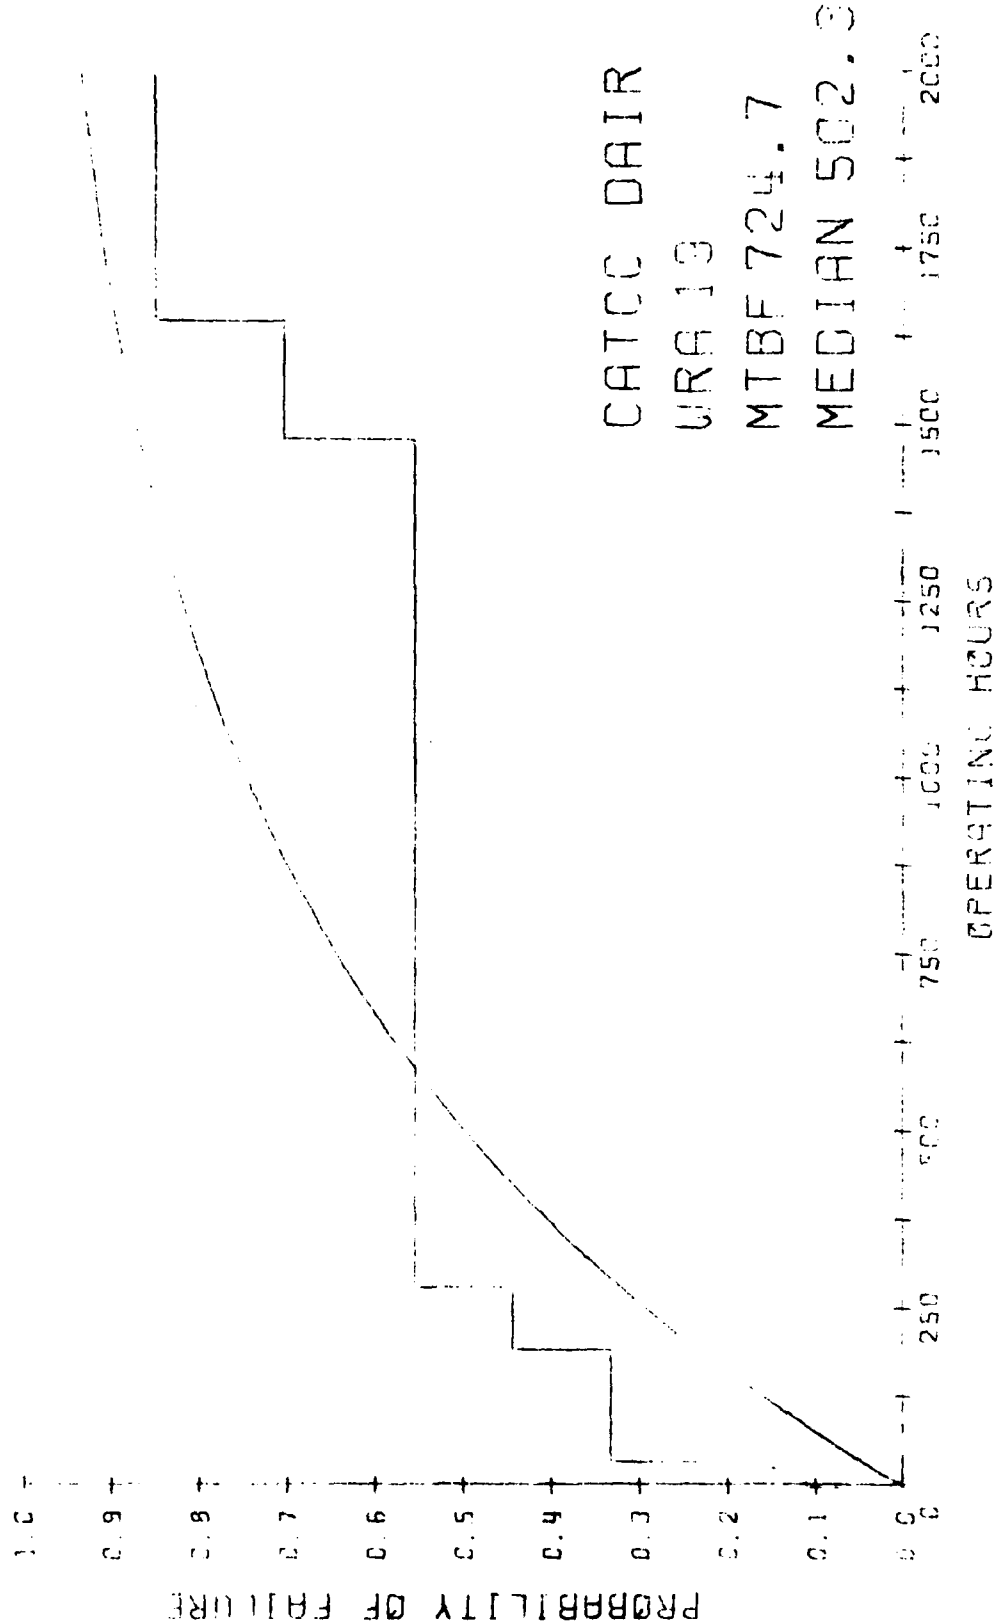

CATCC DAIR
URA 13
MTBF 724.7
MEDIAN 502.3

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

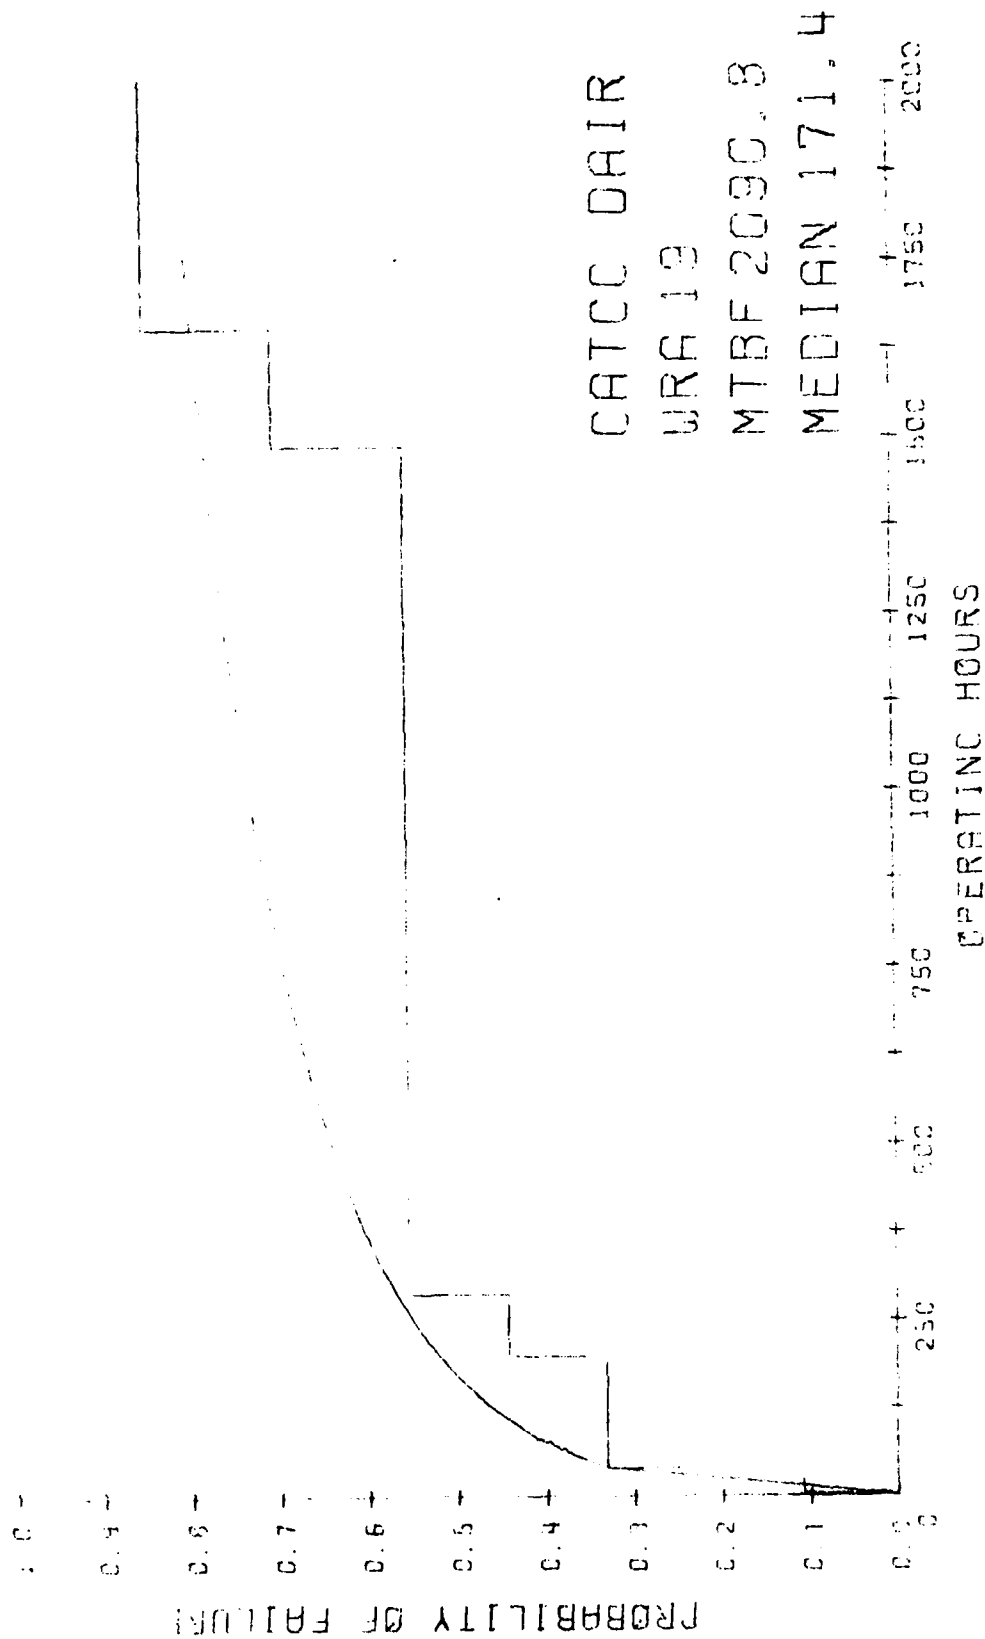

RELIABILITY

CAI CC DATA O-LEVEL SUMMARY

WPA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMREF FAILURES	LOWER 90 CONF LIM	MEAN	UPPER 90 CONF LIM	SPEC MTBF	OBSERVED FAILURE TIMES LOW	HIGH	RELIAR PROBLEM
11	99		1.	1304.21	5073.00	48149.20	1000000.00	30.00	30.00	YES
16	99		1.	1304.21	5073.00	48149.20	1000000.00	635.00	635.00	YES
18	3	CRT DRIVER ELECTRONICS	1.	1304.21	5073.00	48149.20	22769.00	136.00	136.00	NO
19	2	DEFLECTION AMPLIFIER	3.	759.34	1691.00	4603.18	92809.00	1482.00	3646.00	YES
19	8	INTERFACE AND LOGIC	1.	1304.21	5073.00	48149.20	23702.00	3610.00	3610.00	NO
19	9	VIDEO AMPLIFIER	1.	1304.21	5073.00	48149.20	54885.00	3131.00	3131.00	YES
19	16	PANEL (RIGHT SIDE)	1.	1304.21	5073.00	48149.20	24499.00	3326.00	3326.00	NO

RELIABILITY

SUMMARY FOR LATCC DATA PROBLEM AREAS

WMA	U-L	U-L	U-L	WHAT HAPPENED
19	1	0	0	
19	9	0	0	
19	2	0	0	ANOTHER AMP FAILURE/SEE 1131/EK
19	2	0	0	EMT REPORTED AS 55054/EK

FLFFT MAINTAINABILITY ASSESSMENT DATA

SYSTEM	SHIPNAME	DISCOVERED	COMPL	REPAIR TIME	DOWN TIME
CATCC DAIR	KITTY HAWK	R298	R298	0.	0.
CATCC DAIR	KITTY HAWK	R321	R321	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	R321	R321	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	R348	R348	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	R010	R010	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	R011	R026	1A.	360.
CATCC DAIR	KITTY HAWK	R020	R029	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	RANGER	R307	R314	9A.	168.
CATCC DAIR	RANGER	R049	R053	5.	96.
CATCC DAIR	RANGER	R058	R058	4.	4.
CATCC DAIR	RANGER	R074	R075	1.	24.
CATCC DAIR	RANGER	R080	R087	2.	168.
CATCC DAIR	RANGER	R104	R117	2.	312.

MAINTAINABILITY (REPAIR TIME)

CATCC DAIR SYSTEM LEVEL

REPAIR TIME.	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.125	.140	.054	.193
2.0	2.	3.0	.375	.263	.165	.282
4.0	1.	4.0	.500	.426	.199	.401
5.0	1.	5.0	.625	.483	.243	.446
16.0	1.	6.0	.750	.761	.589	.707
96.0	1.	7.0	.875	.969	.995	.977

TOTAL REPAIR HOURS = 126.0 NUMBER OF REPAIRS = 7. OBSERVED REPAIR RATE/HR = .5556F-01

DISTRIBUTION DETERMINATION

MEAN OF LN#S = 1.47 STD DEV OF LN#S = 1.55


K-S CRITICAL VALUE (.10. 7.) = .276 MAX DIFF CALC = .219 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

FST MEAN = 18.00 FST MEDIAN = 5.33 90 PER CENT LCL ON MEDIAN = 2.30 90 PER CENT UCL ON MEDIAN = 12.39

SPECIFIED MTTR = 2.00 HOURS LOWER CONF LIM 2.30 IS GREATER THAN MTTR, THUS A MAINTAINABILITY PROBLEM EXISTS

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

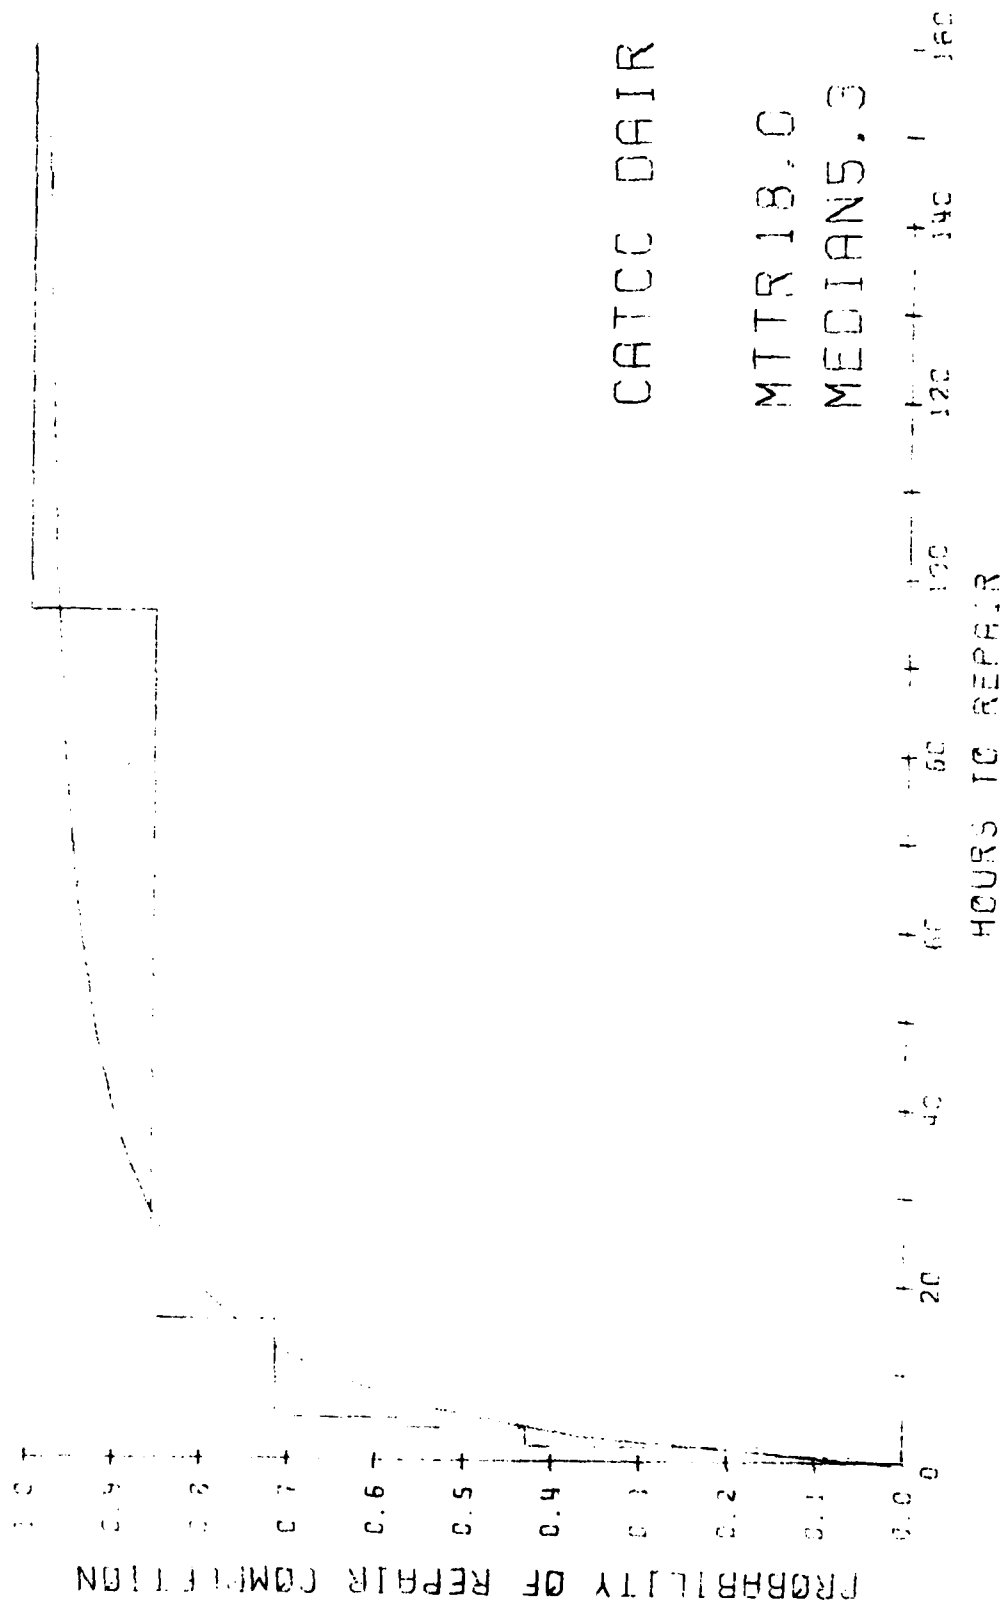

MAINTAINABILITY (DOWN TIME)

CATCC DATA SYSTEM LEVEL

DOWN TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
4.0	1.	1.0	.125	.030	.024	.025
24.0	1.	2.0	.250	.219	.138	.139
44.0	1.	3.0	.375	.533	.448	.449
164.0	2.	5.0	.625	.666	.646	.647
312.0	1.	6.0	.750	.792	.855	.854
360.0	1.	7.0	.875	.816	.892	.892

TOTAL DOWN TIME (TOT) = 1122.0 NUMBER OF REPAIRS (NR) = 7. OBSERVED DOWN TIME/REPAIR (TDT/NR) = 161.71

DISTRIBUTION DETERMINATION


MEAN OF LN#S = 4.43 STD DEV OF LN#S = 1.62

K-S CRITICAL VALUE (.10, 7.) = .276 MAX DIFF CALC = .291 IS GREATER THAN THE CRITICAL VALUE
THEREFORE THE LOGNORMAL DISTRIBUTION CANNOT BE ASSUMED


RATIO OF 1.340 DOES NOT EXCEED THE CRITICAL VALUE FOR TEST OF EXPONENTIAL
THEREFORE THE EXPONENTIAL DISTRIBUTION IS ASSUMED

EST MEAN = 161.71 EST MEDIAN = 112.09 90 PER CENT LCL ON MEAN = 107.48 90 PER CENT UCL ON MEAN = 290.65

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL LOGNORMAL PROBABILITY DISTRIBUTION FOR DOWN TIME

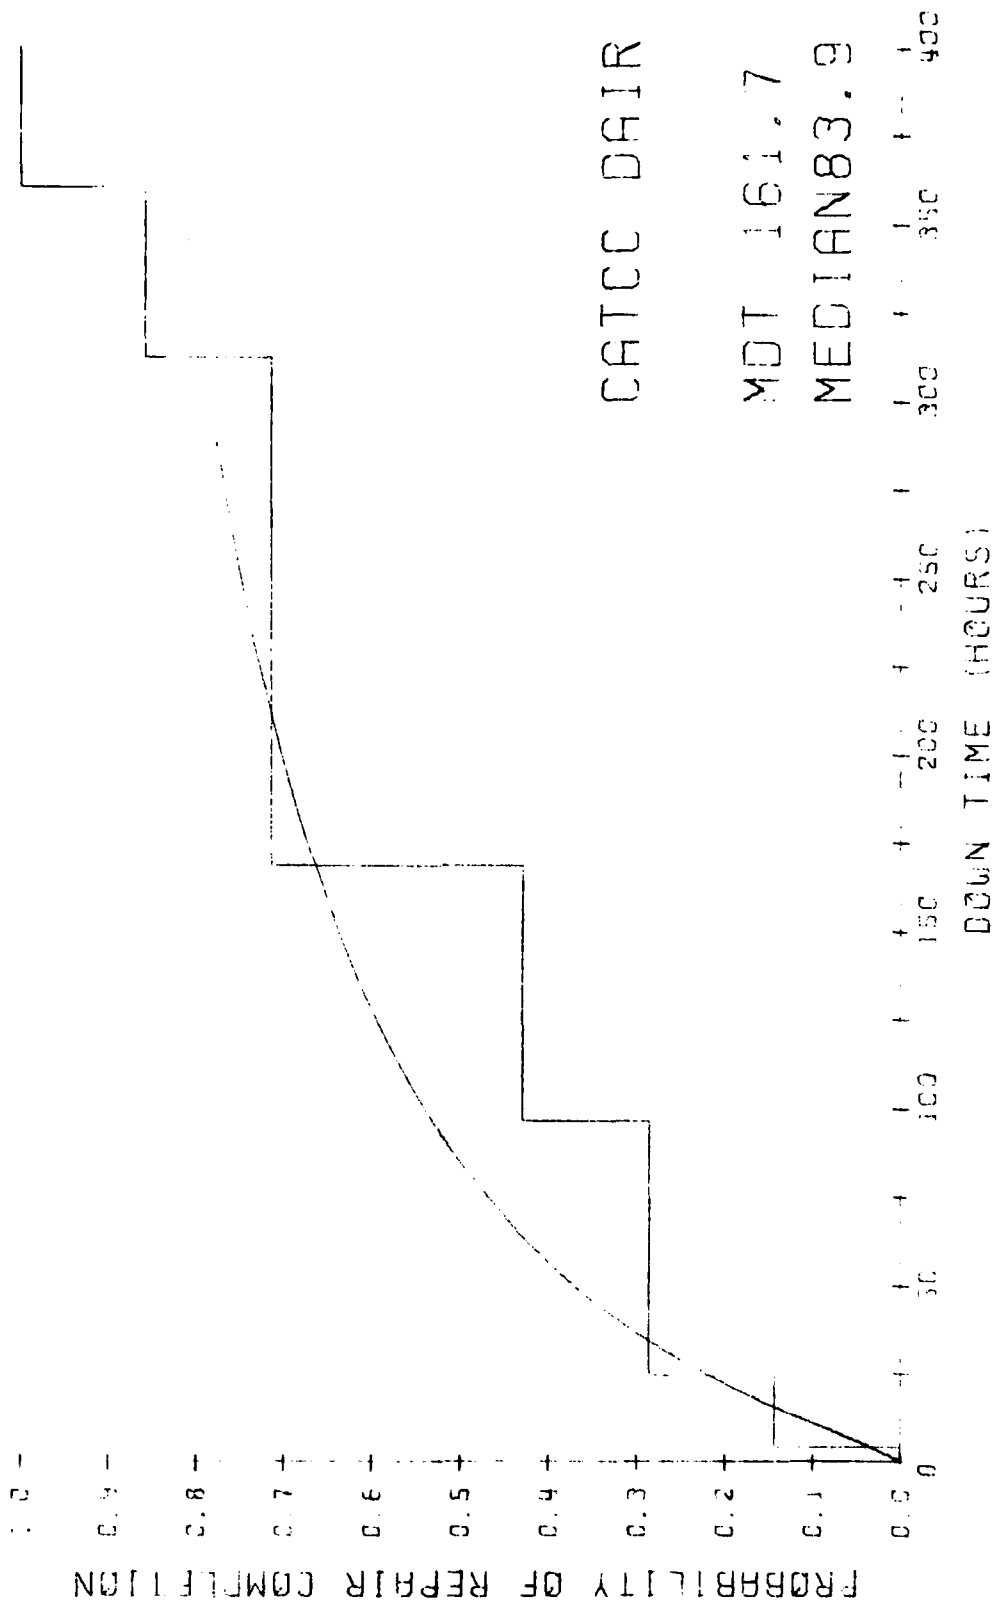

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR DOWN TIME

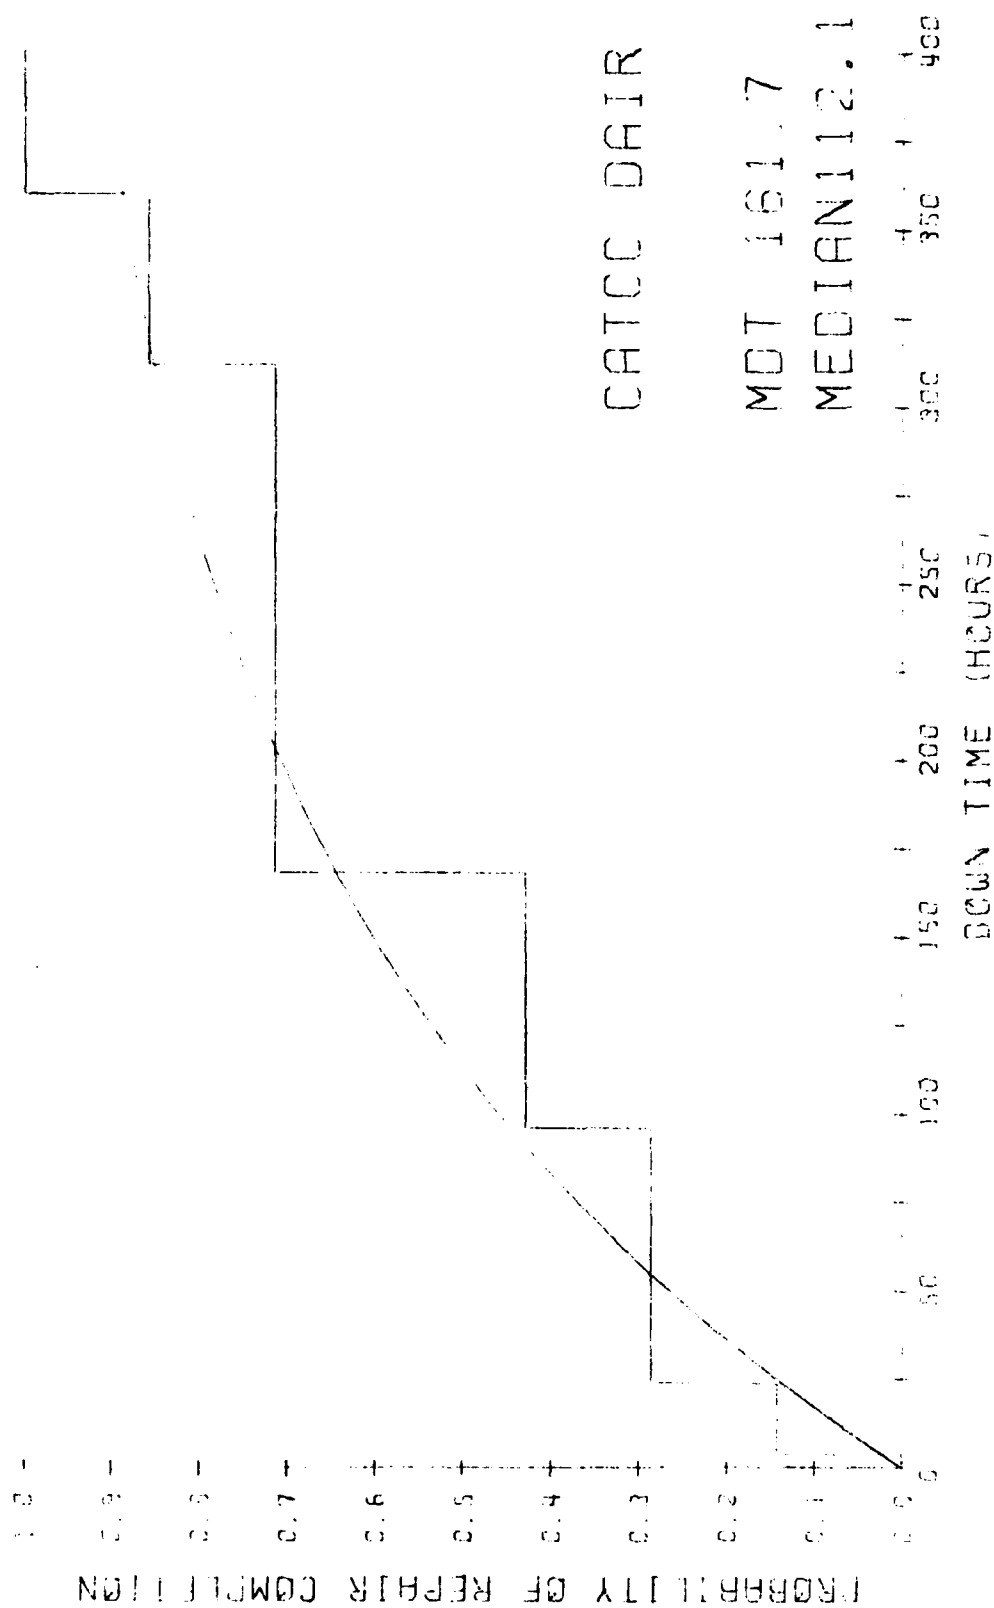

MAINTAINABILITY (REPAIR TIME)

CATCC DATA WRA 19 LEVEL

REPAIR TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.143	.177	.053	.231
2.0	2.	3.0	.429	.310	.103	.325
4.0	1.	4.0	.571	.474	.196	.444
5.0	1.	5.0	.714	.529	.239	.487
96.0	1.	6.0	.857	.972	.995	.975

TOTAL REPAIR HOURS = 110.0 NUMBER OF REPAIRS = 6. OBSERVED REPAIR RATE/HR = .5455F-01

DISTRIBUTION DETERMINATION

MEAN OF LN'S = 1.49 STD DEV OF LN'S = 1.61


K-S CRITICAL VALUE (.10, 6.) = .294 MAX DIFF CALC = .258 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

EST MEAN = 19.33 EST MEDIAN = 4.44 90 PER CENT LCL ON MEDIAN = 1.68 90 PER CENT UCL ON MEDIAN = 11.72

SPECIFIED MTR = 2.00 HOURS LOWER CONF LIM 1.68 IS LESS THAN MTR. THIS THE EQUIPMENT MEETS THE SPECIFICATIONS

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

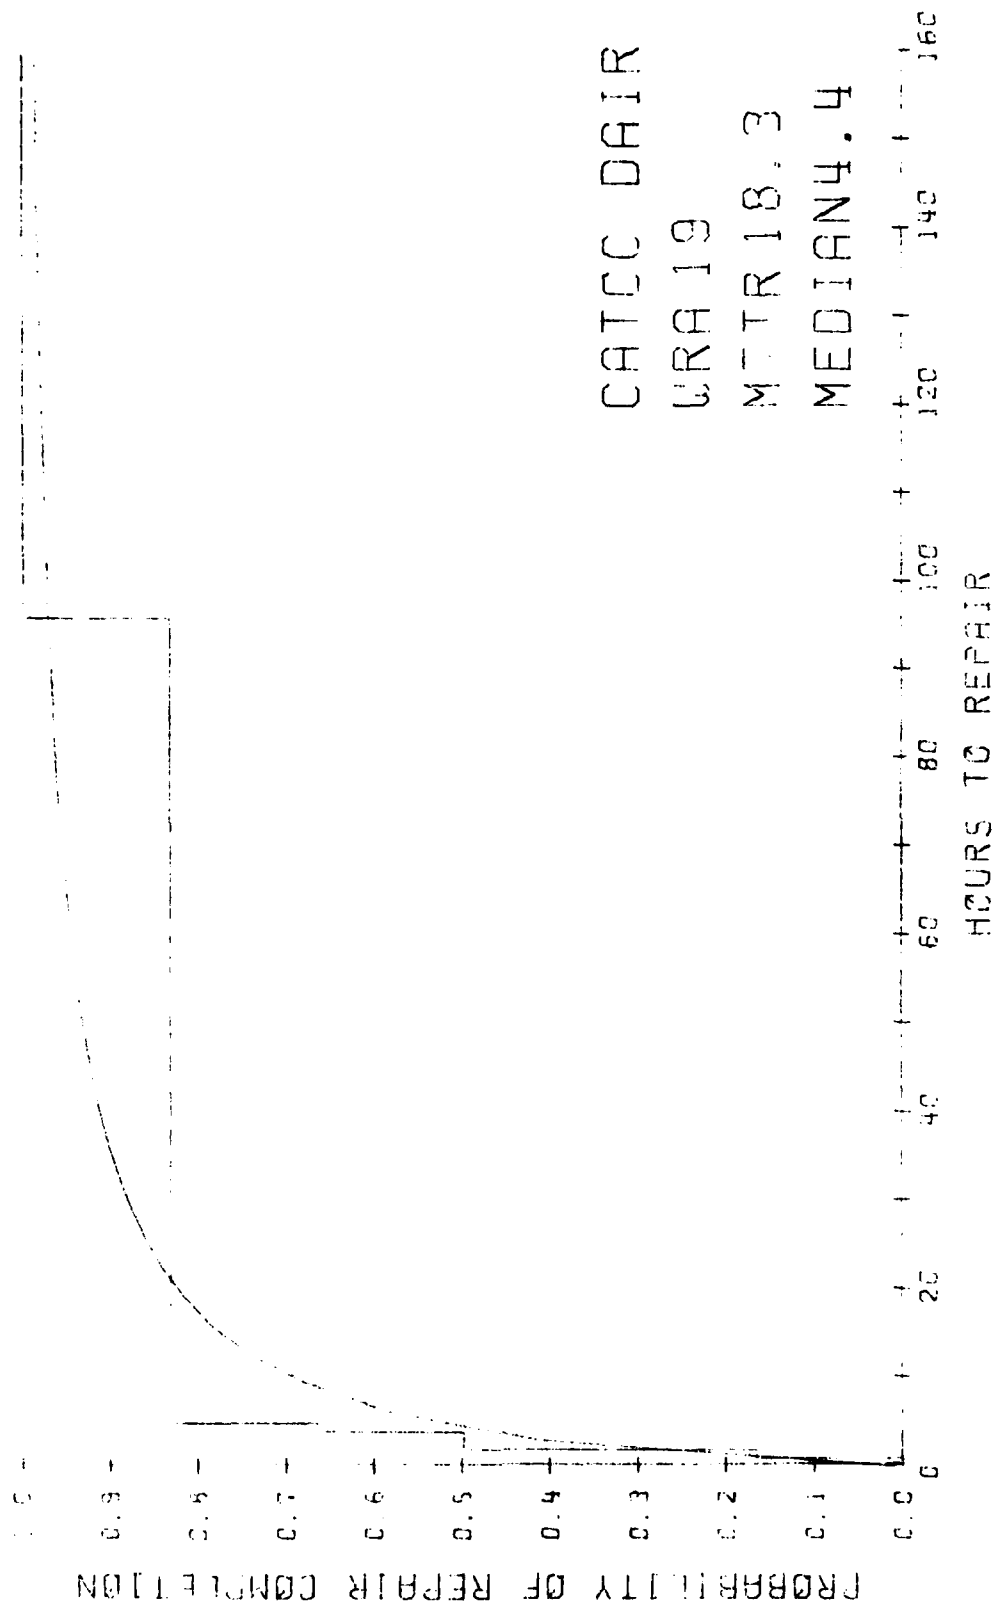

MAINTAINABILITY (REPAIR TIME)
CATCC DATA O-LEVEL SUMMARY

WRA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER REPAIRS	LOWER 90 CONF LIM	UPPER 90 CONF LIM	SPEC MTTR	OBSERVED REPAIR TIMES		MAINT PROBLEM
							LOW	MEAN	
19	2	DEFLECTION AMPLIFIED	3.	.40	84.00	2.0	1.0	33.00	96.0
19	8	INTERFACE AND LOGIC	1.	NO CONF LIMITS		2.0	2.0	2.00	2.0
19	9	VIDEO AMPLIFIER	1.	NO CONF LIMITS		2.0	5.0	5.00	5.0
19	16	PANEL (RIGHT SIDE)	1.	NO CONF LIMITS		2.0	4.0	0.00	4.0

MAINTAINABILITY (REPAIR TIME)
 2K SUMMARY FOR CATCC DATA PROBLEM AREAS
 WPA O-L O-L O-L WHAT HAPPENED

JCN

SUB-SECTION (3)

CATCC-DAIR

EQUIPMENT

RELIABILITY

DATA

SYSTEM	SHIPNAME	DATE	FTM	FAILURE TYPE	OPERATE	FAILURE TIME	DUTY	MRA	OL1	OL2	OL3
CATCC DAIR	KITTY HAWK	8288	2650.	FAILURE	0.	0.	0.000	14	39	0	0
CATCC DAIR	KITTY HAWK	8321	2658.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	KITTY HAWK	8321	2686.	FAILURE	28.	28.	0.000	19	0	0	0
CATCC DAIR	KITTY HAWK	8321	2688.	FAILURE	30.	2.	0.000	11	99	0	0
CATCC DAIR	KITTY HAWK	8348	2794.	FAILURE	136.	106.	.210	18	3	0	0
CATCC DAIR	KITTY HAWK	9010	3104.	CENSORED	446.	310.	.344	0	0	0	0
CATCC DAIR	KITTY HAWK	9011	3125.	CENSORED	467.	331.	.354	0	0	0	0
CATCC DAIR	KITTY HAWK	9029	3293.	FAILURE	635.	499.	.362	16	99	0	0
CATCC DAIR	KITTY HAWK	9135	4085.	FINAL	1427.	792.	.332	0	0	0	0
CATCC DAIR	RANGER	8164	1904.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	RANGER	8256	2455.	CENSORED	551.	551.	.250	0	0	0	0
CATCC DAIR	RANGER	8278	2702.	CENSORED	798.	798.	.292	0	0	0	0
CATCC DAIR	RANGER	8307	3386.	FAILURE	1482.	1482.	.432	19	2	0	0
CATCC DAIR	RANGER	8334	4163.	CENSORED	2259.	777.	.554	0	0	0	0
CATCC DAIR	RANGER	8363	4519.	CENSORED	2615.	1133.	.548	0	0	0	0
CATCC DAIR	RANGER	9049	5035.	FAILURE	3131.	1649.	.522	19	9	0	0
CATCC DAIR	RANGER	9058	5230.	FAILURE	3326.	195.	.535	19	16	0	0
CATCC DAIR	RANGER	9074	5514.	FAILURE	3610.	284.	.547	19	2	0	0
CATCC DAIR	RANGER	9080	5514.	FAILURE	3610.	0.	.535	19	8	0	0
CATCC DAIR	RANGER	9104	5550.	FAILURE	3646.	36.	.498	19	2	0	0

RELIABILITY

CATCC DAIRSYSTEM LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPB	EXPONENTIAL	WEIBULL
100.	.0	1.		11.	.083	.000	.006
100.	2.0	1.		10.	.167	.004	.123
100.	28.0	1.		9.	.250	.054	.317
98.	36.0	1.		8.	.333	.069	.344
100.	106.0	1.		7.	.417	.189	.480
100.	195.0	1.		6.	.500	.319	.567
100.	284.0	1.		5.	.583	.429	.623
100.	499.0	1.		4.	.667	.626	.706
	792.0		1.				
100.	1482.0	1.		2.	.778	.946	.851
100.	1649.0	1.		1.	.889	.961	.863

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 10. OBSERVED FAILURE RATE/O.H. = .19712E-02

ORATIO OF 4.399 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .989034E-01 BETA = .405053E+00

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 971.268, EST. MEDIAN = 126.364, 90 PER CENT LCL FOR MEAN = 0.000, 90 PER CENT UCL FOR MEAN = 2291.286

90 PER CENT LCL FOR BETA = .308808E+00 90 PER CENT UCL FOR BETA = .501298E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

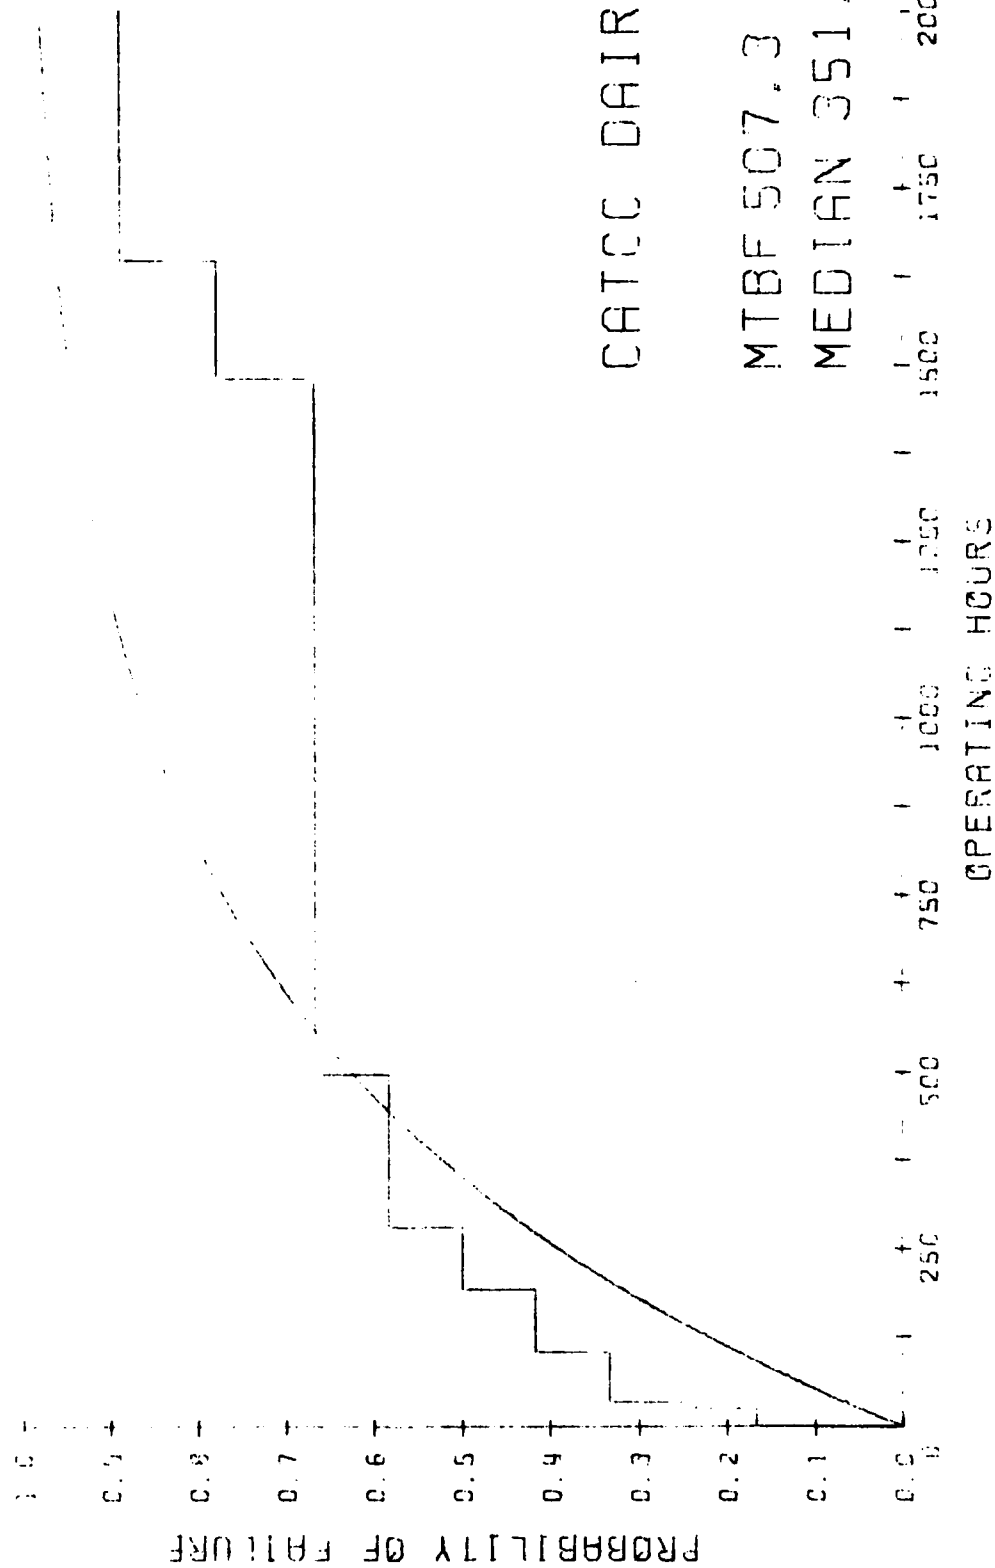


CATCC DAIR

MTBF 507.3

MEDIAN 351.6

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

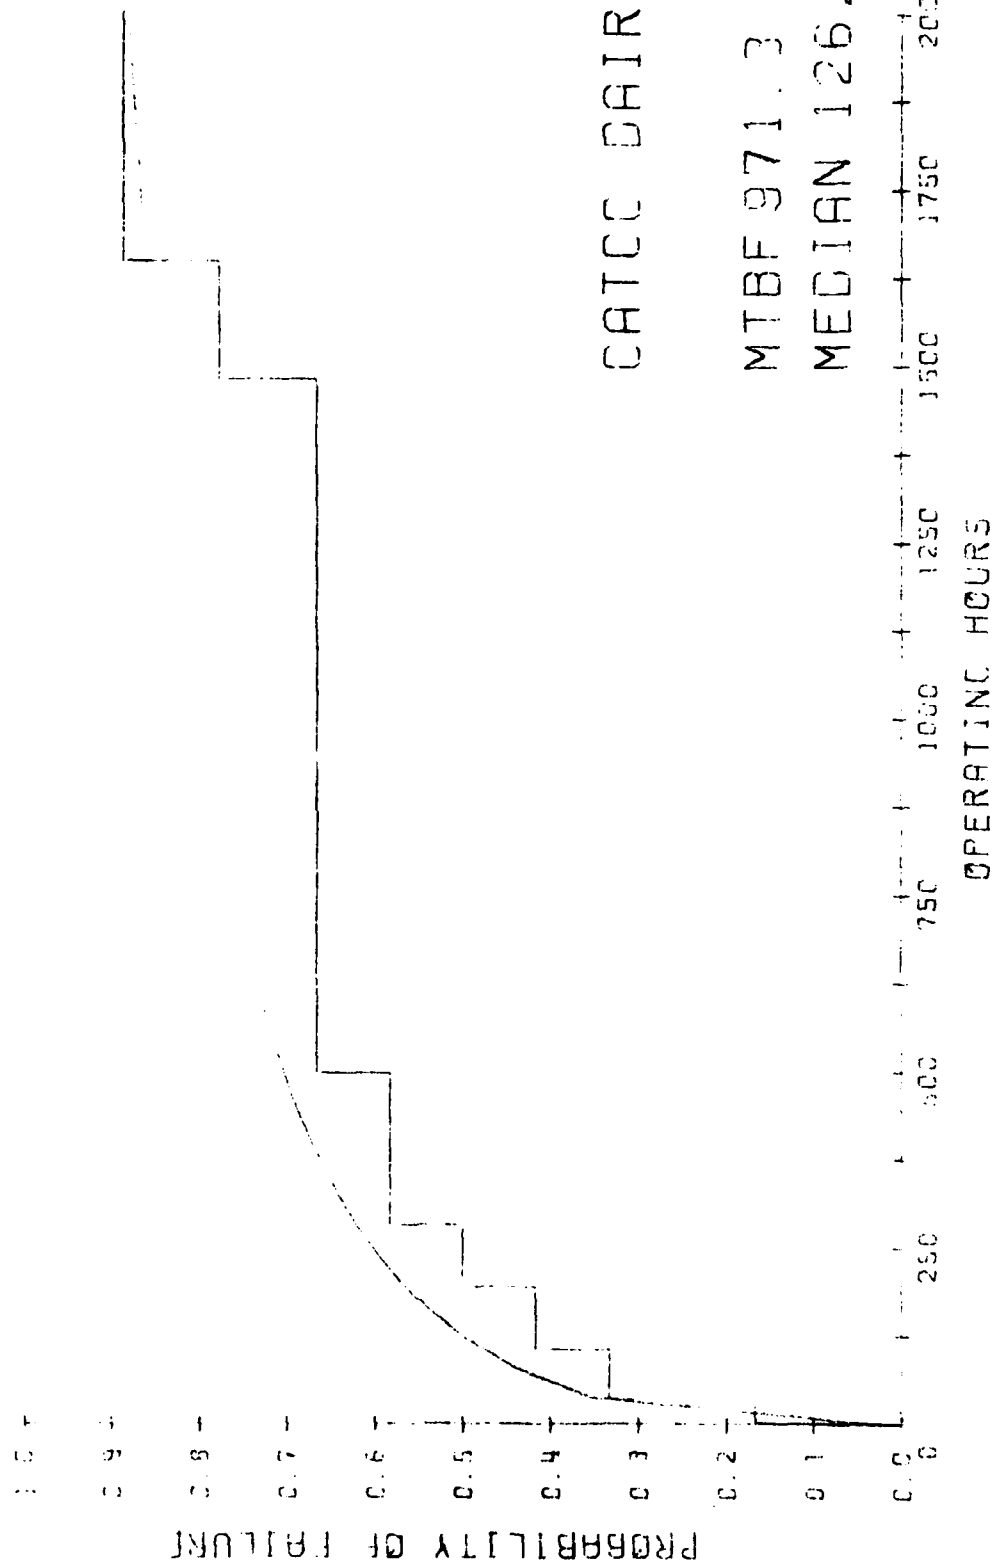

RELIABILITY

CATCC DAIR WRA 11 LEVEL

REMAINING
SYS. CAP.
100.

TIME TO FAIL
30.0
1397.0
3645.0

NO.
FAILURES
1.
NO.
CENSORED
1.
1.

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) =, 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000, EST. MEDIAN = 3516.336, 90 PER CENT LCL FOR MEAN = 1304.2, 90 PER CENT UCL FOR MEAN = 48149.203
90 PERCENT UCL 48149.20 IS GREATER THAN 11655.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 16 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED
100.	635.0	1.	1.
	792.0		1.
	3646.0		

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000. EST. MEDIAN = 3516.336, 90 PER CENT LCL FOR MEAN = 1304.2, 90 PER CENT UCL FOR MEAN = 48149.203
90 PERCENT UCL 48149.20 IS GREATER THAN 2880.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 18 LEVEL

REMAINING SYS. CAP. 100.	TIME TO FAIL 136.0 1291.0 3646.0	NO. FAILURES 1.	NO. CENSORED 1. 1.
--------------------------------	---	-----------------------	-----------------------------

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000. EST. MEDIAN = 3516.336. 90 PER CENT LCL FOR MEAN = 1304.2. 90 PER CENT UCL FOR MEAN = 48149.203
90 PERCENT UCL 48149.20 IS GREATER THAN 5000.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 19 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	NPB	EXPONENTIAL	WEIBULL
100.	.0	1.		8.	.111	.000	.009
100.	28.0	1.		7.	.222	.038	.309
98.	36.0	1.		6.	.333	.048	.333
100.	145.0	1.		5.	.444	.236	.523
100.	284.0	1.		4.	.556	.324	.572
	1399.0		1.				
100.	1482.0	1.		2.	.704	.871	.784
100.	1649.0	1.		1.	.852	.897	.797

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 7. OBSERVED FAILURE RATE/O.H. = .13799E-02

RATIO OF 3.883 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .112102E+00 BETA = .358215E+00

FOR THE ASSUMED DISTRIBUTION


EST. MEAN = 2090.828. EST. MEDIAN = 171.429, 90 PER CENT LCL FOR MEAN = 0.000, 90 PER CENT UCL FOR MEAN = 6529.923

90 PER CENT LCL FOR BETA = .241342E+00 90 PER CENT UCL FOR BETA = .475088E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

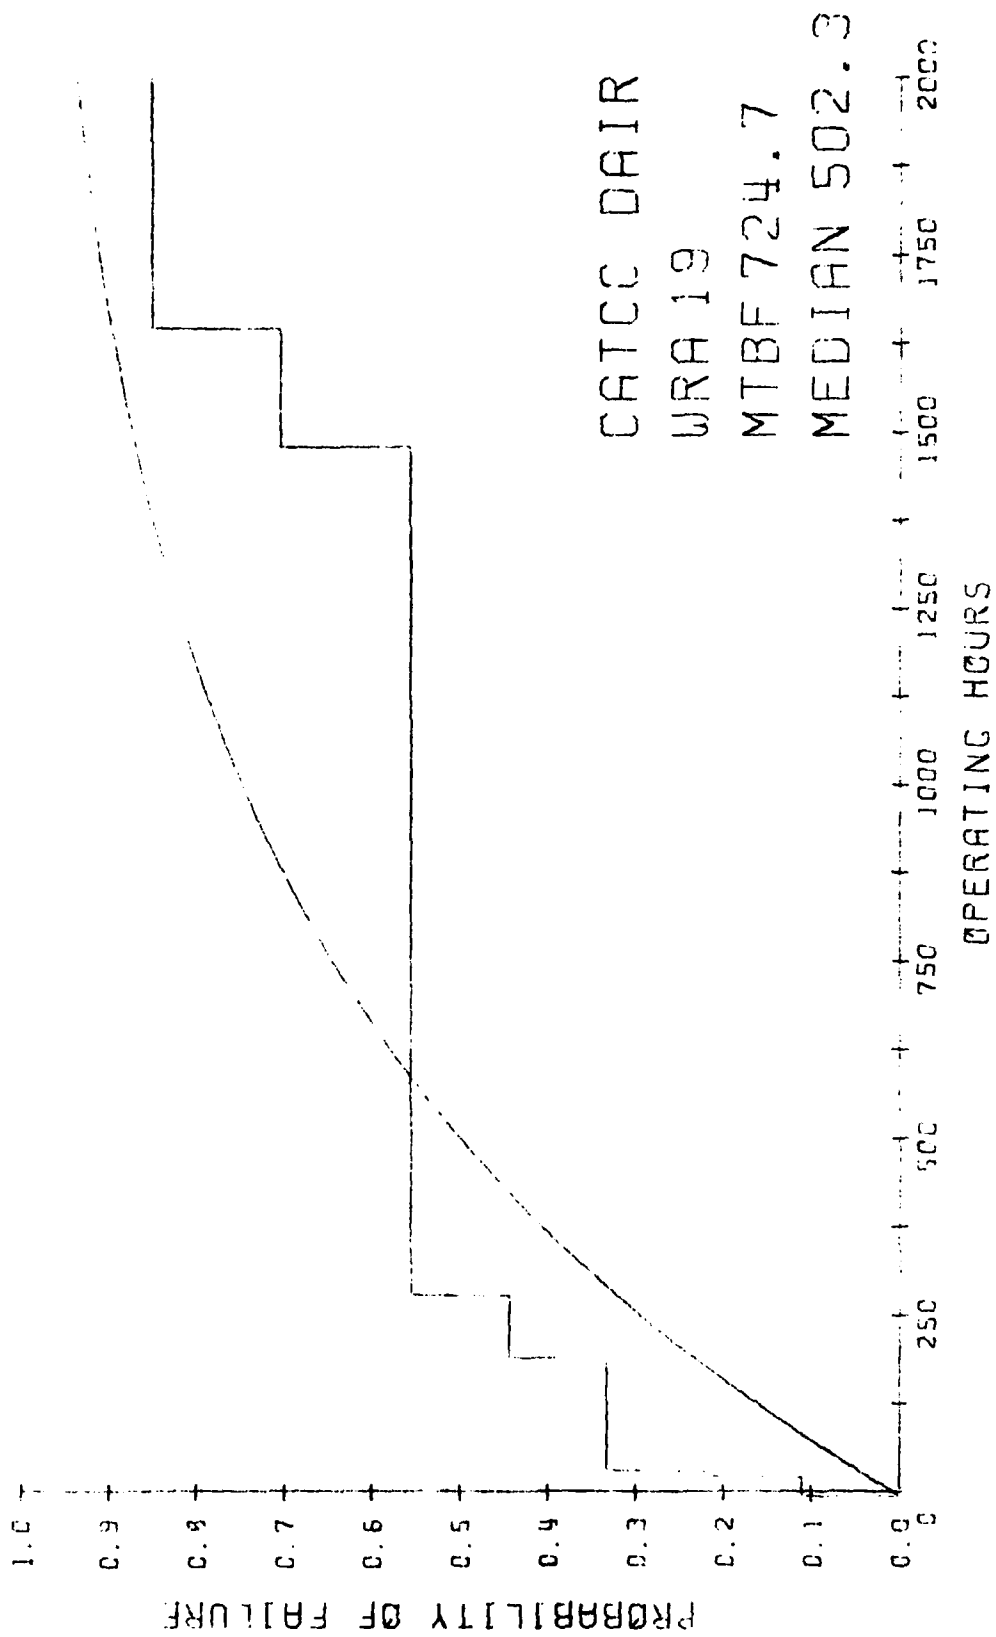

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

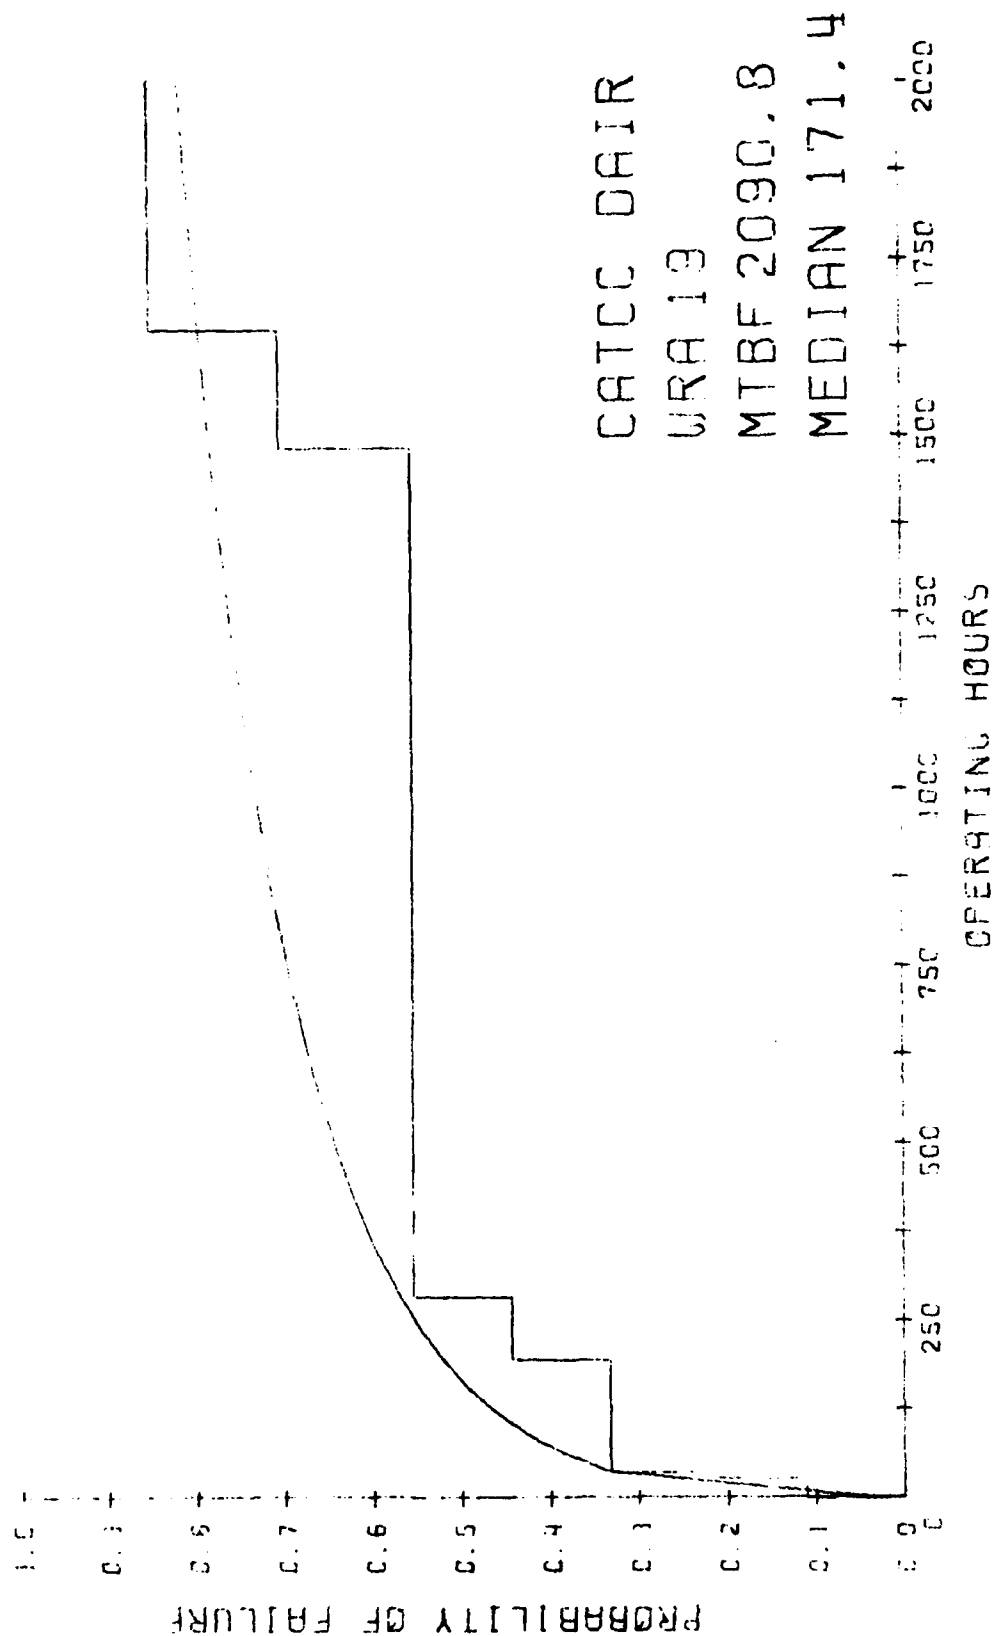

RELIABILITY

CATCC DAIR O-LEVEL SUMMARY

WRA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER FAILURES	LOWER 90 CONF LIM	MEAN	UPPER 90 CONF LIM	SPEC MTBF	OBSERVED FAILURE TIMES LOW	HIGH	RELIAB PROBLEM
11	99		1.	1304.21	5073.00	48149.20	1000000.00	30.00	30.00	YES
16	99		1.	1304.21	5073.00	48149.20	1000000.00	635.00	635.00	YES
18	3	CRT DRIVER ELECTRONICS	1.	1304.21	5073.00	48149.20	22769.00	136.00	136.00	NO
19	2	DEFLECTION AMPLIFIER	3.	759.34	1691.00	4603.18	92808.00	1482.00	3646.00	YES
19	8	INTERFACE AND LOGIC	1.	1304.21	5073.00	48149.20	23702.00	3610.00	3610.00	NO
19	9	VIDEO AMPLIFIER	1.	1304.21	5073.00	48149.20	54885.00	3131.00	3131.00	YES
19	16	PANEL (RIGHT SIDE)	1.	1304.21	5073.00	48149.20	24499.00	3326.00	3326.00	NO

RELIABILITY

2K SUMMARY FOR CATCC DAIRPROBLEM AREAS

JCN	WRA	O-L	O-L	O-L	WHAT HAPPENED
33610F010740	19	2	0	0	
33610E010763	19	9	0	0	
33610E100780	19	2	0	0	ANOTHER AMP FAILURE/SEE 1131/EK
33610E100789	19	2	0	0	ENT REPORTED AS 55054/EK

FLEET MAINTAINABILITY ASSESSMENT DATA

SYSTEM	SHIPNAME	DISCOVERED	COMPL	REPAIR TIME	DOWN TIME
CATCC DAIR	KITTY HAWK	A28A	A28A	0.	0.
CATCC DAIR	KITTY HAWK	A321	A321	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	A321	A321	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	A348	A348	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	KITTY HAWK	9029	9029	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	RANGER	8307	A314	95.	168.
CATCC DAIR	RANGER	9049	9053	5.	96.
CATCC DAIR	RANGER	905A	9058	4.	4.
CATCC DAIR	RANGER	9074	9075	1.	24.
CATCC DAIR	RANGER	9080	9087	2.	168.
CATCC DAIR	RANGER	9104	9117	2.	312.

MAINTAINABILITY (REPAIR TIME)

CATCC DATA SYSTEM LEVEL

REPAIR TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.143	.177	.053	.231
2.0	2.	3.0	.429	.310	.103	.325
4.0	1.	4.0	.571	.474	.196	.444
5.0	1.	5.0	.714	.529	.239	.487
96.0	1.	6.0	.857	.972	.995	.975

TOTAL REPAIR HOURS = 110.0 NUMBER OF REPAIRS = 6. OBSERVED REPAIR RATE/HR = .5455F-01

DISTRIBUTION DETERMINATION

MEAN OF LN'S = 1.49 STD DEV OF LN'S = 1.61

K-S CRITICAL VALUE (.10, 6.) = .294 MAX DIFF CALC = .258 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

EST MEAN = 14.73

FST MEDIAN = 4.44

90 PER CENT LCL ON MEDIAN = 1.68


90 PER CENT UCL ON MEDIAN = 11.72

SPECIFIED MTTR = 2.00 HOURS

LOWER CONF LIM

1.68 IS LESS THAN MTTR. THUS THE EQUIPMENT MEETS THE SPECIFICATIONS

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

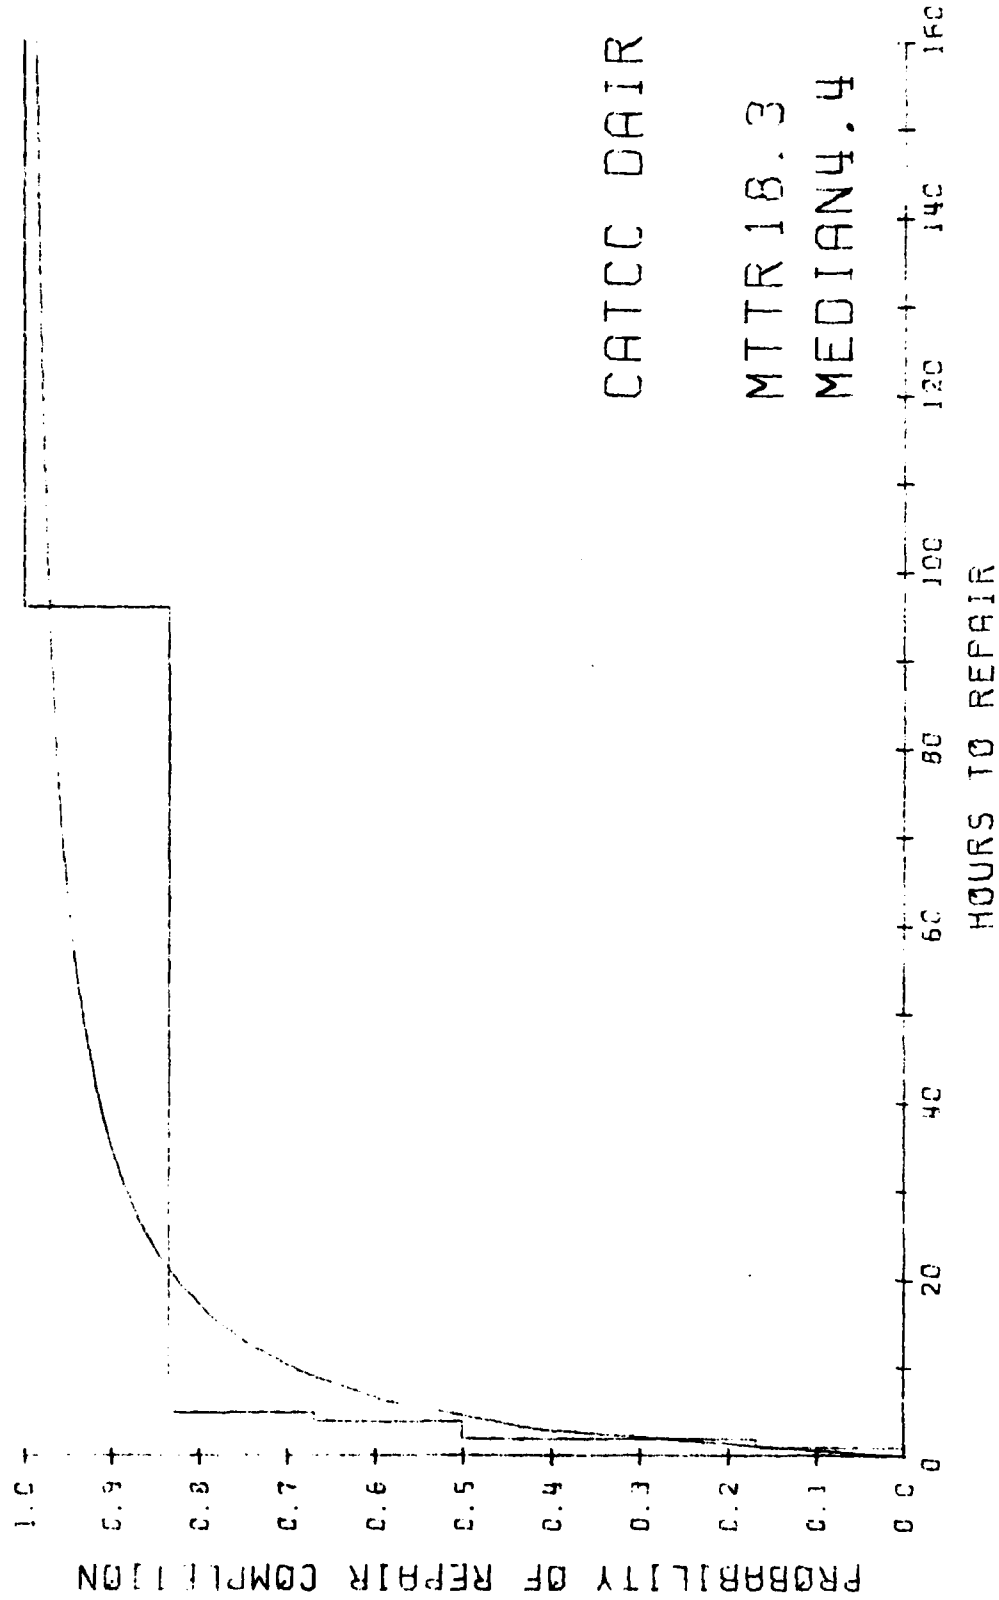

CATCC DAIR

MTTR 18.3

MEDIAN 4.4

MAINTAINABILITY (DOWN TIME)

CATCC DATA SYSTEM LEVEL

DOWN TIME.	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
4.0	1.	1.0	.143	.042	.031	.034
24.0	1.	2.0	.286	.267	.170	.179
96.0	1.	3.0	.429	.592	.526	.532
168.0	2.	5.0	.714	.718	.729	.730
312.0	1.	6.0	.857	.831	.912	.908

TOTAL DOWN TIME (TOT) = 772.0 NUMBER OF REPAIRS (NR) = 6. OBSERVED DOWN TIME/REPAIR (TOT/NR) = 128.67

DISTRIBUTION DETERMINATION

MEAN OF LN'S = 4.19 STD DEV OF LN'S = 1.62

K-S CRITICAL VALUE (.10, 6.) = .294 MAX DIFF CALC = .306 IS GREATER THAN THE CRITICAL VALUE


THEREFORE THE LOGNORMAL DISTRIBUTION CANNOT BE ASSUMED

RATIO OF 3.360 DOES NOT EXCEED THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THEREFORE THE EXPONENTIAL DISTRIBUTION IS ASSUMED

EST MEAN = 128.67 EST MEDIAN = 89.18 90 PER CENT LCL ON MEAN = 83.24 90 PER CENT UCL ON MEAN = 244.93

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
LOGNORMAL PROBABILITY DISTRIBUTION FOR DOWN TIME

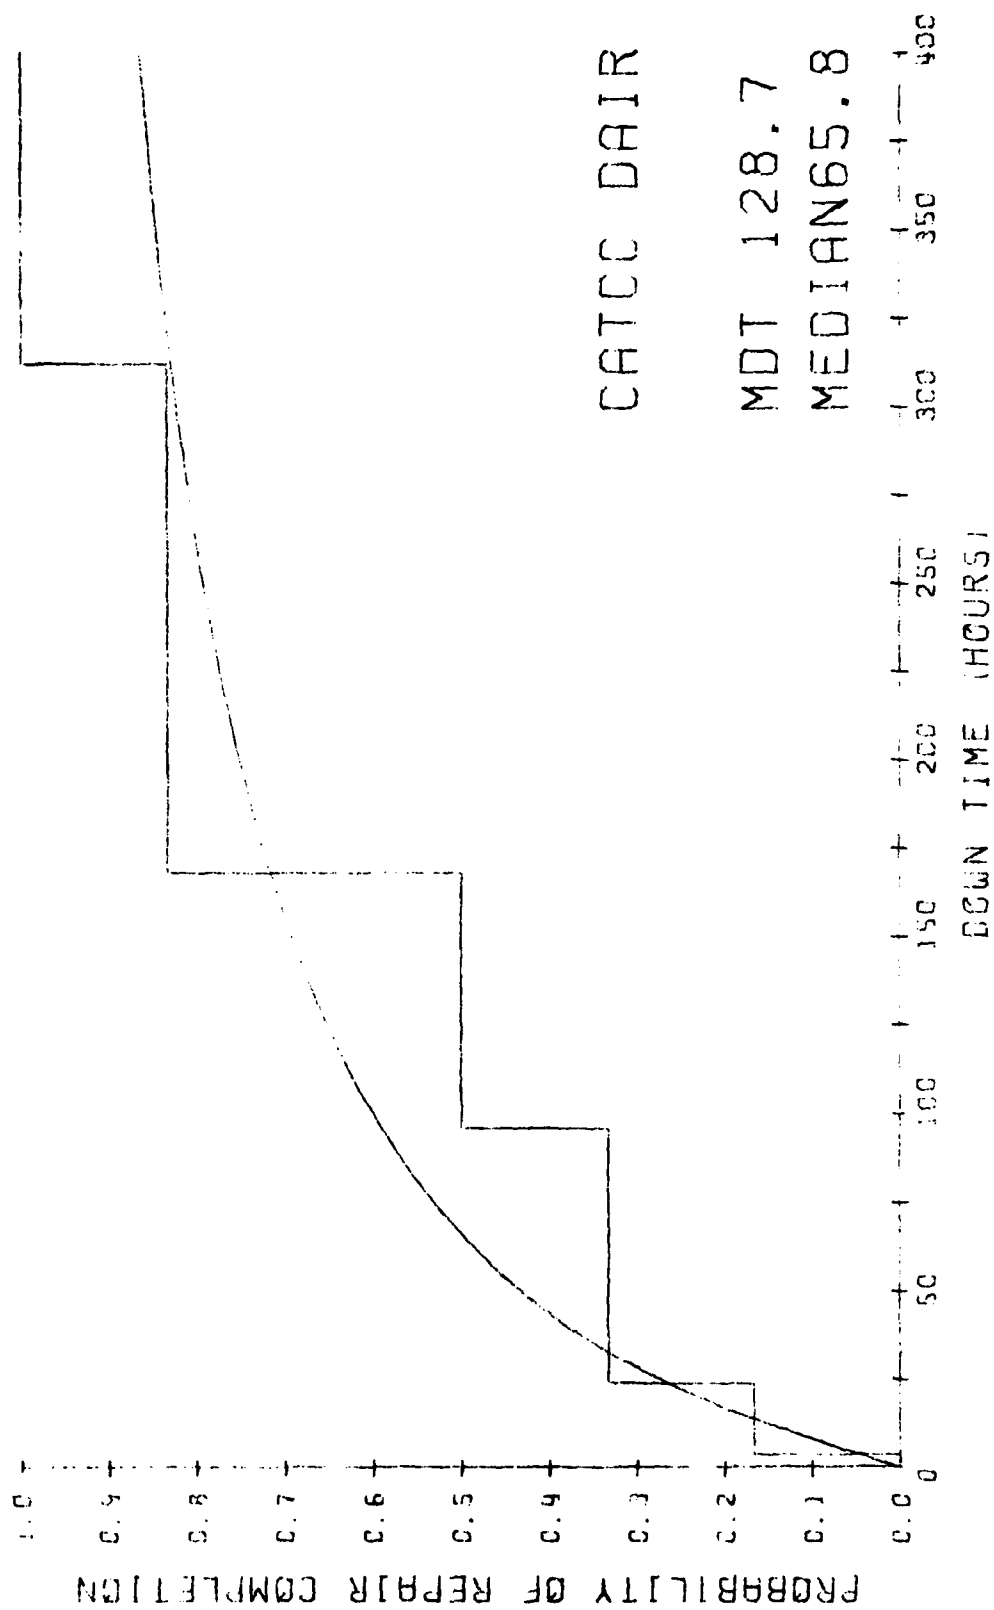

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR DOWN TIME

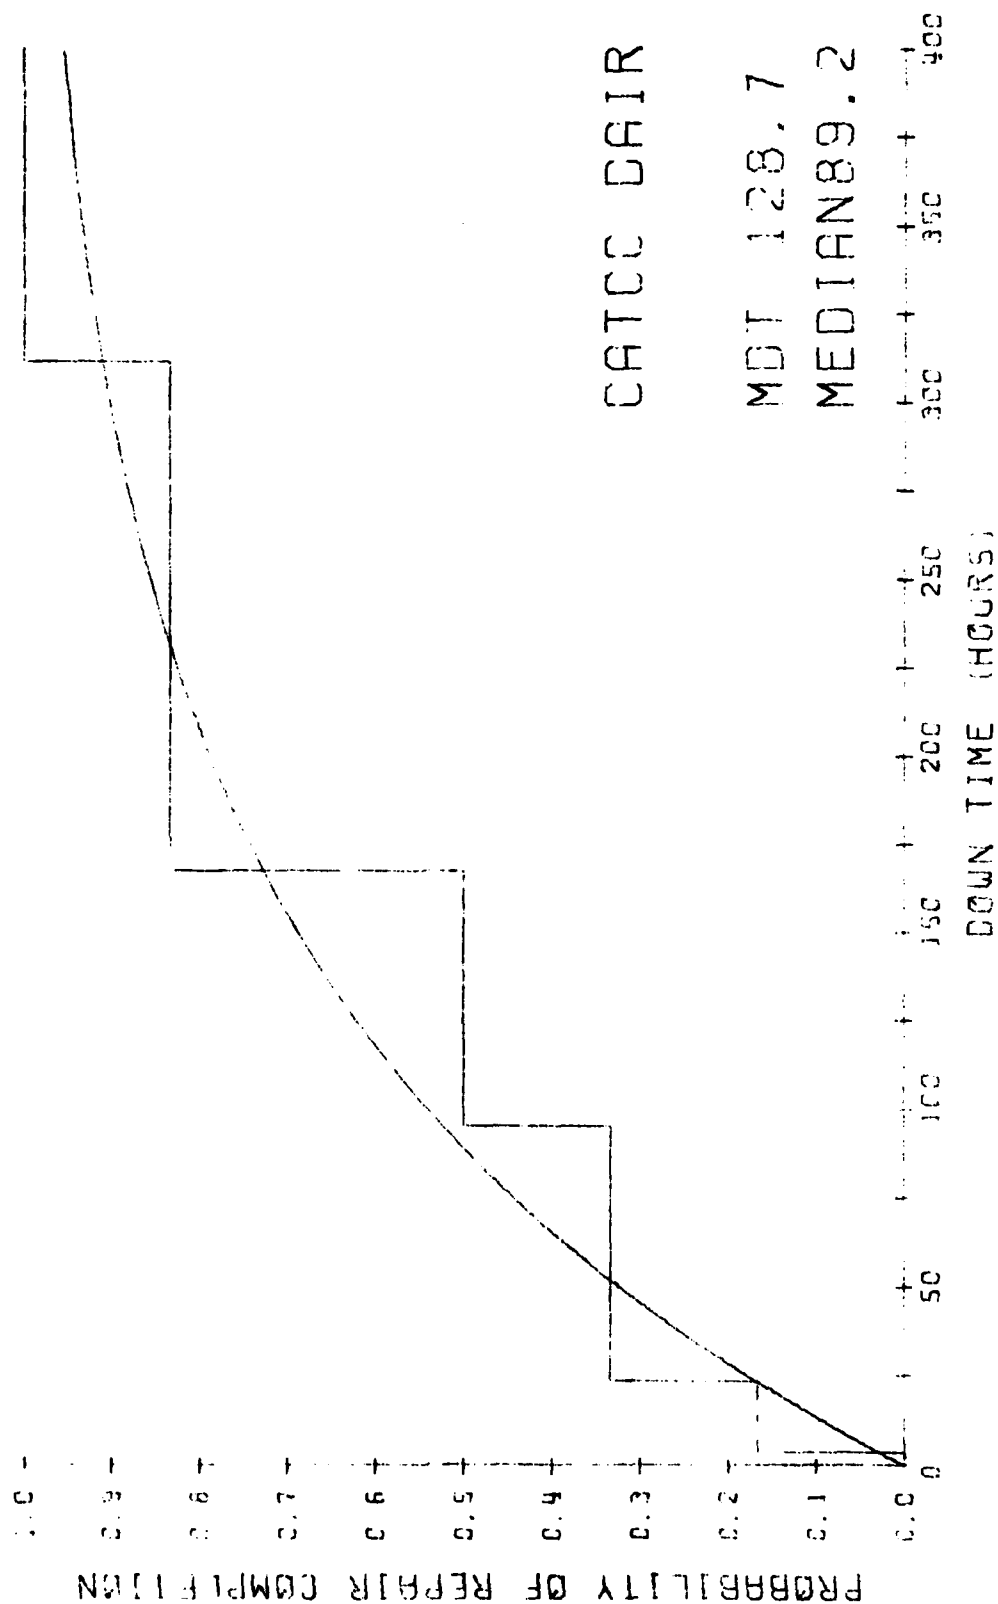

CATCC DAIR

MDT 128.7

MEDIAN 89.2

MAINTAINABILITY (REPAIR TIME)

CATCC DAIR WRA 19 LEVEL

REPAIR TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.143	.177	.053	.231
2.0	2.	3.0	.429	.310	.103	.325
4.0	1.	4.0	.571	.474	.196	.444
5.0	1.	5.0	.714	.529	.239	.487
96.0	1.	6.0	.857	.972	.995	.975

TOTAL REPAIR HOURS = 110.0 NUMBER OF REPAIRS = 6 OBSERVED REPAIR RATE/HR = .5455F-01

DISTRIBUTION DETERMINATION

MEAN OF LN'S = 1.49 STD DEV OF LN'S = 1.61


K-S CRITICAL VALUE (.10, 6.) = .294 MAX DIFF CALC = .258 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

FST MEAN = 18.33 EST MEDIAN = 4.44 90 PER CENT LCL ON MEDIAN = 1.68 90 PER CENT UCL ON MEDIAN = 11.72

SPECIFIED MTTR = 2.00 HOURS LOWER CONF LIM 1.68 IS LESS THAN MTTR, THUS THE EQUIPMENT MEETS THE SPECIFICATIONS

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
 LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

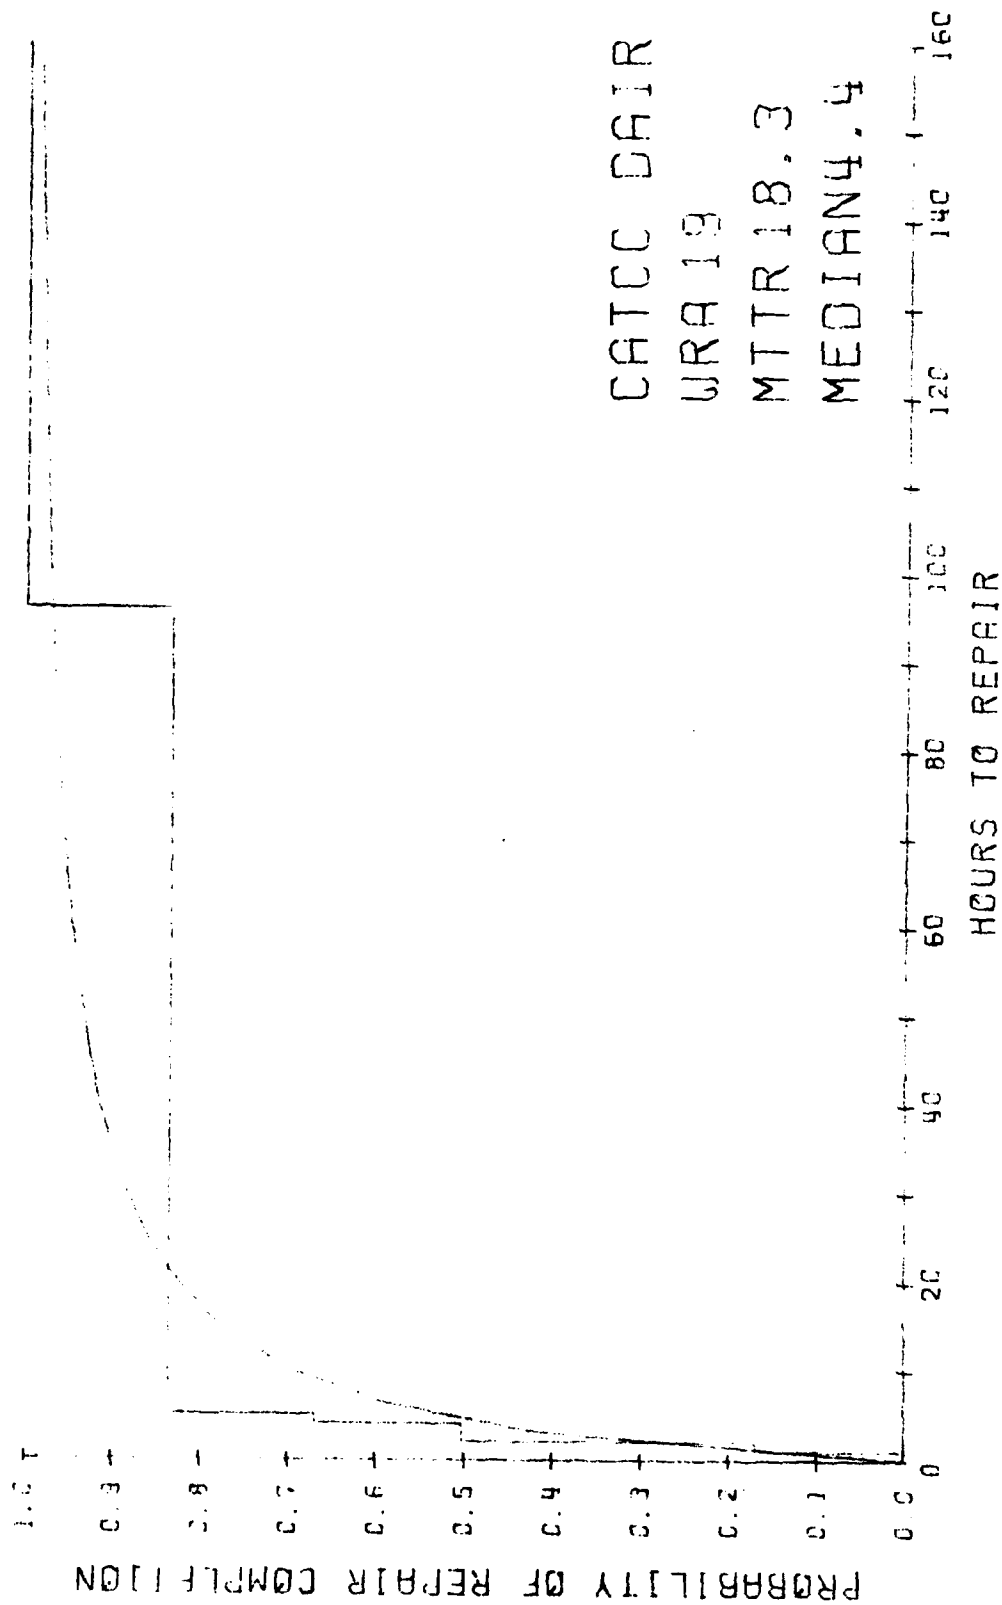

MAINTAINABILITY (REPAIR TIME)

CATCC DAIR O-LEVEL SUMMARY

WPA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER REPAIRS	LOWER 90 CONF LIM	UPPER 90 CONF LIM	SPFC MTTR	OBSERVED REPAIR TIMES LOW	MEAN	HIGH	MAINT PROBLEM
19	2	DEFLECTION AMPLIFIER	3.	.40	84.00	2.0	1.0	33.00	96.0	NO
19	8	INTERFACE AND LOGIC	1.	NO CONF LIMITS		2.0	2.0	2.00	2.0	
19	9	VIDEO AMPLIFIER	1.	NO CONF LIMITS		2.0	5.0	5.00	5.0	
19	16	PANEL (RIGHT SIDE)	1.	NO CONF LIMITS		2.0	4.0	0.00	4.0	

MAINTAINABILITY (REPAIR TIME)
 2K SUMMARY FOR CATCC DAIR PROBLEM AREAS
 WRA O-L O-L O-L WHAT HAPPENED

JCA

RMA SUMMARY CATCC DAIR EQUIP. RELIABILITY SYSTEM LEVEL

TTF DISTRIBUTION IS WEIBULL WITH ALPHA = .09890 AND BETA = .40500 MFAN = 971.27
 DT DISTRIBUTION IS EXPONENTIAL WITH MEAN = 128.67
 LT DISTRIBUTION IS LOGNORMAL WITH MEAN OF LNS = 1.49000 AND STANDARD DEVIATION OF LNS = 1.61000

INHERENT AVAILABILITY = MTBF/(MTBF+MTTR)

MEAN TIME TO FAILURE = 971.27

MEAN REPAIR TIME = 14.08

INHERENT AVAILABILITY = .9857

OBSERVED AVAILABILITY (SIMULATION OF RATIOS TTF/(TTF+DT))

90 PERCENT LCL ON INDIVIDUALS = .0017

90 PERCENT UCL ON INDIVIDUALS = .9793

MEAN = .5245

MEDIAN = .5773

SUB-SECTION (4)

CATCC-DAIR

PARTS

REPLACEMENT

FLEET RELIABILITY ASSESSMENT DATA											
SYSTEM	SHIP NAME	DATE	FTM	FAILURE TYPE	OPERATE	FAILURE TIME	DUTY	MRA	OL1	OL2	OL3
CATCC DAIR	KITTY HAWK	8250.	2650.	FAILURE	0.	0.	0.000	14	39	0	0
CATCC DAIR	KITTY HAWK	8321	2658.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	KITTY HAWK	8321	2686.	FAILURE	28.	28.	0.000	19	0	0	0
CATCC DAIR	KITTY HAWK	8321	2688.	FAILURE	30.	2.	0.000	11	99	0	0
CATCC DAIR	KITTY HAWK	8348	2794.	FAILURE	136.	106.	.210	18	3	0	0
CATCC DAIR	KITTY HAWK	9010	3114.	CENSORED	446.	310.	.344	0	0	0	0
CATCC DAIR	KITTY HAWK	9011	3125.	CENSORED	467.	331.	.354	0	0	0	0
CATCC DAIR	KITTY HAWK	9029	3293.	CENSORED	635.	499.	.362	16	99	0	0
CATCC DAIR	KITTY HAWK	9135	4085.	FINAL	1427.	1291.	.332	0	0	0	0
CATCC DAIR	HANGEM	8164	1904.	INITIAL	0.	0.	0.000	0	0	0	0
CATCC DAIR	HANGEM	8256	2455.	CENSORED	551.	551.	.250	0	0	0	0
CATCC DAIR	HANGEM	8278	2702.	CENSORED	798.	798.	.292	0	0	0	0
CATCC DAIR	HANGEM	8307	3786.	FAILURE	1482.	1482.	.432	19	2	0	0
CATCC DAIR	HANGEM	8334	4183.	CENSORED	2259.	777.	.554	0	0	0	0
CATCC DAIR	HANGEM	8363	4519.	CENSORED	2615.	1133.	.548	0	0	0	0
CATCC DAIR	HANGEM	9049	5035.	FAILURE	3131.	1649.	.522	19	9	0	0
CATCC DAIR	HANGEM	9058	5240.	FAILURE	3326.	195.	.535	19	16	0	0
CATCC DAIR	HANGEM	9074	5514.	FAILURE	3610.	284.	.547	19	2	0	0
CATCC DAIR	HANGEM	9080	5514.	FAILURE	3610.	0.	.535	19	8	0	0
CATCC DAIR	HANGEM	9104	5550.	FAILURE	3646.	36.	.498	19	2	0	0

RELIABILITY CATC DAINSYSTEM LEVEL

REMAINING SYS. CAP.	TIME TO FAIL H.	NO. FAILURES	NO. CENSORED	SURVIVORS	MPD	EXPONENTIAL	WEIBULL
100.	0.	1.		10.	.091	.000	.010
100.	2.0	1.		9.	.182	.004	.151
100.	25.0	1.		8.	.273	.048	.347
98.	36.0	1.		7.	.364	.062	.373
100.	105.0	1.		6.	.455	.171	.499
100.	145.0	1.		5.	.545	.292	.578
100.	244.0	1.		4.	.636	.396	.628
	1291.0		1.				
100.	1442.0	1.		2.	.758	.928	.835
100.	1444.0	1.		1.	.879	.946	.846

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 9. OBSERVED FAILURE RATE/O.H. = .17741E-02

GRATIO OF 6.226 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .127400E+00 BETA = .362814E+00

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 1304.031. EST. MEDIAN = 111.000. 90 PER CENT LCL FOR MEAN = 0.000. 90 PER CENT UCL FOR MEAN = 3591.256

90 PER CENT LCL FOR BETA = .261647E+00 90 PER CENT UCL FOR BETA = .463980E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

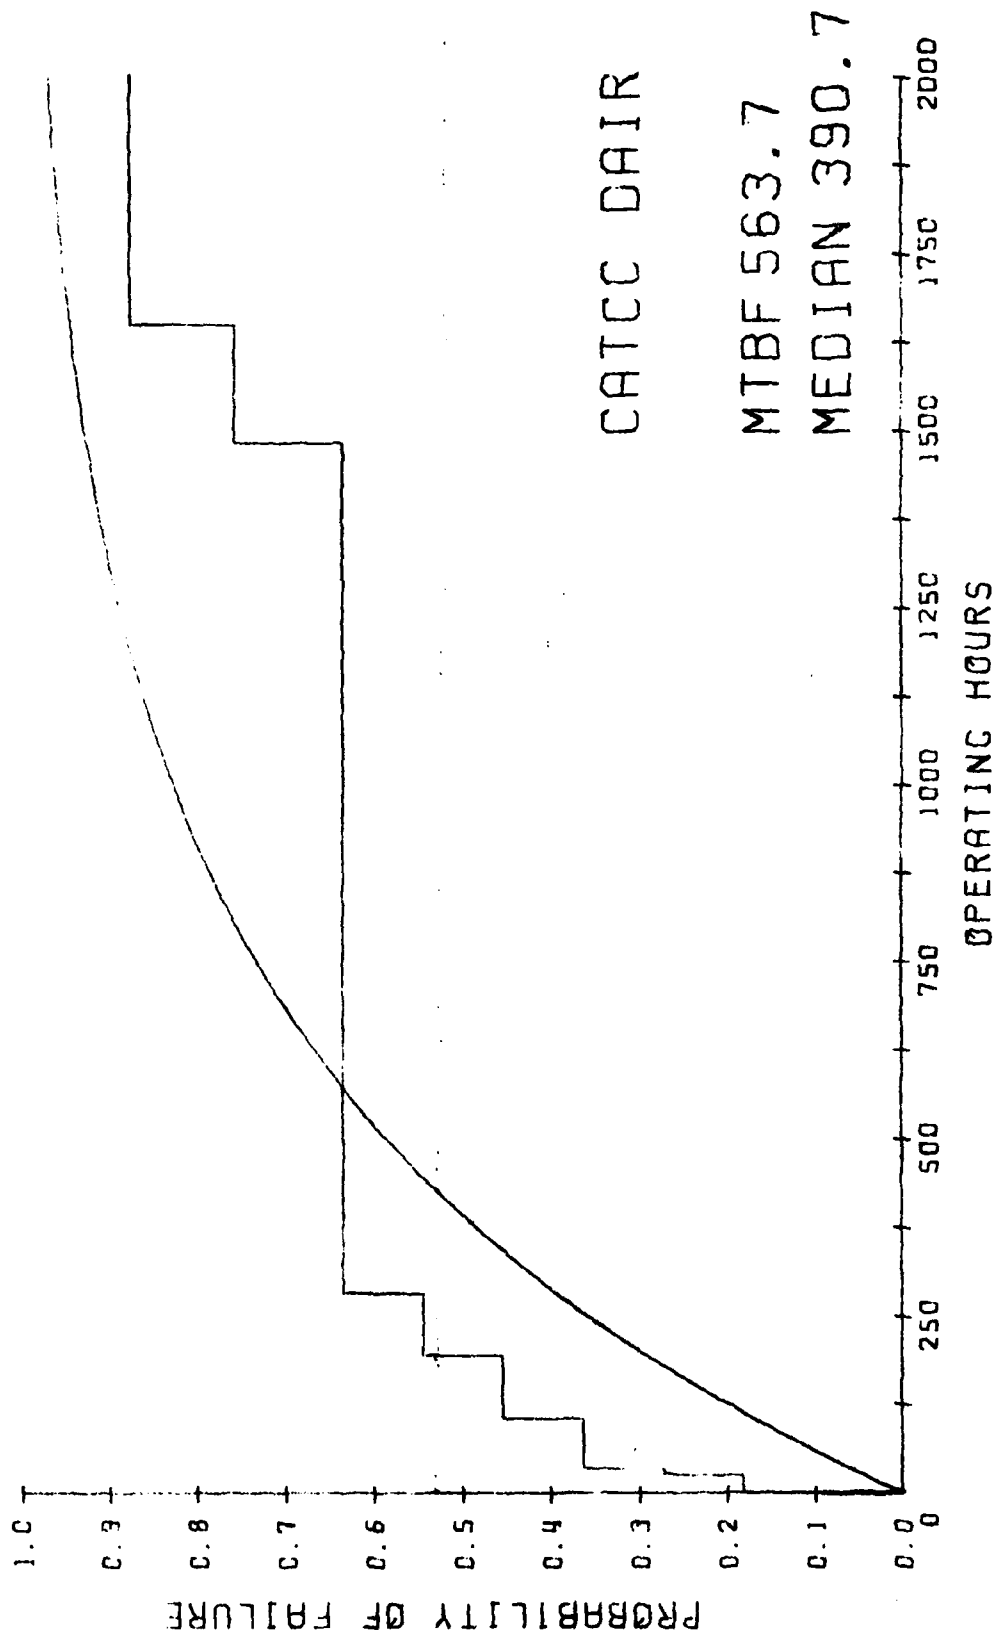


CATCC DAIR

MTBF 563.7

MEDIAN 390.7

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

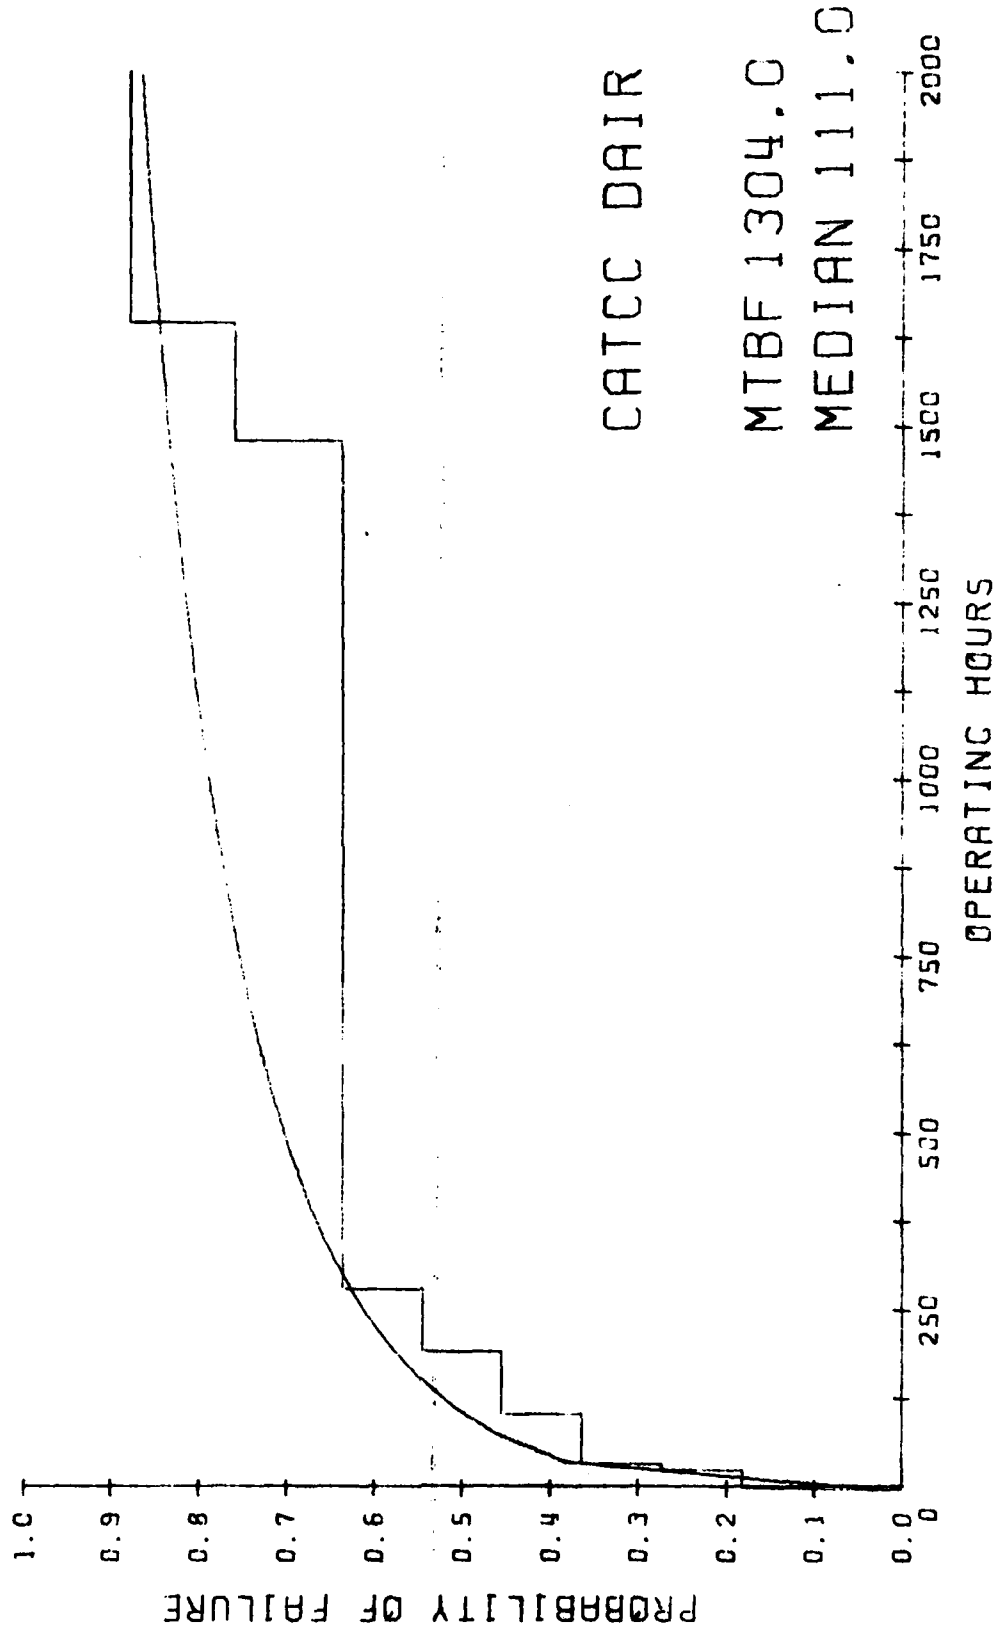

CATCC DAIR

MTBF 1304.0

MEDIAN 111.0

RELIABILITY CATCC JAIR WRA 11 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED
100.	30.0	1.	
	1397.0		1.
	3646.0		1.

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED
FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000. EST. MEDIAN = 3516.336, 90 PER CENT LCL FOR MEAN = 1304.2, 90 PER CENT UCL FOR MEAN = 48149.203
90 PERCENT UCL 48149.20 IS GREATER THAN 11655.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 18 LEVEL

REMAINING	TIME TO FAIL	NO.	NO.
SYS. CAP.	136.0	FAILURES	CENSORED
100.	1.	1.	1.
	1241.0		
	3646.0		

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS(C.H.) = 11616.0 DUTY CYCLE (O.H./C.H.) = .437

NUMBER OF FAILURES = 1. OBSERVED FAILURE RATE/O.H. = .19712E-03

LESS THAN FOUR FAILURES THE EXPONENTIAL DISTRIBUTION IS ASSUMED

FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 5073.000, EST. MEDIAN = 3516.336, 90 PER CENT LCL FOR MEAN = 1304.2, 90 PER CENT UCL FOR MEAN = 48149.203
 90 PERCENT UCL 48149.20 IS GREATER THAN 5000.00 HOURS, THEREFORE THE EQUIPMENT MEETS THE SPECIFICATIONS

RELIABILITY

CATCC DAIR WRA 19 LEVEL

REMAINING SYS. CAP.	TIME TO FAIL	NO. FAILURES	NO. CENSORED	SURVIVORS	MPD	EXPONENTIAL	WEIBULL
100.	.0	1.		8.	.111	.000	.009
100.	28.0	1.		7.	.222	.038	.309
98.	36.0	1.		6.	.333	.048	.333
100.	195.0	1.		5.	.444	.236	.523
100.	284.0	1.		4.	.556	.324	.572
	1399.0		1.				
100.	1482.0	1.		2.	.704	.871	.784
100.	1649.0	1.		1.	.852	.897	.797

EQUIPMENT OPERATING HOURS (O.H.) = 5073.0 CALENDAR HOURS (C.H.) =, 11616.0 DUTY CYCLE (O.H./C.H.) = .437


NUMBER OF FAILURES = 7. OBSERVED FAILURE RATE/O.H. = .13799E-02

CRATIO OF 3.883 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THE WEIBULL PARAMETERS ARE ALPHA = .112102E+00 BETA = .358215E+00
FOR THE ASSUMED DISTRIBUTION

EST. MEAN = 2090.828, EST. MEDIAN = 171.629, 90 PER CENT LCL FOR MEAN = 0.000, 90 PER CENT UCL FOR MEAN = 6529.923
90 PER CENT LCL FOR BETA = .241342E+00 90 PER CENT UCL FOR BETA = .475088E+00

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
EXPONENTIAL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

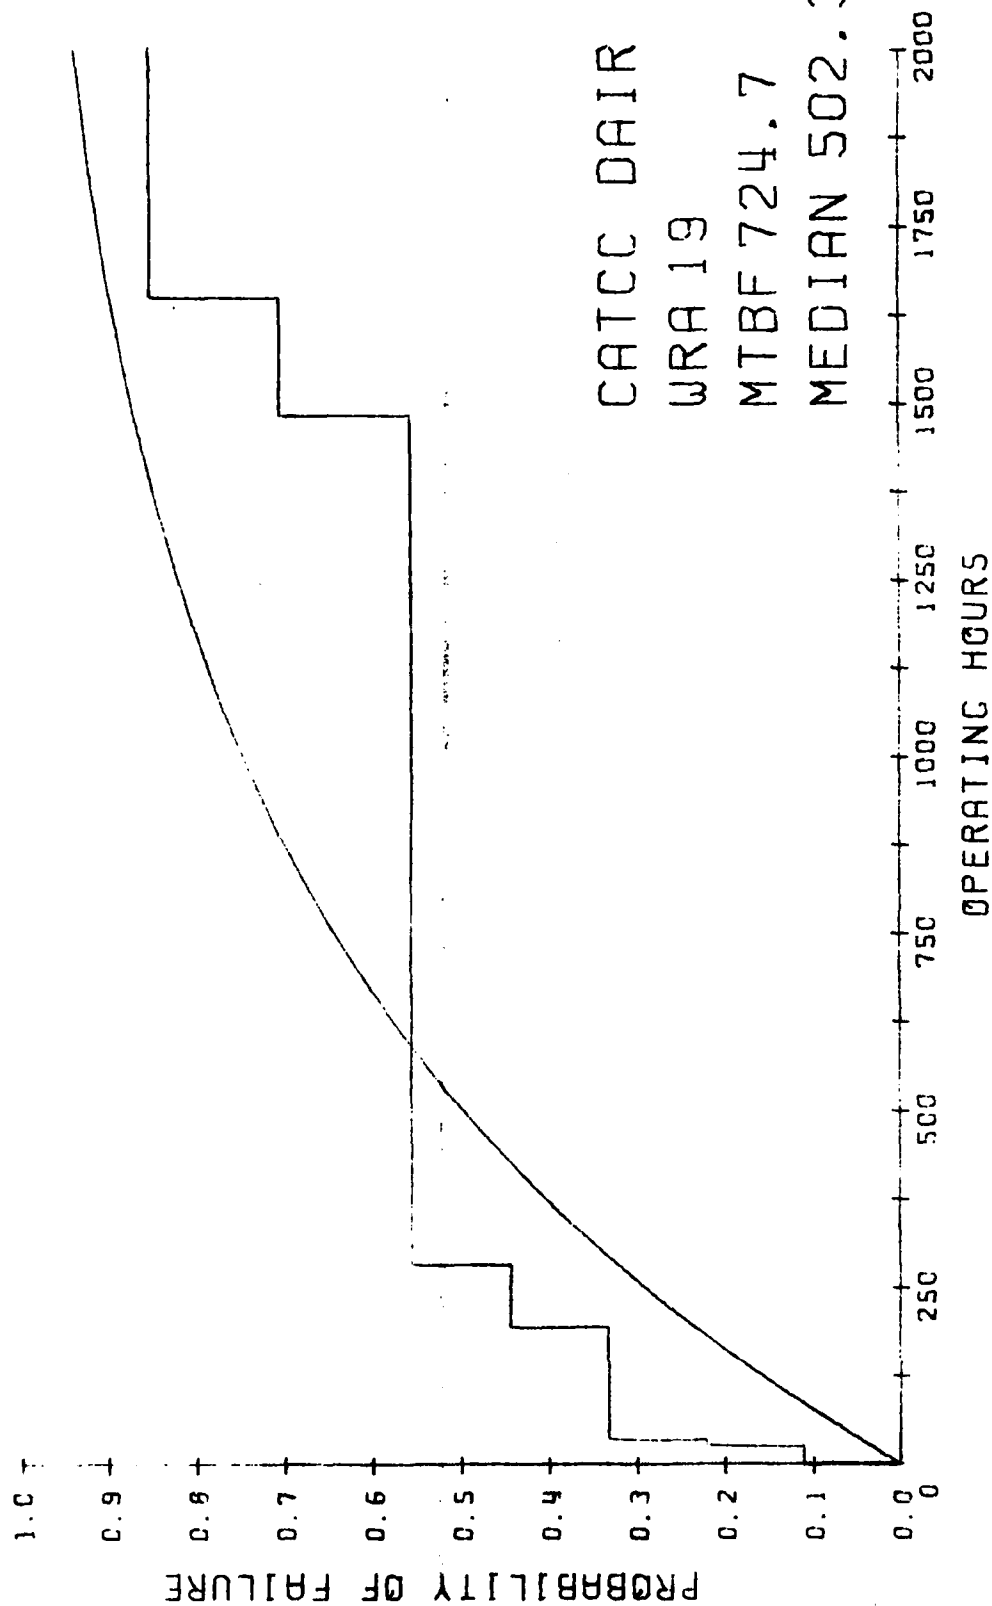

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
WEIBULL PROBABILITY DISTRIBUTION FOR TIME TO FAILURE

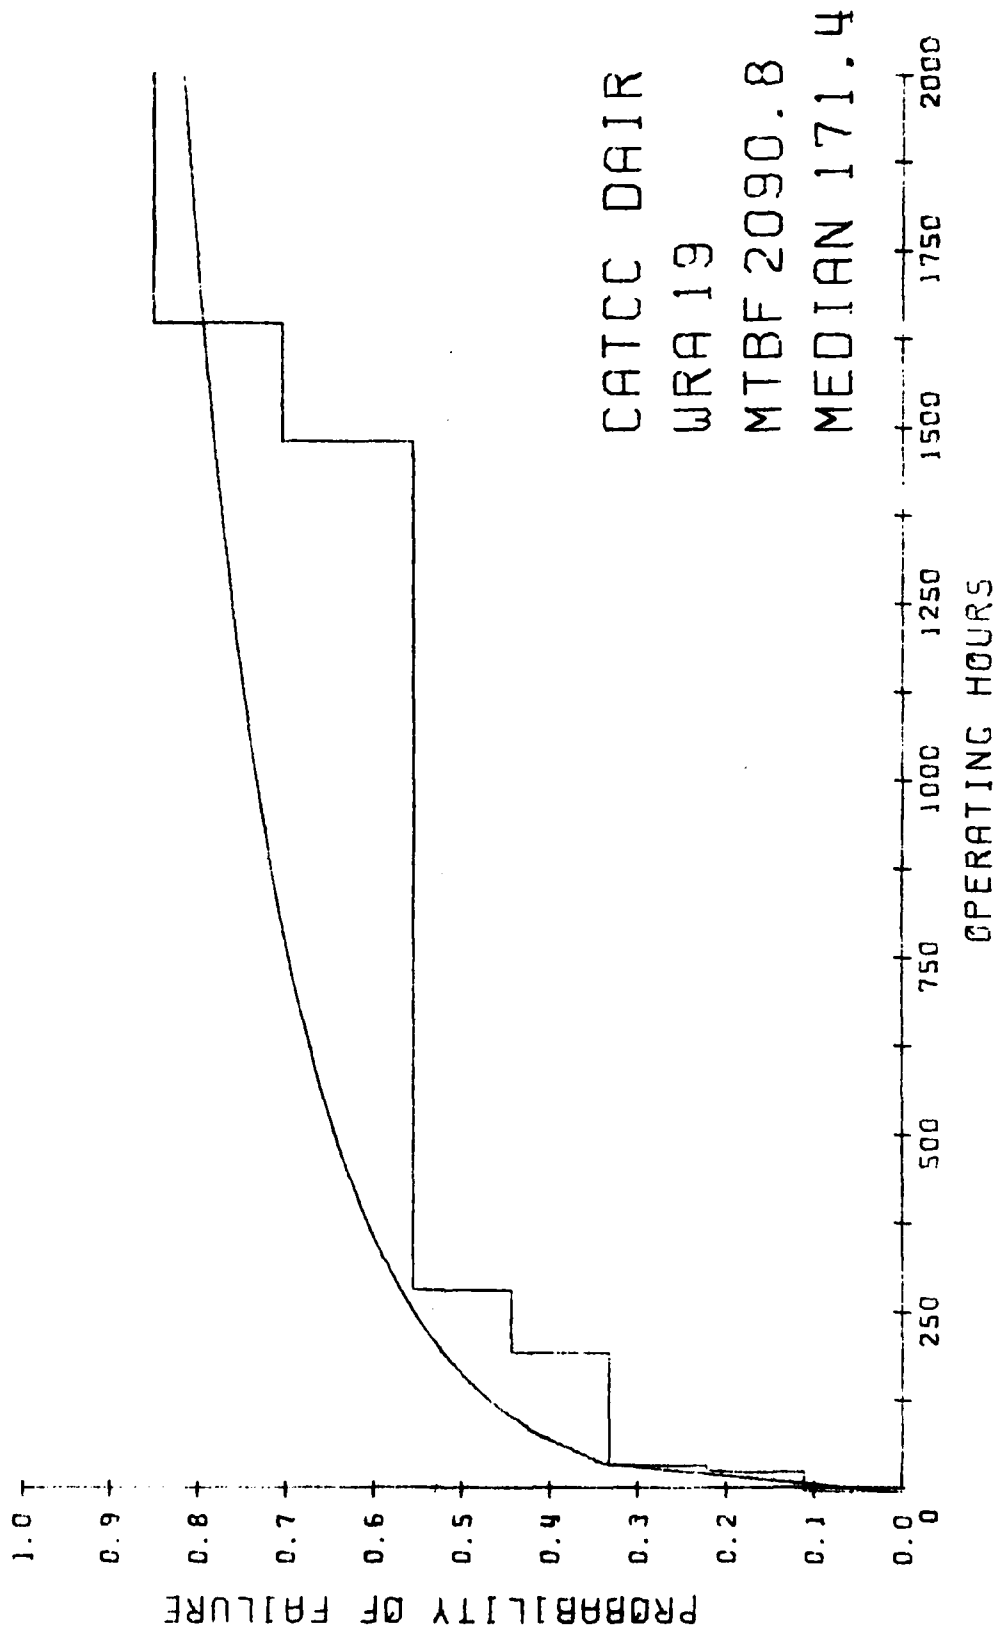

CATCC DAIR

URA 19

MTBF 2090.8

MEDIAN 171.4

R E L I A B I L I T Y

CATCC DATA O-LEVEL SUMMARY

WRA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER FAILURES	LOWER 90 CONF LIM	MEAN	UPPER 90 CONF LIM	SPEC MTBF	OBSERVED FAILURE TIMES LOW	HIGH	RELIAB PROBLEM
11	99		1.	1304.21	5073.00	48149.20	1000000.00	30.00	30.00	YES
18	3	CRT DRIVER ELECTRONICS	1.	1304.21	5073.00	48149.20	22769.00	136.00	136.00	NO
19	2	DEFLECTION AMPLIFIER	3.	759.34	1691.00	4603.18	92808.00	1482.00	3646.00	YES
19	8	INTERFACE AND LOGIC	1.	1304.21	5073.00	48149.20	23702.00	3610.00	3610.00	NO
19	9	VIDEO AMPLIFIER	1.	1304.21	5073.00	48149.20	54885.00	3131.00	3131.00	YES
19	16	PANEL (RIGHT SIDE)	1.	1304.21	5073.00	48149.20	24499.00	3326.00	3326.00	NO

R E L I A B I L I T Y
 2K SUMMARY FOR CATCC DAIKPROBLEM AREAS
 *RA 0-L 0-L 0-L WHAT HAPPENED

JCN

FLEET MAINTAINABILITY ASSESSMENT DATA

SYSTEM	SHIPNAME	DISCOVERED	COMPL	REPAIR TIME	DOWN TIME
CATCC DAIR	KITTY HAWK	8286	8288	0.	0.
CATCC DAIR	KITTY HAWK	8321	8321	6.	6.
CATCC DAIR	KITTY HAWK	8321	8321	1.	1.
CATCC DAIR	KITTY HAWK	8348	8348	0.	0.
		NO REPAIR TIME FOR THE ABOVE RECORD			
CATCC DAIR	HANGER	8307	8314	110.	168.
CATCC DAIR	HANGER	9049	9053	10.	96.
CATCC DAIR	HANGER	9058	9058	6.	8.
CATCC DAIR	HANGER	9074	9075	1.	24.
CATCC DAIR	HANGER	9080	9087	2.	168.
CATCC DAIR	HANGER	9104	9117	2.	312.

MAINTAINABILITY (REPAIR TIME)

CALC DATA SYSTEM LEVEL

REPAIR TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	2.	2.0	.222	.163	.056	.219
2.0	2.	4.0	.444	.296	.108	.312
6.0	1.	5.0	.556	.566	.290	.516
6.0	1.	6.0	.667	.637	.367	.578
16.0	1.	7.0	.778	.689	.435	.627
116.0	1.	8.0	.889	.979	.998	.985

TOTAL REPAIR HOURS = 140.0 NUMBER OF REPAIRS = 8. OBSERVED REPAIR RATE/HR = .5714E-01

DISTRIBUTION DETERMINATION

MEAN OF LNFS = 1.53 STD DEV OF LNFS = 1.56

K-S CRITICAL VALUE (.10, 8) = .261 MAX DIFF CALC = .201 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

EST MEAN = 17.50 EST MEDIAN = 4.63 90 PER CENT LCL ON MEDIAN = 2.12 90 PER CENT UCL ON MEDIAN = 10.12
 SPECIFIED MTR = 2.00 HOURS LOWER CONF LIM 2.12 IS GREATER THAN MTR, THUS A MAINTAINABILITY PROBLEM EXISTS

AD-A093 921

NAVAL WEAPONS SUPPORT CENTER CRANE IN
FLEET RELIABILITY ASSESSMENT PROGRAM. VOLUME 2A. EQUIPMENT REPO--ETC(U)
SEP 79

F/G 17/7

UNCLASSIFIED


NL

20P
21 3 2



END
DATE
FILMED
2 - 8h
DTIC

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

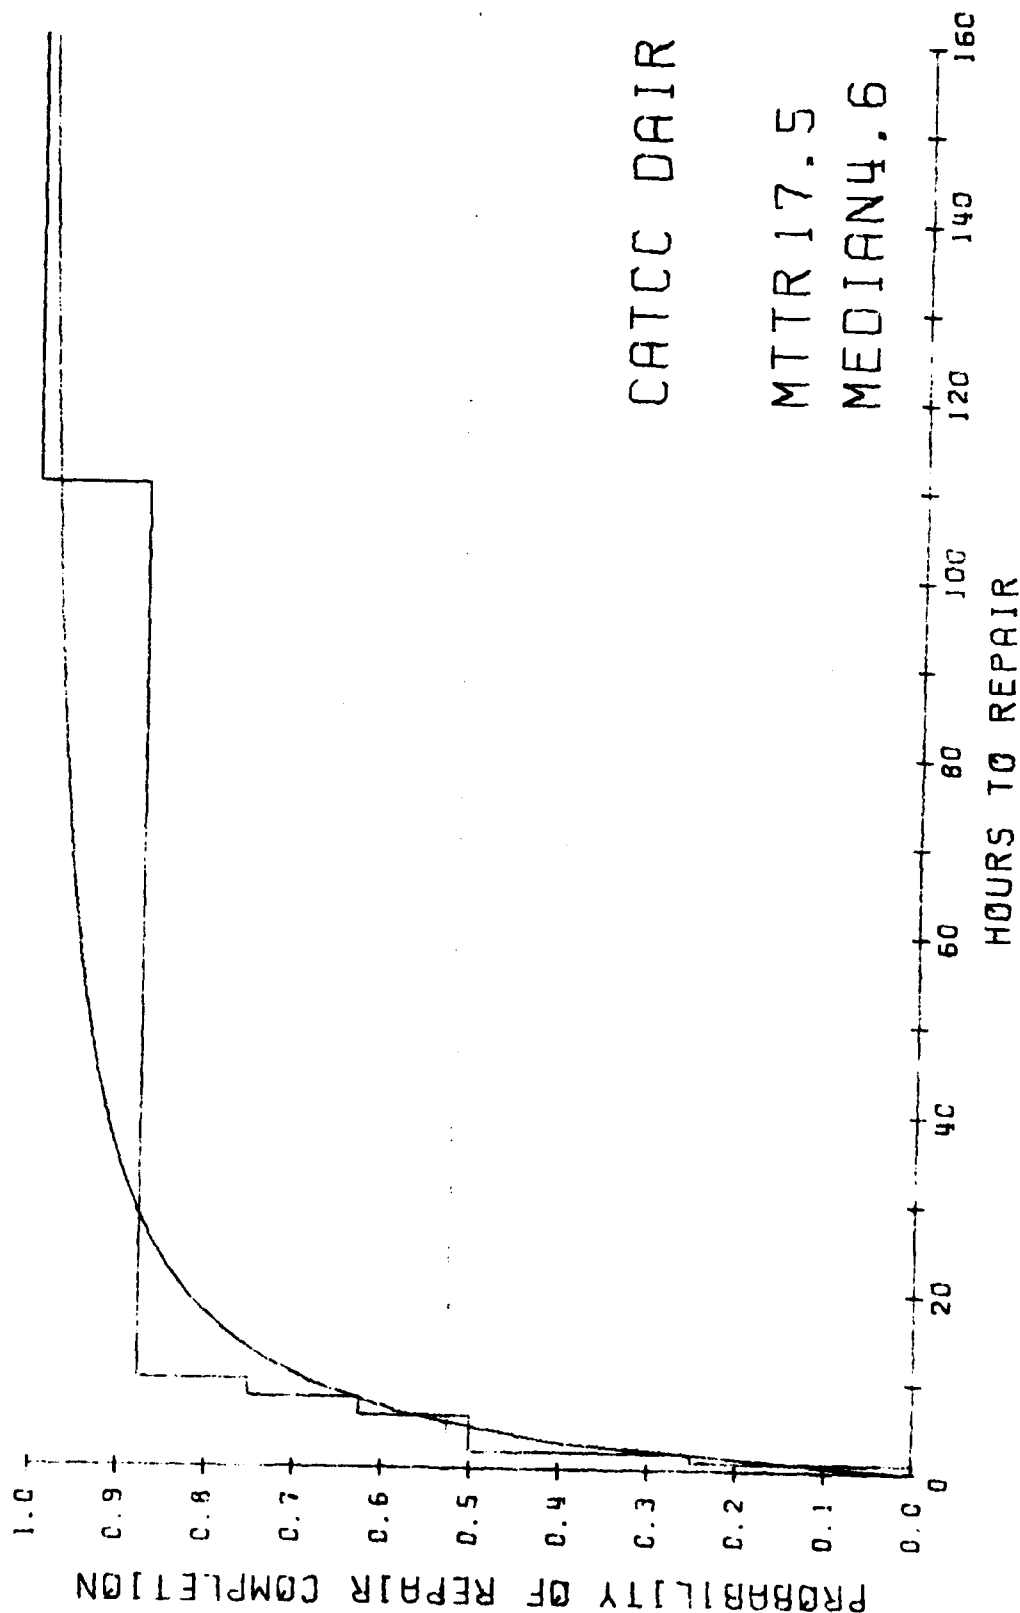

CATCC DAIR

MTTR 17.5

MEDIAN 4.6

MAINTAINABILITY (DOWN TIME)

CAICC DAIR SYSTEM LEVEL

DOWN TIME	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.111	.044	.010	.052
6.0	1.	2.0	.222	.206	.059	.164
6.0	1.	3.0	.333	.249	.078	.196
24.0	1.	4.0	.444	.446	.217	.366
96.0	1.	5.0	.556	.709	.625	.686
168.0	2.	7.0	.778	.796	.820	.815
312.0	1.	8.0	.889	.871	.959	.923
TOTAL DOWN TIME (TOT) = 783.0			OBSERVED DOWN TIME/REPAIR (TOT/NR) =		97.88	

DISTRIBUTION DETERMINATION

MEAN OF LNPS = 3.45 STD DEV OF LNPS = 2.03

K-S CRITICAL VALUE (.10, 8.) = .201 MAX DIFF CALC = .264 IS GREATER THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION CANNOT BE ASSUMED

RATIO OF 9.064 EXCEEDS THE CRITICAL VALUE FOR TEST OF EXPONENTIAL


THEREFORE THE EXPONENTIAL DISTRIBUTION CANNOT BE ASSUMED

WEIBULL DISTRIBUTION ASSUMED, ESTIMATED PARAMETERS ARE ALPHA = .53828E-01 BETA = .67239E+00


EST MEDIAN = 46.066 EST MEAN = 101.636 90 PER CENT LCL ON MEAN = 23.727 90 PER CENT UCL ON MEAN = 179.545

90 PER CENT LCL FOR BETA = .462323E+00 90 PER CENT UCL FOR BETA = .88245441E+00


CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL
LOGNORMAL PROBABILITY DISTRIBUTION FOR DOWN TIME

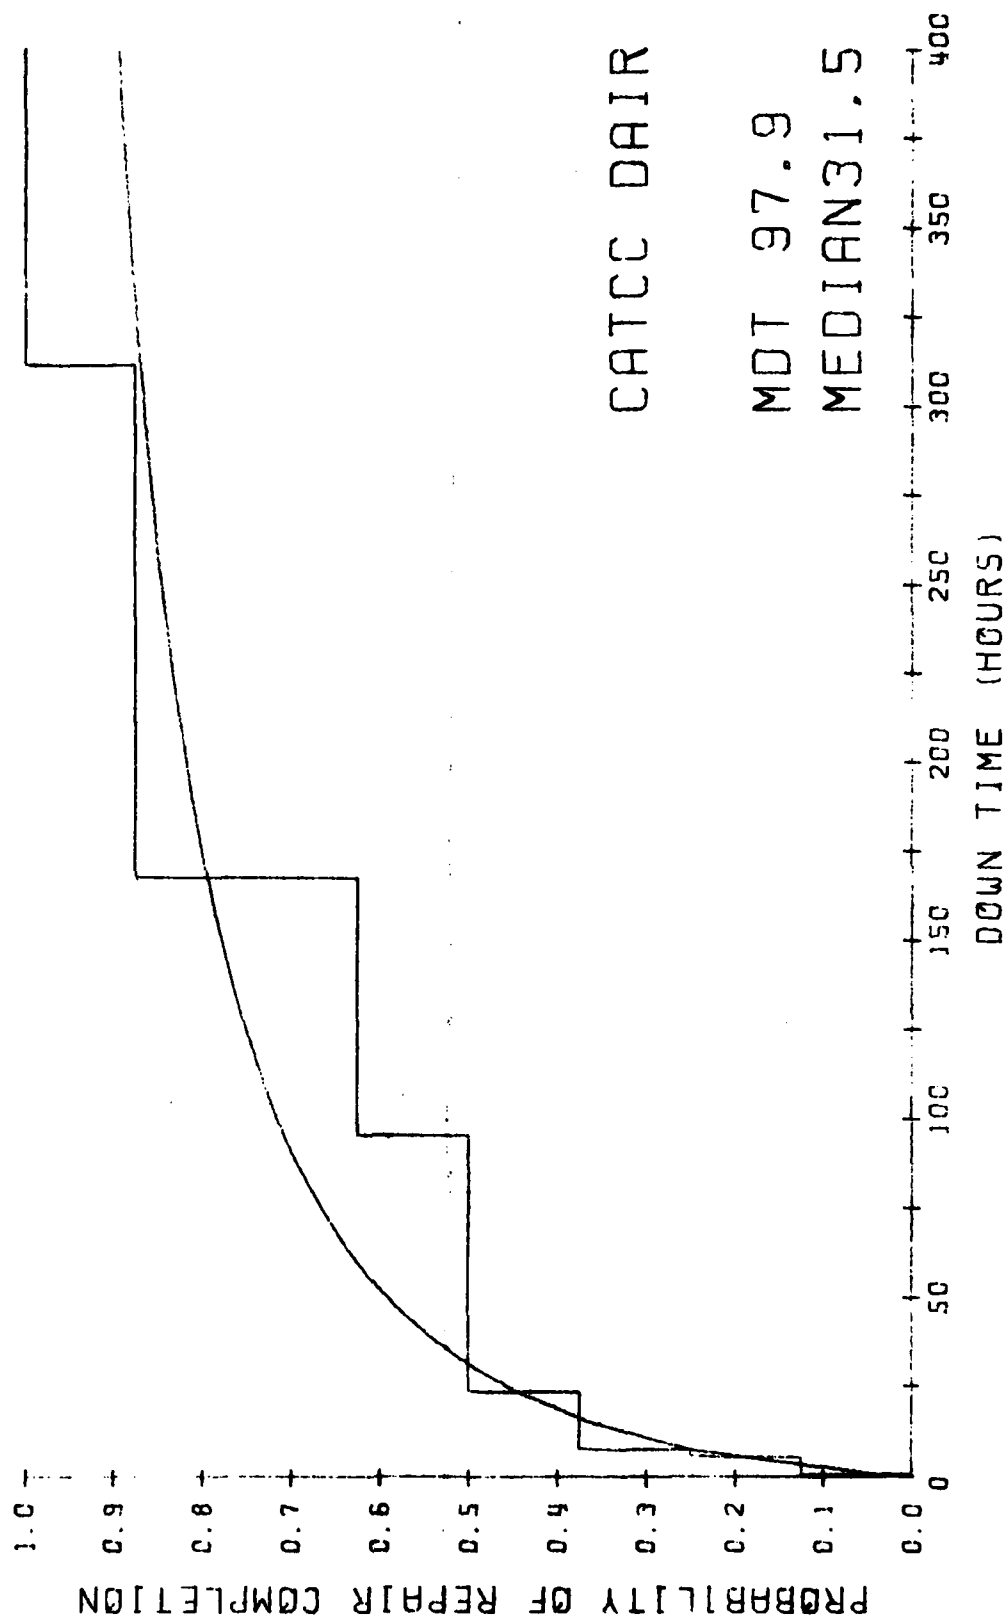

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL EXPONENTIAL PROBABILITY DISTRIBUTION FOR DOWN TIME

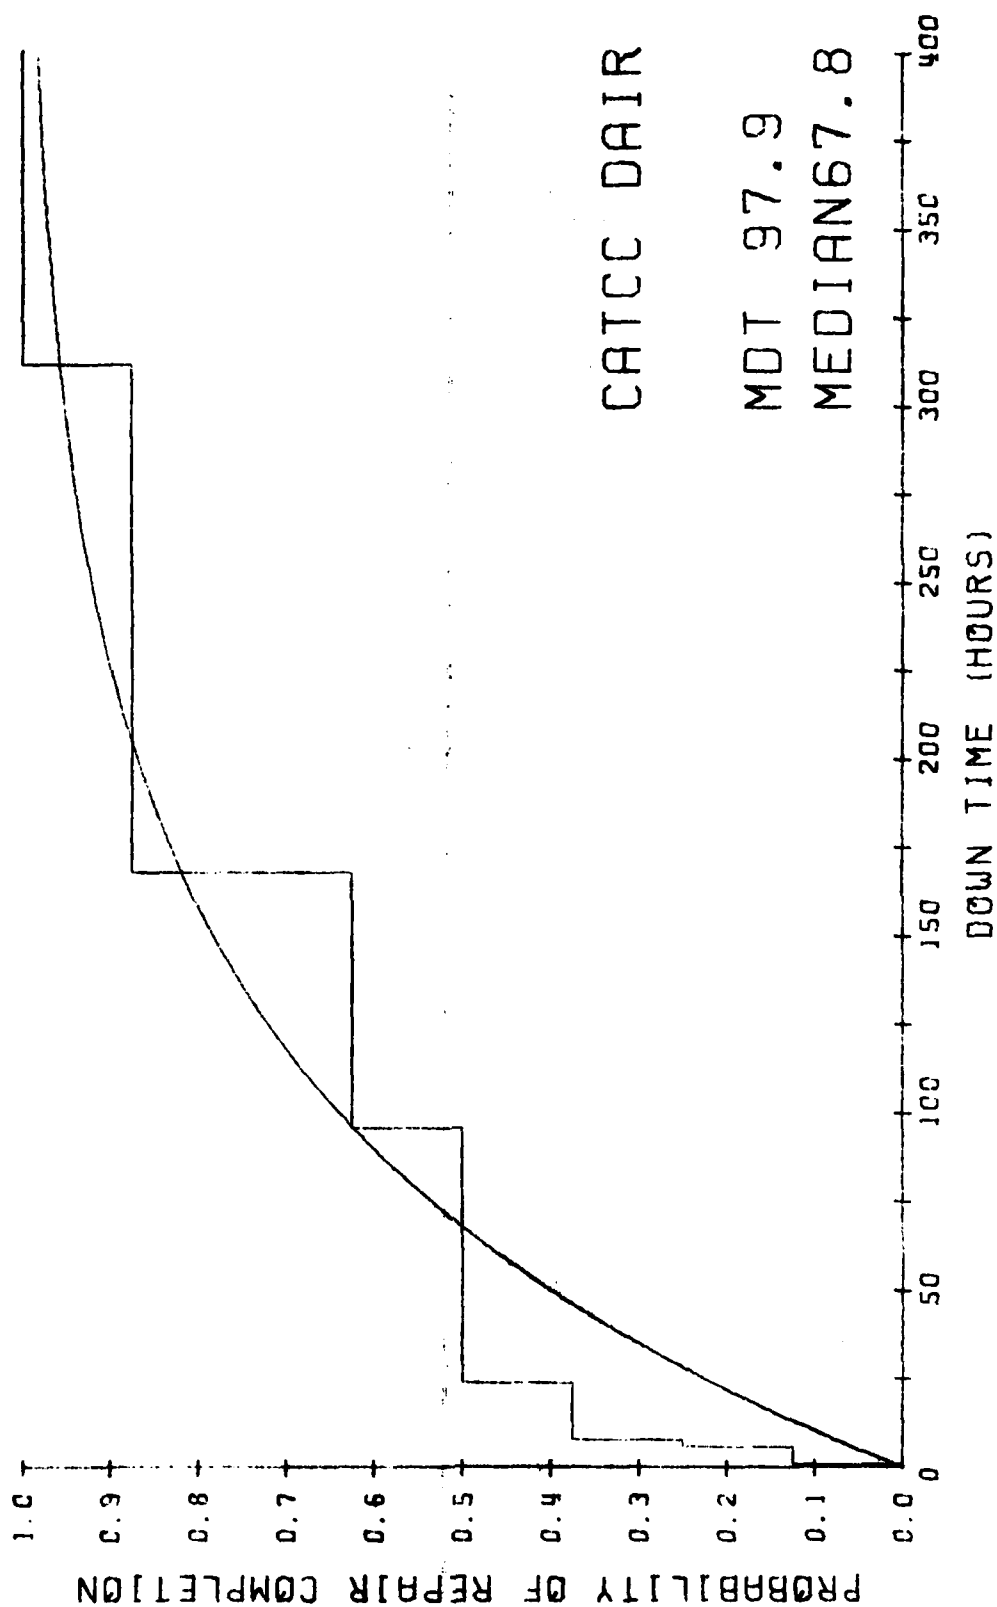

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL WEIBULL PROBABILITY DISTRIBUTION FOR DOWN TIME

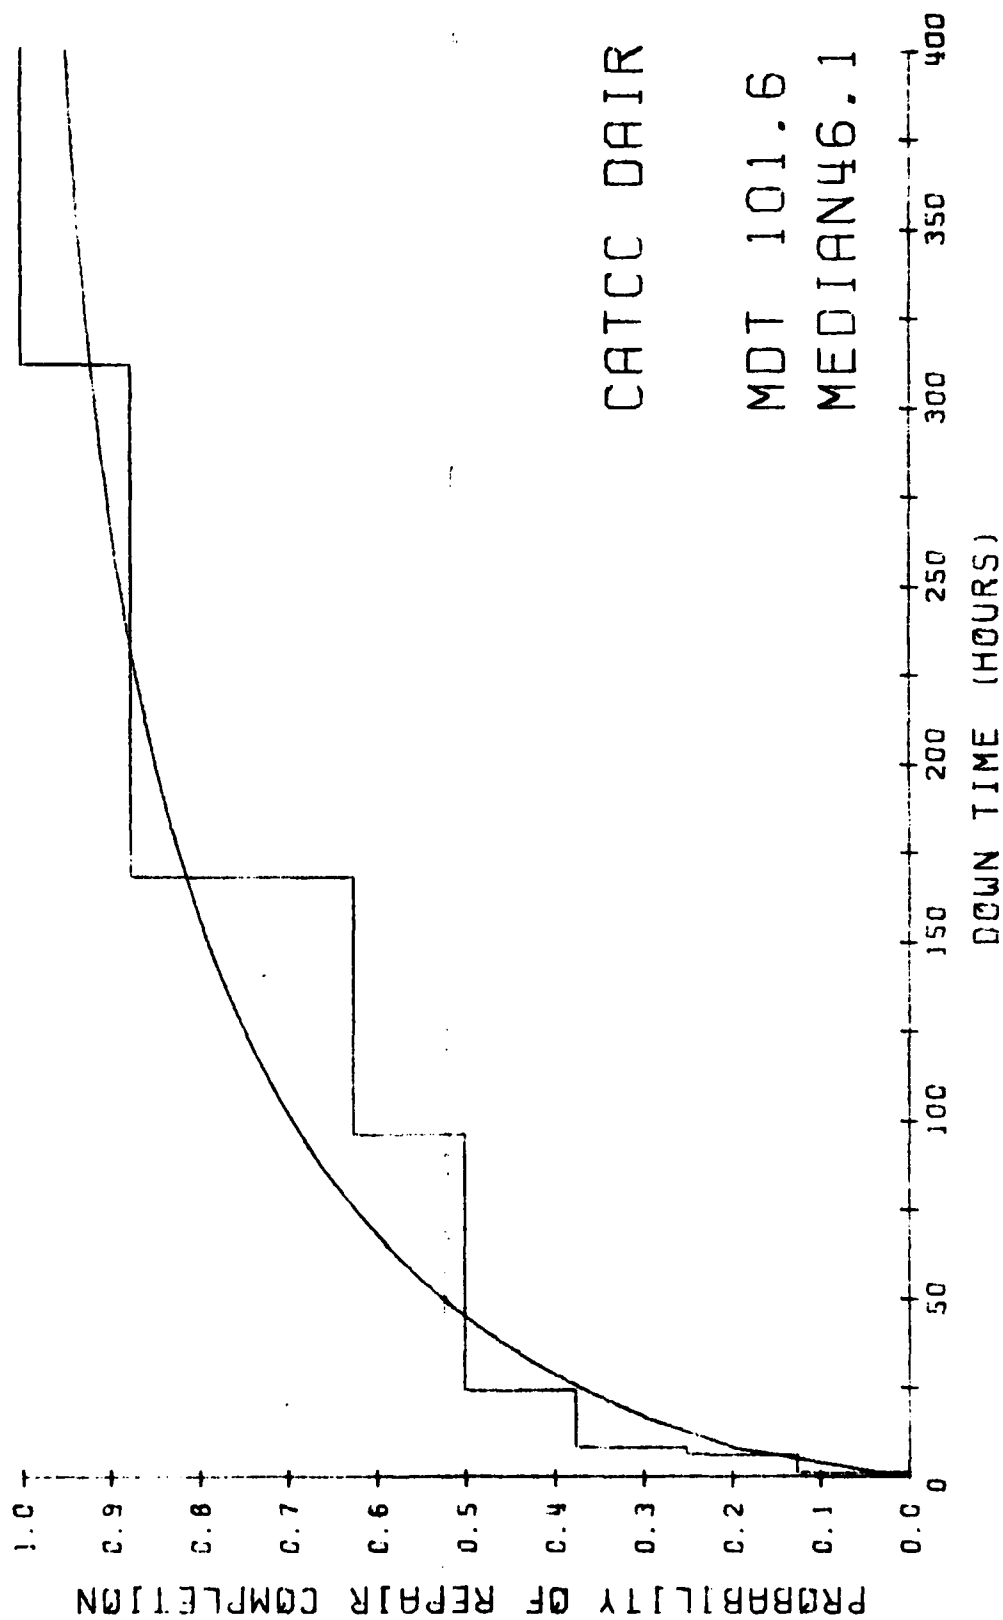

MAINTAINABILITY (REPAIR TIME)

CATCC OAIR WRA II LEVEL

LESS THAN FOUR DISTINCT REPAIR TIMES

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

ONLY ONE DISTINCT REPAIR TIME -- NO CONFIDENCE LIMITS

MAINTAINABILITY (REPAIR TIME)
CATCC DAIR WRA 19 LEVEL

REPAIR TIME,	FREQUENCY	CUM FREQUENCY	NPF	LOGNORMAL	EXPONENTIAL	WEIBULL
1.0	1.	1.0	.125	.129	.049	.187
2.0	2.	3.0	.375	.247	.096	.273
6.0	1.	4.0	.500	.510	.261	.469
8.0	1.	5.0	.625	.584	.332	.531
10.0	1.	6.0	.750	.639	.396	.581
110.0	1.	7.0	.875	.971	.996	.980

TOTAL REPAIR HOURS = 139.0 NUMBER OF REPAIRS = 7. OBSERVED REPAIR RATE/HR = .5036E-01

DISTRIBUTION DETERMINATION

MEAN OF LN'S = 1.75 STD DEV OF LN'S = 1.55


K-S CRITICAL VALUE (.10, 7.) = .276 MAX DIFF CALC = .221 IS LESS THAN THE CRITICAL VALUE

THEREFORE THE LOGNORMAL DISTRIBUTION IS ASSUMED

EST MEAN = 19.86 EST MEDIAN = 5.76 90 PER CENT LCL ON MEDIAN = 2.48 90 PER CENT UCL ON MEDIAN = 13.40

SPECIFIED MTTR = 2.00 HOURS LOWER CONF LIM 2.48 IS GREATER THAN MTTR, THUS A MAINTAINABILITY PROBLEM EXISTS

CUMULATIVE OBSERVED DISTRIBUTION VERSUS THEORETICAL LOGNORMAL PROBABILITY DISTRIBUTION FOR TIME TO REPAIR

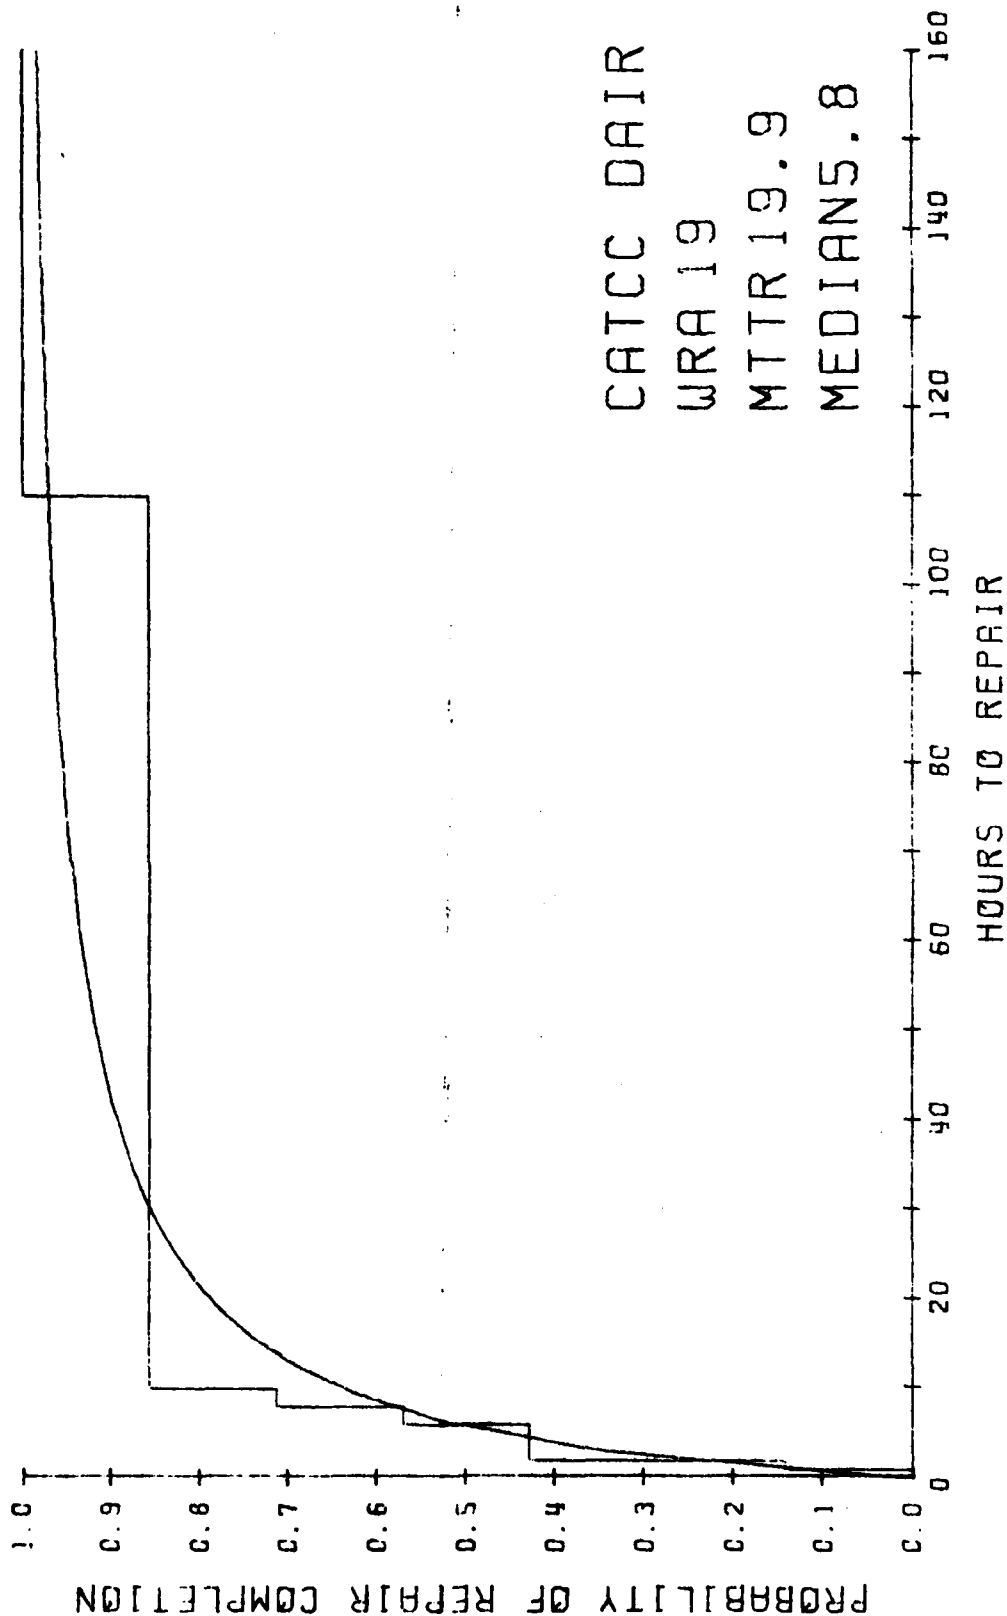

MAINTAINABILITY (REPAIR TIME)

CAICC DATA O-LEVEL SUMMARY

WHA	O-LEVEL BLOCK NO.	O-LEVEL NOMENCLATURE	NUMBER REPAIRS	LOWER 90 CONF LIM	UPPER 90 CONF LIM	SPEC MTR	OBSERVED REPAIR TIMES		MAINT PROBLEM
							LOW	MEAN	
11	99		1.	NO CONF LIMITS		2.0	1.0	1.00	1.0
19	2	DEFLECTION AMPLIFIER	3.	.38	95.67	2.0	1.0	37.67	110.0
19	8	INTERFACE AND LOGIC	1.	NO CONF LIMITS		2.0	2.0	2.00	2.0
19	9	VIDEO AMPLIFIER	1.	NO CONF LIMITS		2.0	10.0	10.00	10.0
19	16	PANEL (RIGHT SIDE)	1.	NO CONF LIMITS		2.0	8.0	0.00	8.0

MAINTAINABILITY (REPAIR TIME)

2K SUMMARY FOR CATCC DAIK PROBLEM AREAS

JCN	WNA	U-L	O-L	O-L	/EK	WHAT HAPPENED
33630E02M125	19	0	0	0		
33610E010740	19	2	0	0	*	
33610E010763	19	9	0	0		
33610E010777	19	16	0	0	/EK	
33610E100780	19	2	0	0		ANOTHER AMP FAILURE/SEE 1131/EK
33610E100780	19	8	0	0		ETM REPORTED AS 45014/CORRECTED/EK
33610E100789	19	2	0	0		ENT REPORTED AS 55054/EK

